

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

LEGEND OF THE TERMS AND ABBREVIATIONS USED ON FLOOR PLANS

樓面平面圖中所使用之名詞及簡稱之圖例

AC PLINTH	=	AIR-CONDITIONER PLINTH	冷氣機台
ACP	=	AIR-CONDITIONER PLATFORM	冷氣機平台
AF	=	ARCHITECTURAL FEATURE	建築裝飾
AL.C	=	ALUMINIUM PIPE COVER AT LOW LEVEL	位於低位鋁質管道覆蓋
ALUM. AF	=	ALUMINIUM ARCHITECTURAL FEATURE	鋁質建築裝飾
ALUM. CLAD	=	ALUMINIUM CLADDING	鋁質覆蓋層板
B	=	BATHROOM	浴室
B2	=	BATHROOM 2	浴室2
B3	=	BATHROOM 3	浴室3
BAL	=	BALCONY	露台
BAL ABOVE	=	BALCONY ABOVE	露台置上
BAL & UP ABOVE	=	BALCONY & UTILITY PLATFORM ABOVE	露台及工作平台置上
BUILDING LINE ABOVE AT 45/F	=	BUILDING LINE ABOVE AT 45/F	建築物界線置上在45樓
BR2	=	BEDROOM 2	睡房2
BR3	=	BEDROOM 3	睡房3
BR4	=	BEDROOM 4	睡房4
BW	=	BAY WINDOW	窗台
COMMON AREA	=	COMMON AREA	公共範圍
COMMON FLAT ROOF	=	COMMON FLAT ROOF	公共平台
COMMON FLAT ROOF AT 15/F	=	COMMON FLAT ROOF AT 15/F	公共平台在15樓
CW	=	CURTAIN WALL	幕牆
DH	=	DOG HOUSE	室外管道檢修井
D	=	DOWN	落
ELV / ELV.	=	EXTRA LOW VOLTAGE DUCT	特低電壓管道
EMC	=	ELECTRIC METER CABINET	電錶櫃
EMR	=	ELECTRIC METER ROOM	電錶房
FLAT ROOF	=	FLAT ROOF	平台
GLASS CLAD	=	GLASS CLADDING	玻璃外牆飾面
HR	=	HOSE REEL	消防喉轆
KIT	=	KITCHEN	廚房
LAV	=	LAVATORY	洗手間
LIFT	=	LIFT	升降機
LIFT MACHINE ROOM	=	LIFT MACHINE ROOM	升降機機房
LIV/ DIN	=	LIVING ROOM AND DINING ROOM	客廳及飯廳
MB	=	MASTER BATHROOM	主人浴室
MBR	=	MASTER BEDROOM	主人睡房
M.S.	=	MAINTENANCE ACCESS SPACE FOR GONDOLA	供吊船使用之維修通道空間
O.KIT	=	OPEN KITCHEN	開放式廚房
P.	=	PLANTER	花槽
PD	=	PIPE DUCT	管道
POWDER	=	POWDER ROOM	化妝室
RS&MRR	=	REFUSE STORAGE AND MATERIAL RECOVERY ROOM	垃圾及物料回收室

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

SINK	=	SINK	洗滌盆
STO	=	STORE ROOM	儲物房
TOP OF BAL	=	TOP OF BALCONY	露台上蓋
TOP OF BAL & UP	=	TOP OF BALCONY & UTILITY PLATFORM	露台及工作平台上蓋
TOP OF CW	=	TOP OF CURTAIN WALL	幕牆上蓋
TOWER 1A LIFT LOBBY	=	TOWER 1A LIFT LOBBY	第1A座升降機大堂
TOWER 1B LIFT LOBBY	=	TOWER 1B LIFT LOBBY	第1B座升降機大堂
UP	=	UTILITY PLATFORM	工作平台
U	=	UP	上
UTI.	=	UTILITY ROOM	工作間
V.D.	=	VENTILATION DUCT	通風管道
WMC	=	WATER METER CABINET	水錶櫃
A.BAL 2	=	ENHANCED ACOUSTIC BALCONY (BAFFLE TYPE) (TYPE 2)	強效減音露台(擋音式)(款式2)
AW1	=	ACOUSTIC WINDOW (BAFFLE TYPE) WITH MICRO-PERFORATED ABSORPTION PANEL	減音窗(擋音式)有微孔吸音板
AW1 (6-12/F ONLY)	=	ACOUSTIC WINDOW (BAFFLE TYPE) WITH MICRO-PERFORATED ABSORPTION PANEL (6-12/F ONLY)	減音窗(擋音式)有微孔吸音板 (只限6至12樓)
AW1 (15-20/F ONLY)	=	ACOUSTIC WINDOW (BAFFLE TYPE) WITH MICRO-PERFORATED ABSORPTION PANEL (15-20/F ONLY)	減音窗(擋音式)有微孔吸音板 (只限15至20樓)
AW1 (15-23/F AND 25-26/F ONLY)	=	ACOUSTIC WINDOW (BAFFLE TYPE) WITH MICRO-PERFORATED ABSORPTION PANEL (15-23/F AND 25-26/F ONLY)	減音窗(擋音式)有微孔吸音板 (只限15至23樓及25至26樓)
AW3	=	ACOUSTIC WINDOW (BAFFLE TYPE) WITH MICRO-PERFORATED ABSORPTION PANEL AND SOUND ABSORPTIVE MATERIAL	減音窗(擋音式)有微孔吸音板及吸音材料
FG	=	FIXED GLAZING	固定窗戶
FG (15-23/F AND 25-26/F ONLY)	=	FIXED GLAZING (15-23/F AND 25-26/F ONLY)	固定窗戶(只限15至23樓及25至26樓)
GSP	=	GLAZED SLIDING PANEL (WITH MICRO-PERFORATED ABSORPTION PANEL FACING OUTSIDE & SOUND ABSORPTIVE MATERIAL ON THE FRAME)	玻璃趟板(向外裝有微孔吸音板及框上裝有吸音材料)
M.W.	=	FIXED GLAZING WITH MAINTENANCE WINDOW (NOT FOR VENTILATION USE)	固定窗戶連維修窗 (不作通風用途)
M.W. (15-23/F AND 25-26/F ONLY)	=	FIXED GLAZING WITH MAINTENANCE WINDOW (NOT FOR VENTILATION USE) (15-23/F AND 25-26/F ONLY)	固定窗戶連維修窗 (不作通風用途) (只限15至23樓及25至26樓)

<u>Notes:</u>	<u>附註:</u>
1. There may be architectural features on external walls of some floors.	1 部份樓層外牆設有建築裝飾。
2. Common pipes exposed and/ or enclosed in cladding are located at/ adjacent to balcony and/ or flat roof and/ or utility platform and/or air-conditioning platform and/ or external wall of some residential units.	2. 部份住宅單位的露台及 / 或平台及 / 或工作平台及 / 或冷氣機平台及 / 或外牆設有外露及 / 或面板內藏之公用喉管。
3. There are sunken slabs and/ or ceiling bulkheads and/ or false ceiling at living rooms, dining rooms, bedrooms, utility rooms, corridors, bathrooms, store rooms, lavatories, open kitchens and kitchens of some residential units for the air-conditioning system and/ or mechanical and electrical services. There are exposed pipes and/ or ductings for air-conditioning system and/ or mechanical and electrical services within some utility rooms.	3. 部份住宅單位的客廳、飯廳、睡房、工作間、走廊、浴室、儲物房、洗手間、開放式廚房以及廚房天花有跌級樓板及 / 或假陣及 / 或假天花用以裝置冷氣系統及 / 或機電設備。部份工作間內設有冷氣系統及 / 或機電設備之外露喉管及 / 或管道。
4. Balconies and utility platforms are non-enclosed areas.	4. 露台及工作平台為不可封閉的地方。
5. Symbols of fittings and fitments shown on the floor plans, such as bathtubs, sink, water closets, shower, sink counter etc, are architectural symbols extracted from the latest approved general building plans for general indication only.	5. 樓面平面圖上所顯示的形象裝置符號例如浴缸、洗滌盆、坐廁、花灑、洗滌盆櫃等乃摘自最新的經批准的建築圖則，只作一般性標誌。
6. There are non-structural prefabricated external walls and curtain walls in the residential units. The saleable area as defined in the Formal Agreement for Sale and Purchase of a residential unit has included the area of the non-structural prefabricated external walls and curtain walls, and is measured from the exterior of such non-structural prefabricated external walls and curtain walls.	6. 住宅單位有非結構的預製外牆及幕牆。住宅單位之正式買賣合約內所定義之實用面積已包括非結構的預製外牆及幕牆的面積，並由該非結構的預製外牆及幕牆之外圍起計。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

- Notes:
- 7. During the necessary maintenance of the external wall of Tower 1 (Tower 1A & 1B) arranged by the Manager of the Phase, the gondola will be operating in the airspace outside windows and above and on the roof / flat roof / the parapet walls.
 - 8. Noise mitigation measures include fixed glazing, fixed glazing with maintenance window(s) (not for ventilation purpose), acoustic window(s) (baffle type) with micro-perforated absorption panel, acoustic window(s) (baffle type) with micro-perforated absorption panel and sound absorptive material, glazed sliding panel (with micro-perforated absorption panel facing outside & sound absorptive material on the frame) and enhanced acoustic balcony(ies) (baffle type) (type 2) applied to selected residential properties of the Phase. Prospective purchasers should refer to the Floor Plans of Residential Properties in the Phase for the location of the fixed glazing, fixed glazing with maintenance window(s) (not for ventilation purpose), acoustic window(s) (baffle type) with micro-perforated absorption panel, acoustic window(s) (baffle type) with micro-perforated absorption panel and sound absorptive material, glazed sliding panel (with micro-perforated absorption panel facing outside & sound absorptive material on the frame) and enhanced acoustic balcony(ies) (baffle type) (type 2) . No owner of residential properties shall make or permit or suffer to be made any alteration or conversion or modification of the fixed glazing, fixed glazing with maintenance window(s) (not for ventilation purpose), acoustic window(s) (baffle type) with micro-perforated absorption panel, acoustic window(s) (baffle type) with micro-perforated absorption panel and sound absorptive material, glazed sliding panel (with micro-perforated absorption panel facing outside & sound absorptive material on the frame) and enhanced acoustic balcony(ies) (baffle type) (type 2) or other installation(s) without the prior written consent of the Building Authority and other relevant Government authorities.

- 附註:
- 7. 在期數管理人安排於第1座（第1A座及第1B座）外牆之必要維修期間，吊船將在該等單位之窗戶外及天台/平台/護牆之上及其上空運作。
 - 8. 噪音緩解措施包括適用於期數的個別住宅物業的固定窗戶 、固定窗戶連維修窗（不作通風用途）、減音窗(擋音式)有微孔吸音板、減音窗(擋音式)有微孔吸音板及吸音材料 、玻璃趟板(向外裝有微孔吸音板及框上裝有吸音材料)及強效減音露台(擋音式)(款式2)。準買家應參閱期數的住宅物業的樓面平面圖以了解固定窗戶 、固定窗戶連維修窗（不作通風用途）、減音窗(擋音式)有微孔吸音板、減音窗(擋音式)有微孔吸音板及吸音材料 、玻璃趟板(向外裝有微孔吸音板及框上裝有吸音材料)及強效減音露台(擋音式)(款式2)的位置。若沒有建築事務監督及其他政府有關當局的事先書面同意，住宅物業的業主不可作出或允許或忍受他人作出對固定窗戶 、固定窗戶連維修窗（不作通風用途）、減音窗(擋音式)有微孔吸音板、減音窗(擋音式)有微孔吸音板及吸音材料 、玻璃趟板(向外裝有微孔吸音板及框上裝有吸音材料)及強效減音露台(擋音式)(款式2)或其他裝置的任何改動或變更或修改。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

Block Name 大廈名稱	Floor 樓層	Flat 單位														
Tower 1 (Tower 1A & Tower 1B) 第1座 (第1A座及第1B座)	3/F 3樓		A1	A2	A3	A5	A6	A7	A8	B1	B2	B3	B5	B6	B7	B8
		Floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2640, 2690, 2740, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2690, 2740, 2790, 2940, 3040	2640, 2690, 2740, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2690, 2740, 3040	2740, 2790, 3040	2740, 2790, 2940, 3040
		The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板的厚度 (不包括灰泥) (毫米)	150	150	150	150	150	150	150	150	150	150	150	150	150	150

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floor and hence internal areas of those residential properties will not be increased.)

因住宅物業的較高的樓層結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數的住宅物業，因期數的設計是不牽涉較高樓層的住宅物業的結構牆的厚度遞減。因此，該等住宅物業的內部面積不會增加。）

Notes:

1. The dimensions of floor plan are all structural dimensions in millimetre.
2. Please refer to Page AL001 - AL002 of this sales brochure for remarks and legend of the terms and abbreviations shown on this floor plan.
3. Dotted line in a residential unit with open kitchen delineates the extent of open kitchen area.

Extent of Open Kitchen Area
4. Maintenance windows at fixed glazing with maintenance window (not for ventilation purpose) are openable for maintenances only.

備註:

1. 樓面平面圖所列之尺寸數字以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第AL001-AL002頁之附註及圖例以協助解讀此部份的平面圖及其顯示之名詞及簡稱。
3. 設有開放式廚房的住宅單位內所顯示的虛線代表開放式廚房範圍。

開放式廚房範圍
4. 固定式窗戶連維修窗（不作通風用途）中的維修窗戶只能在作維修時開啟。

Tower 1 (Tower 1A & Tower 1B) 3/F
第1座 (第1A座及第1B座) 3樓



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

Block Name 大廈名稱	Floor 樓層	Flat 單位														
Tower 1 (Tower 1A & Tower 1B) 第1座 (第1A座及第1B座)	5/F - 11/F 5樓至11樓	Floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)	A1	A2	A3	A5	A6	A7	A8	B1	B2	B3	B5	B6	B7	B8
			2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2640, 2690, 2740, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2690, 2740, 2790, 2940, 3040	2640, 2690, 2740, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2690, 2740, 3040	2740, 2790, 3040	2740, 2790, 2940, 3040
		The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板的厚度 (不包括灰泥) (毫米)	150	150	150	150	150	150	150	150	150	150	150	150	150	150
	12/F 12樓	Floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2640, 2690, 2740, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2690, 2740, 2790, 2940, 3040	2640, 2740, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2690, 2740, 3040	2740, 2790, 3040	2690, 2740, 2940, 3040, 3640
		The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板的厚度 (不包括灰泥) (毫米)	150	150	150	150	150	150	150	150	150	150	150	150	150	150, 750

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floor and hence internal areas of those residential properties will not be increased.)

因住宅物業的較高的樓層結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數的住宅物業，因期數的設計是不牽涉較高樓層的住宅物業的結構牆的厚度遞減。因此，該等住宅物業的內部面積不會增加。）

Notes:

1. The dimensions of floor plan are all structural dimensions in millimetre.
2. Please refer to Page AL001 - AL002 of this sales brochure for remarks and legend of the terms and abbreviations shown on this floor plan.
3. Dotted line in a residential unit with open kitchen delineates the extent of open kitchen area.

Extent of Open Kitchen Area
4. Maintenance windows at fixed glazing with maintenance window (not for ventilation purpose) are openable for maintenances only.

備註:

1. 樓面平面圖所列之尺寸數字以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第AL001-AL002頁之附註及圖例以協助解讀此部份的平面圖及其顯示之名詞及簡稱。
3. 設有開放式廚房的住宅單位內所顯示的虛線代表開放式廚房範圍。


開放式廚房範圍
4. 固定式窗戶連維修窗（不作通風用途）中的維修窗戶只能在作維修時開啟。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

Tower 1 (Tower 1A & Tower 1B) 5/F-12/F

第1座 (第1A座及第1B座) 5樓至12樓

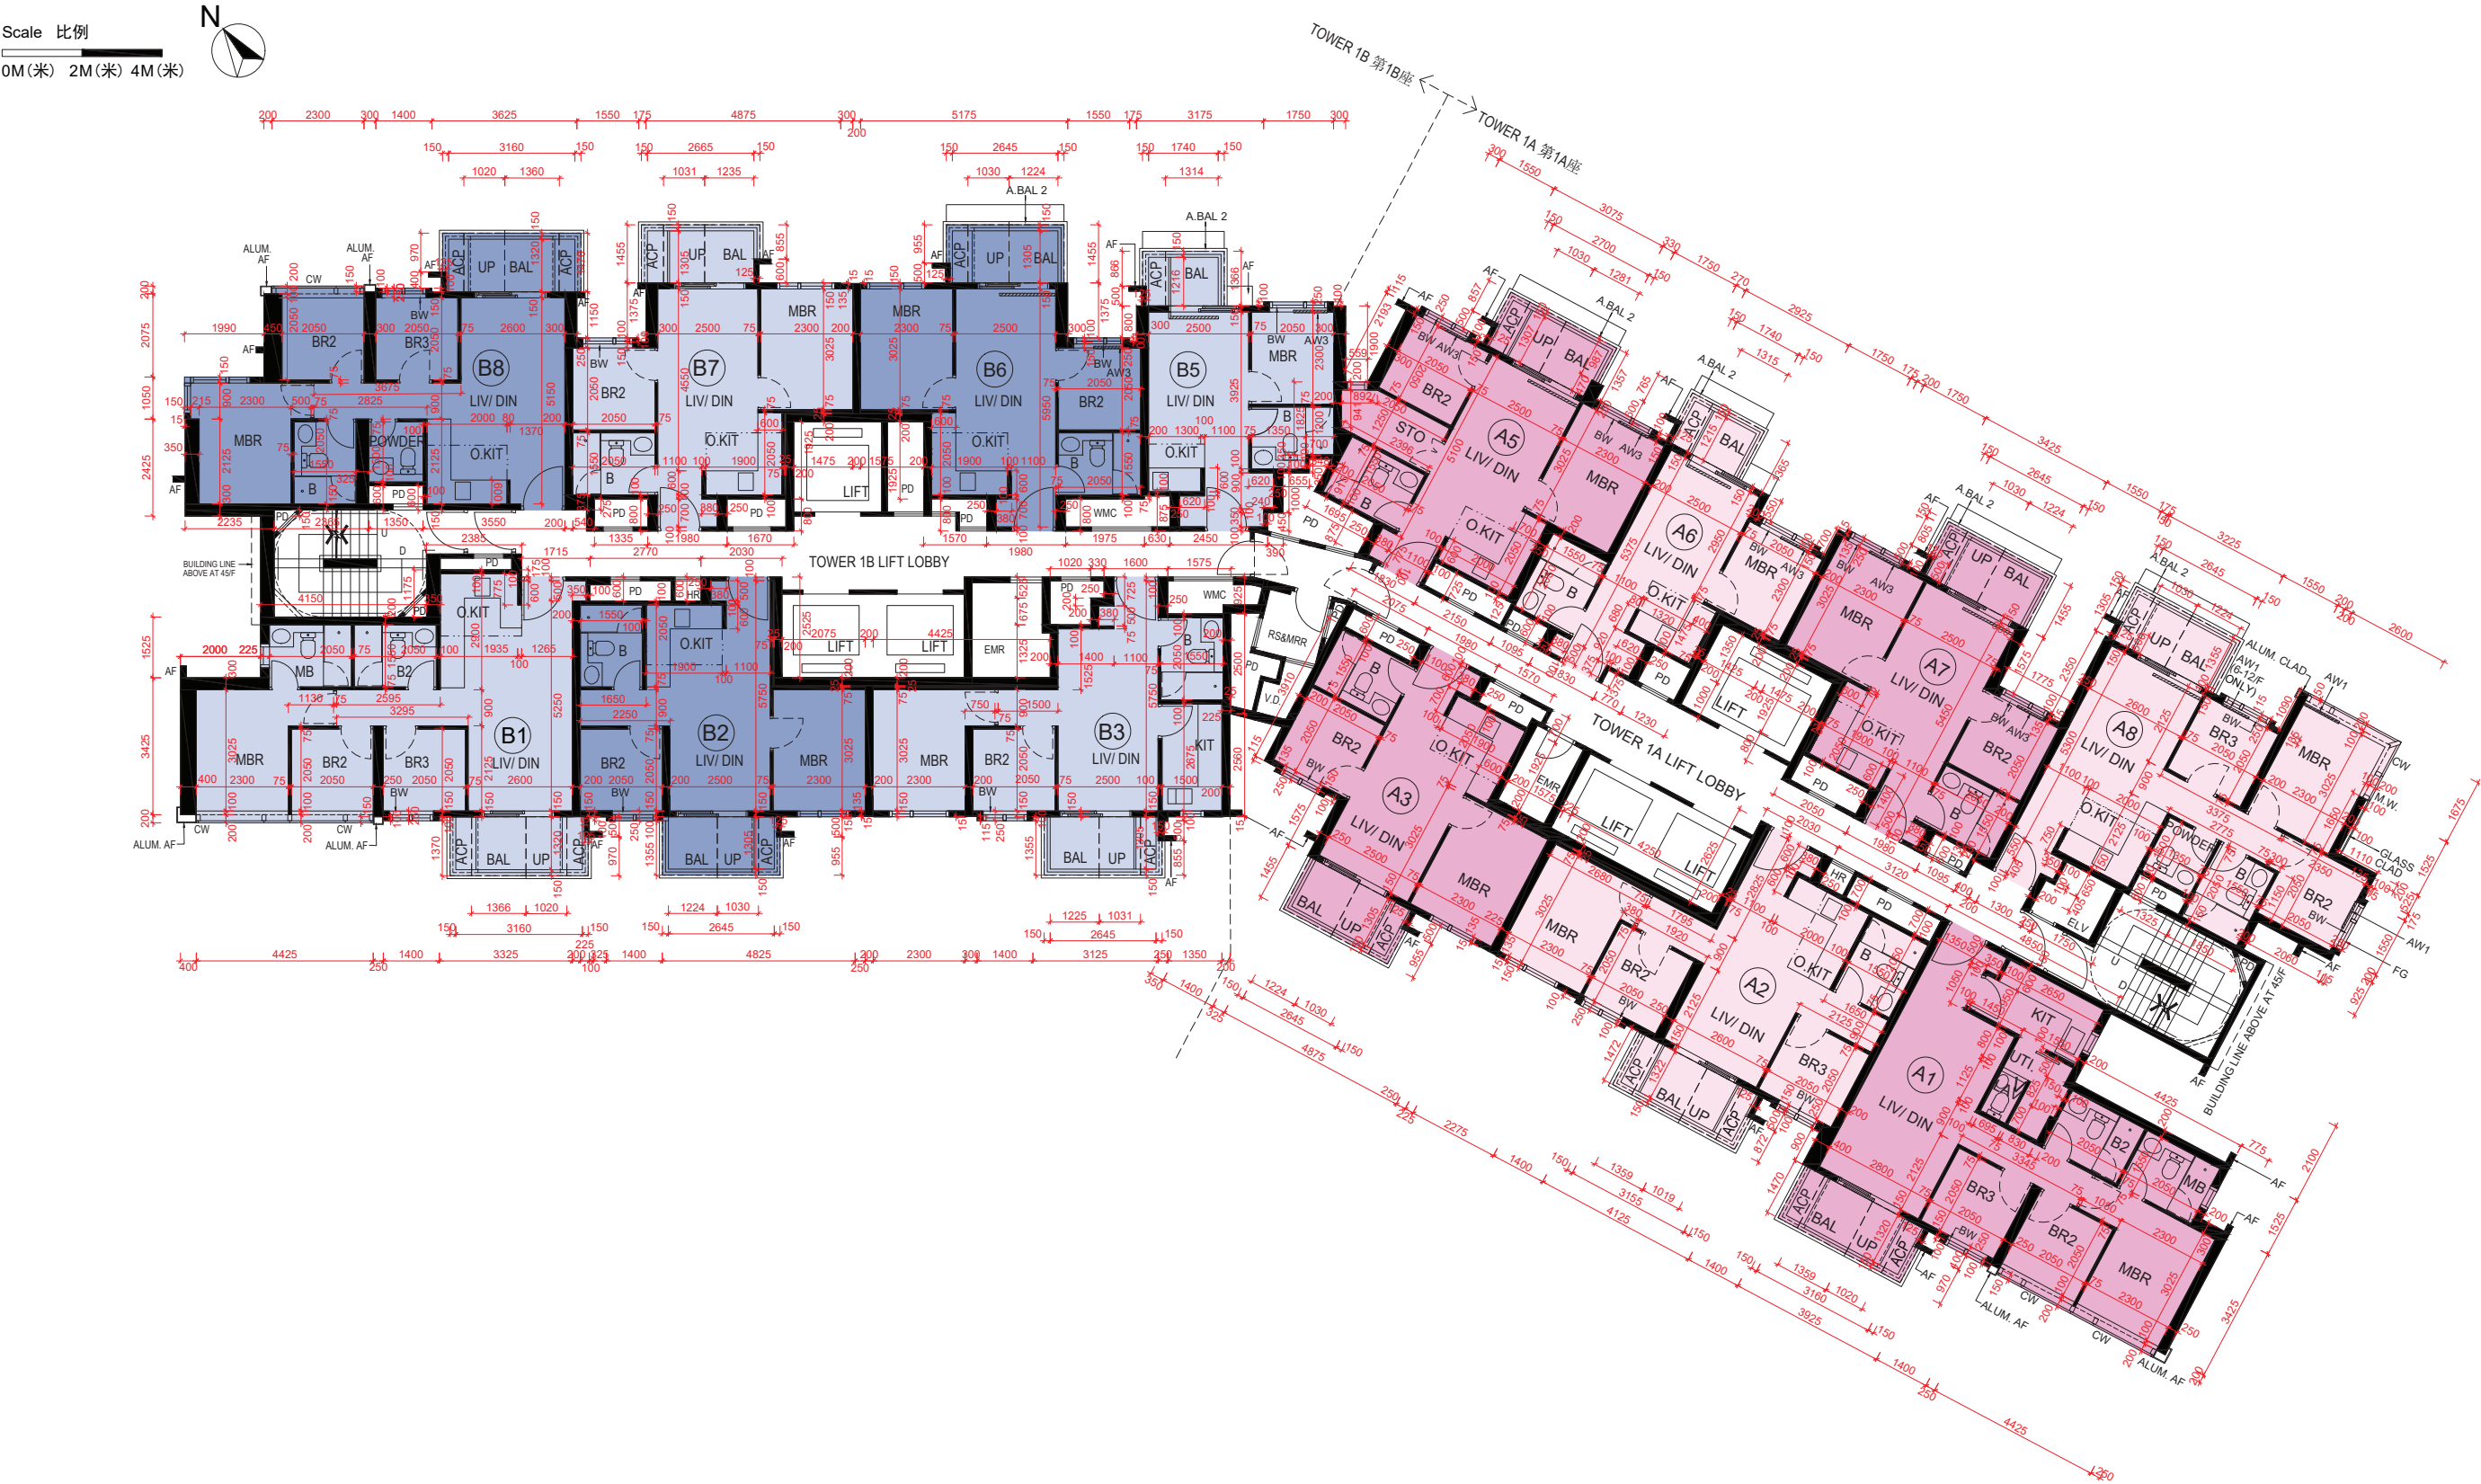

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖

Block Name 大廈名稱	Floor 樓層	Flat 單位														
Tower 1 (Tower 1A & Tower 1B) 第1座 (第1A座及第1B座)	15/F - 23/F, 25/F - 33/F & 35/F - 43/F 15樓至23樓、 25樓至33樓及 35樓至43樓	Floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度(毫米)	A1	A2	A3	A5	A6	A7	A8	B1	B2	B3	B5	B6	B7	B8
			2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2640, 2690, 2740, 3040	2740, 2790, 3040	2740, 2790, 2940, 3040	2740, 2790, 3040	2740, 2790, 2940, 3040	2690, 2740, 2790, 2940, 3040	2640, 2690, 2740, 2940, 3040	2740, 2790, 2940, 3040	2740, 2790, 2940, 3040	2690, 2740, 3040	2740, 2790, 3040	2740, 2790, 3040
		The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板的厚度(不包括灰泥)(毫米)	150	150	150	150	150	150	150	150	150	150	150	150	150	150
	45/F 45樓	Floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度(毫米)	3070, 3095, 3120, 3135, 3370	3070, 3270, 3335, 3370	2920, 3020, 3070, 3095, 3135, 3270, 3370	3070, 3120, 3370	3070, 3095, 3135, 3270, 3370	3070, 3095, 3135, 3270, 3370	2920, 2945, 3070, 3095, 3135, 3370	3070, 3095, 3120, 3135, 3370	3070, 3270, 3335, 3370	3020, 3070, 3095, 3135, 3270, 3370	3070, 3120, 3270, 3370	3020, 3070, 3370	2920, 3020, 3095, 3135, 3370	3020, 3070, 3270, 3335, 3370
		The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板的厚度(不包括灰泥)(毫米)	150	150, 200	150	150	150	150, 200	150	150	150, 200	150	150	150	150	150, 200

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floor and hence internal areas of those residential properties will not be increased.)


因住宅物業的較高的樓層結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數的住宅物業，因期數的設計是不牽涉較高樓層的住宅物業的結構牆的厚度遞減。因此，該等住宅物業的內部面積不會增加。）

- Notes:
- 1. The dimensions of floor plan are all structural dimensions in millimetre.
 - 2. Please refer to Page AL001 - AL002 of this sales brochure for remarks and legend of the terms and abbreviations shown on this floor plan.
 - 3. Dotted line in a residential unit with open kitchen delineates the extent of open kitchen area.
Extent of Open Kitchen Area
 - 4. Maintenance windows at fixed glazing with maintenance window (not for ventilation purpose) are openable for maintenances only.

- 備註:
- 1. 樓面平面圖所列之尺寸數字以毫米標示之建築結構尺寸。
 - 2. 請參閱本售樓說明書第AL001-AL002頁之附註及圖例以協助解讀此部份的平面圖及其顯示之名詞及簡稱。
 - 3. 設有開放式廚房的住宅單位內所顯示的虛線代表開放式廚房範圍。
開放式廚房範圍
 - 4. 固定式窗戶連維修窗（不作通風用途）中的維修窗戶只能在作維修時開啟。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE
期數的住宅物業的樓面平面圖

Tower 1 (Tower 1A & Tower 1B) 15/F-23/F, 25/F-33/F, 35/F-43/F & 45/F
第1座 (第1A座及第1B座) 15樓至23樓、25樓至33樓、35樓至43樓及45樓

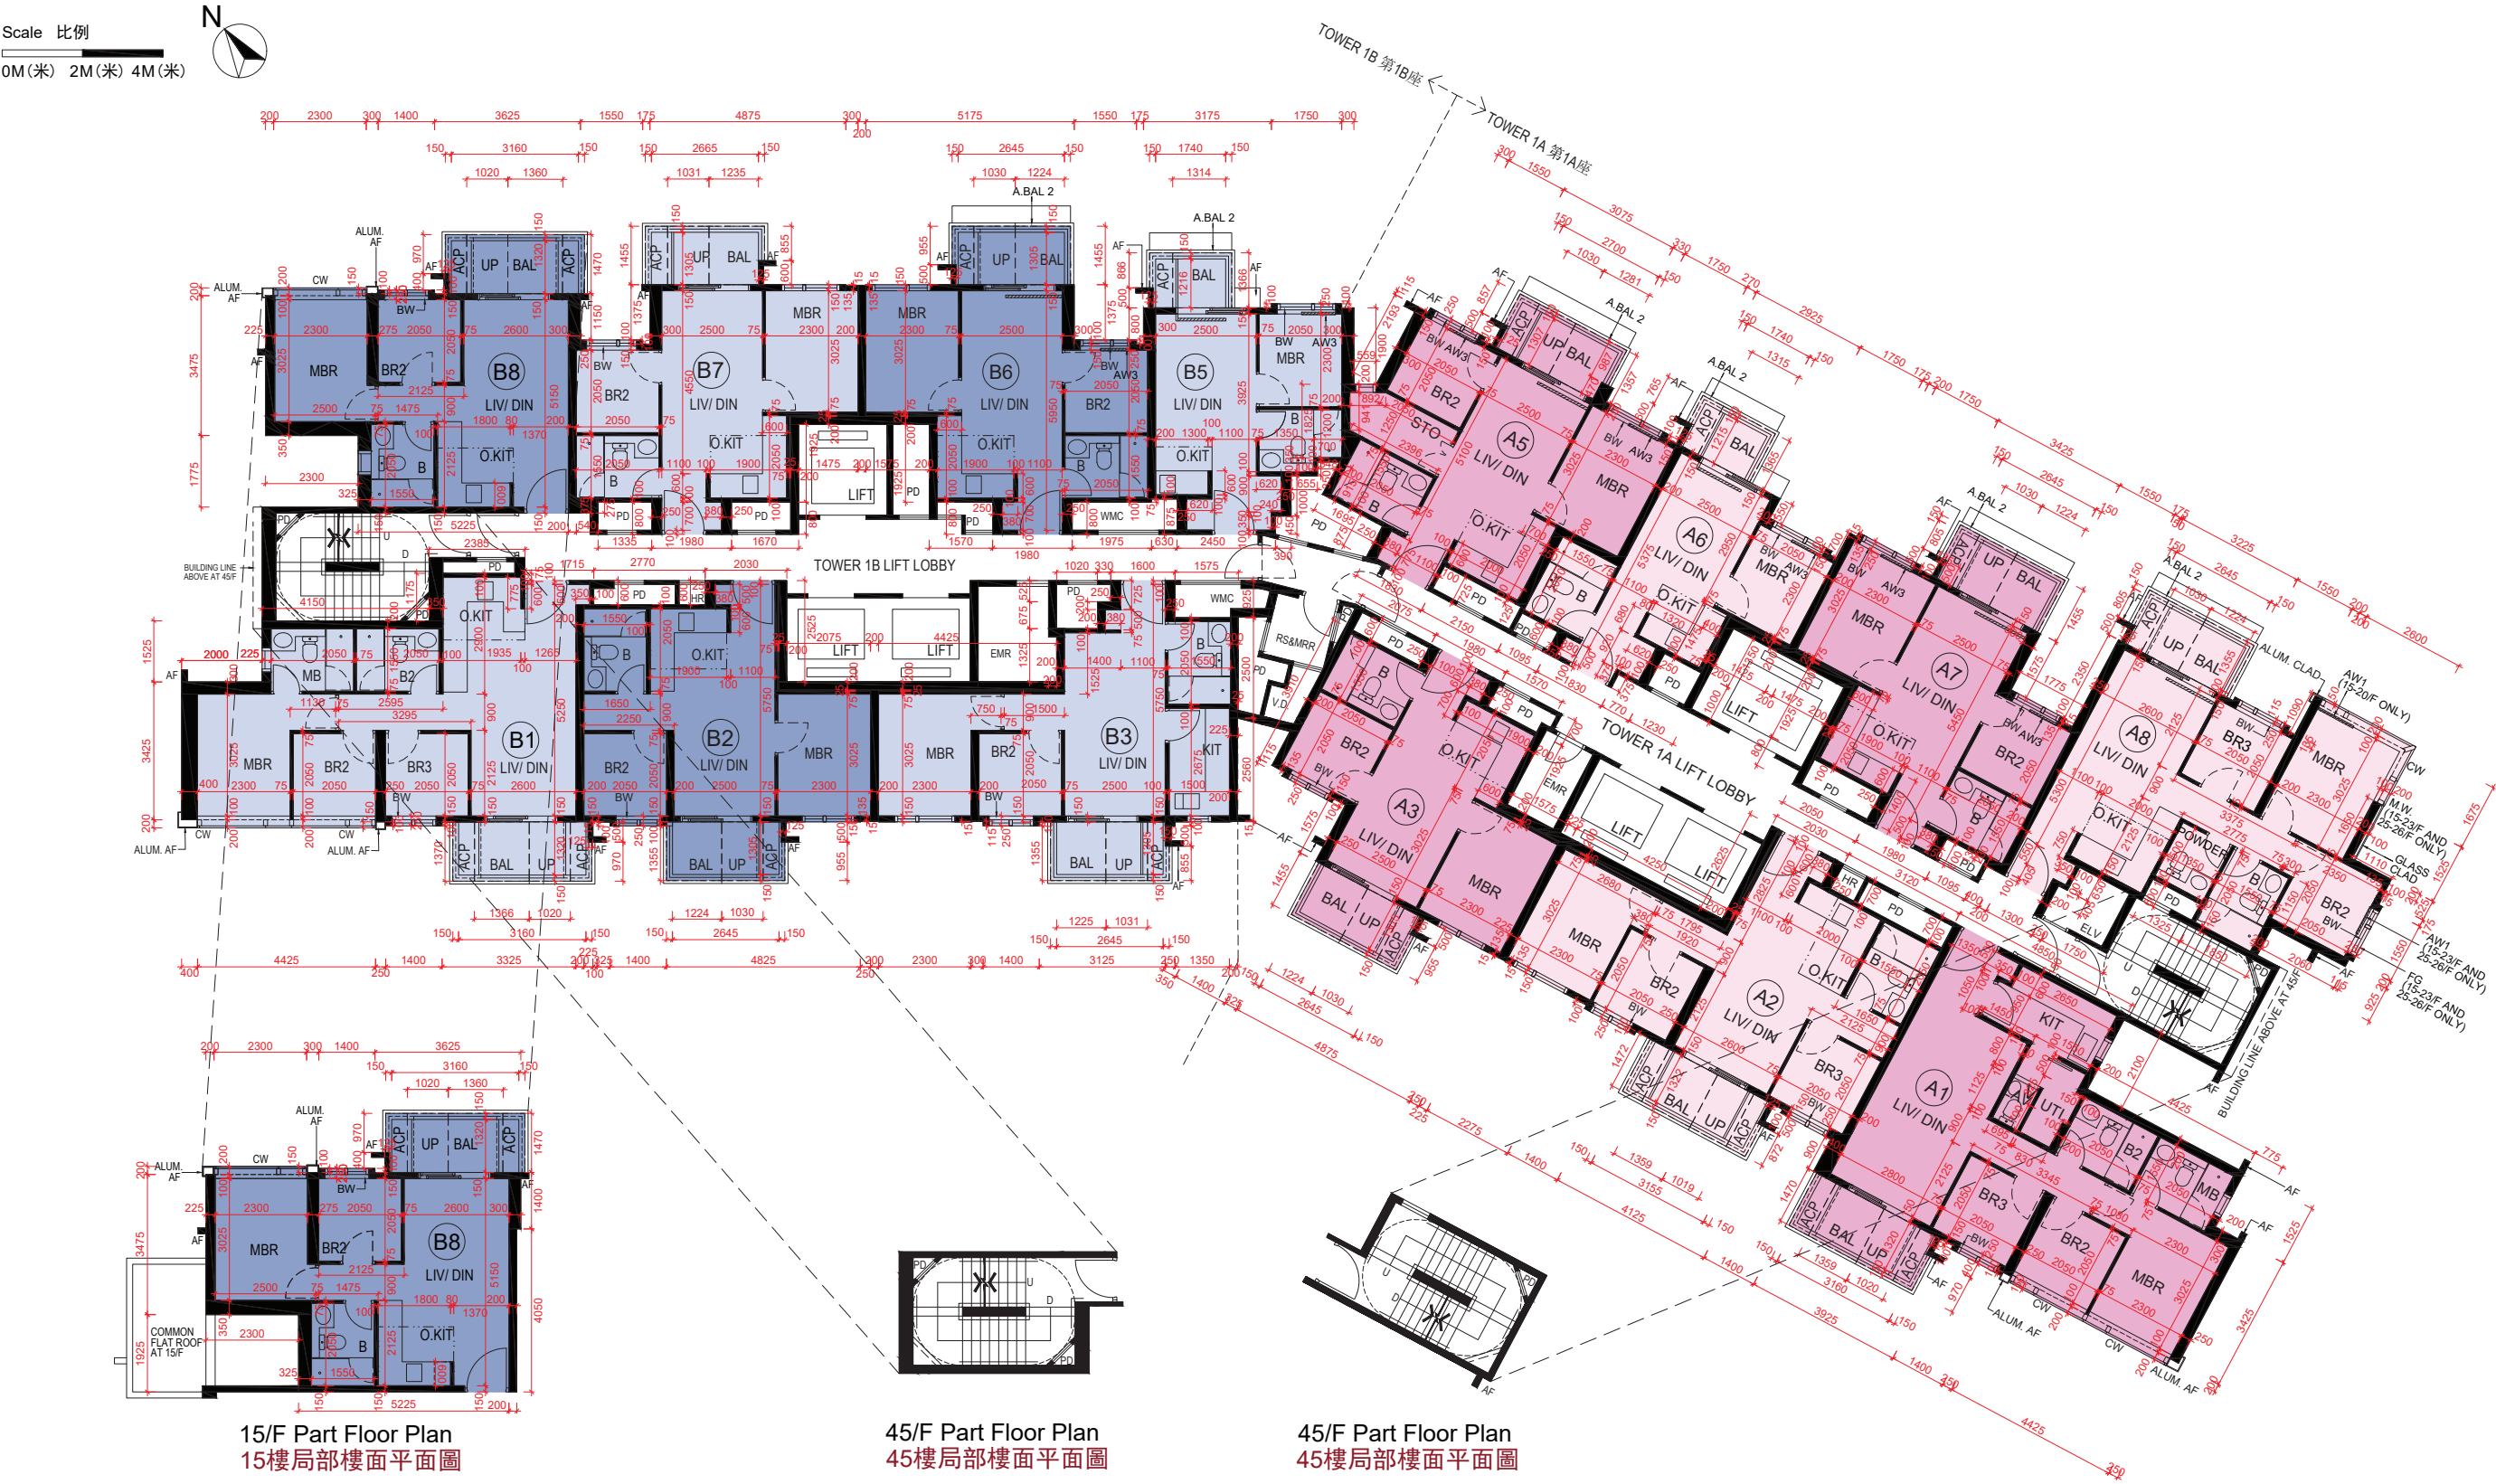

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

Block Name 大廈名稱	Floor 樓層	Flat 單位							
Tower 1 (Tower 1A & Tower 1B) 第1座 (第1A座及第1B座)	46/F 46樓	Floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)	Simplex 1A	Simplex 2A	A5	Simplex 1B	Simplex 2B	B5	B6
			3090	3090, 3490	3090	3090, 3490	3090, 3490	3090	3090
		The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板的厚度 (不包括灰泥) (毫米)	200	200	200	200	200	200	200

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (This does not apply to the residential properties in the Phase because the design of the Phase does not involve reducing thickness of structural walls of residential properties on the upper floor and hence internal areas of those residential properties will not be increased.)

因住宅物業的較高的樓層結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用於期數的住宅物業，因期數的設計是不牽涉較高樓層的住宅物業的結構牆的厚度遞減。因此，該等住宅物業的內部面積不會增加。）

- Notes:
- The dimensions of floor plan are all structural dimensions in millimetre.
 - Please refer to Page AL001 - AL002 of this sales brochure for remarks and legend of the terms and abbreviations shown on this floor plan.
 - Dotted line in a residential unit with open kitchen delineates the extent of open kitchen area.
 Extent of Open Kitchen Area
 - Maintenance windows at fixed glazing with maintenance window (not for ventilation purpose) are openable for maintenances only.

- 備註:
- 樓面平面圖所列之尺寸數字以毫米標示之建築結構尺寸。
 - 請參閱本售樓說明書第AL001-AL002頁之附註及圖例以協助解讀此部份的平面圖及其顯示之名詞及簡稱。
 - 設有開放式廚房的住宅單位內所顯示的虛線代表開放式廚房範圍。
 開放式廚房範圍
 - 固定式窗戶連維修窗（不作通風用途）中的維修窗戶只能在作維修時開啟。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE PHASE

期數的住宅物業的樓面平面圖

Tower 1 (Tower 1A & Tower 1B) 46/F

第1座 (第1A座及第1B座) 46樓

