

平面圖圖例 Legend For Floor Plan

AHU. RM. = Air Handling Unit Room = 送風櫃房	INACCESSIBLE FLAT ROOF = 無法進入的平台
ALUMINIUM GRILLE = 鋁裝飾	INACCESSIBLE OPEN FLAT ROOF = 無法進入的露天平台
A/C UNIT = Air Conditioning Unit = 空調機	JACUZZI = 按摩池
A.D. = Air Duct = 氣槽	KIT. = Kitchen = 廚房
A.F. = Architectural Feature = 建築裝飾	LAV. = Lavatory = 洗手間
BAL. = Balcony = 露台	LIFT = 升降機
BAL. ABOVE = Balcony Above = 露台置上	LIFT LOBBY = 升降機大堂
BATH = Bathroom = 浴室	LIFT OVERRUN = 升降機槽
BED RM. = Bedroom = 睡房	LIFT SHAFT = 升降機通風井
BUILDING LINE ABOVE = 建築物外線置上	LIGHT WEIGHT / LIGHTWEIGHT CONCRETE BACKFILL = 輕質混凝土填充
BUILDING LINE = 建築物外線	LIVING = Living Room = 客廳
CANOPY = 簷篷	M. BATH = Master Bathroom = 主人浴室
CAT LADDER W/. SAFETY CAGE = Cat Ladder With Safety Cage = 維修爬梯及安全籠	M. BED RM. = Master Bedroom = 主人睡房
CAT LADDER = 維修爬梯	METAL A.F. = Metal Architectural Feature = 金屬建築裝飾
COVERED CHANNEL = 有蓋渠道	METAL GRILLE = 金屬裝飾
CORRIDOR = 走廊	M.L. AT H/L = Metal Louver At High Level = 金屬柵置上
C.W. ABOVE = Curtain Wall Above = 幕牆置上	OPEN FLAT ROOF = 露天平台
DUPLEX = 複式單位	OPEN ROOF = 天台
DINING = Dining Room = 飯廳	P.D. = Pipe Duct = 管道槽
DIS. LIFT = Lift for Person with Disabilities = 傷健人士升降機	PENTHOUSE = 頂層單位
DN = Down = 落	PLANTER = 花槽
DOG HOUSE = 室外管道房	PLANTER BELOW = 花槽置下
E.A.D. = Exhaust Air Duct = 排氣管	POWDER RM. = Powder Room = 化妝間
ELECT. RM. = Electrical Room = 電機房	PRIVATE LIFT LOBBY = 私人升降機大堂
ELECT. DUCT = Electrical Duct = 電線槽	R.S. & M.R. RM. = Refuse Storage and Material Recovery Room = 垃圾及物料回收室
ELV. = Extra Low Voltage Electrical Duct = 特低壓電線槽	STORE = Store Room = 儲物室
E.M.C. = Electrical Meter Cabinet = 電錶櫃	SWIMMING POOL = 泳池
ENTRANCE LOBBY = 入口大堂	S.L. = Smoke Lobby (Protected Lobby) = 防煙間
FILTRATION PLANT PIT BELOW = 濾水機井置下	TOP ROOF (INACCESSIBLE) = 頂層天台（無法進入）
FOYER = 門廳	UP = 上
F.S. INLET = Fire Services Inlet = 消防入水掣	VERTICAL GREENING = 垂直綠化
F.S. PUMP RM. = Fire Services Pump Room = 消防水泵房	VOID = 中空
GARDEN = 花園	WALK-IN CLOSET = 衣帽間
GAS HEATER = 煤氣爐	W.M.C. = Water Meter Cabinet = 水錶櫃
H.R. = Hose Reel = 消防喉轆	W.P. = Water Point = 來水位
H.R. AT H/L = Hose Reel At High Level = 消防喉轆置上	
H.R. AT L/L = Hose Reel At Low Level = 消防喉轆置下	

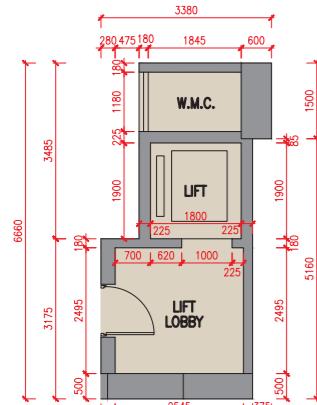
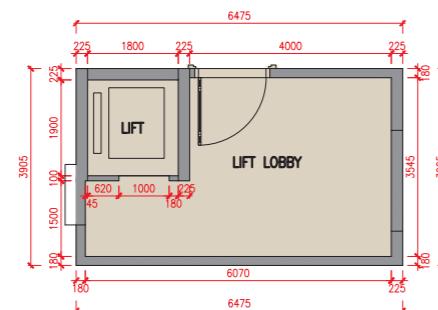
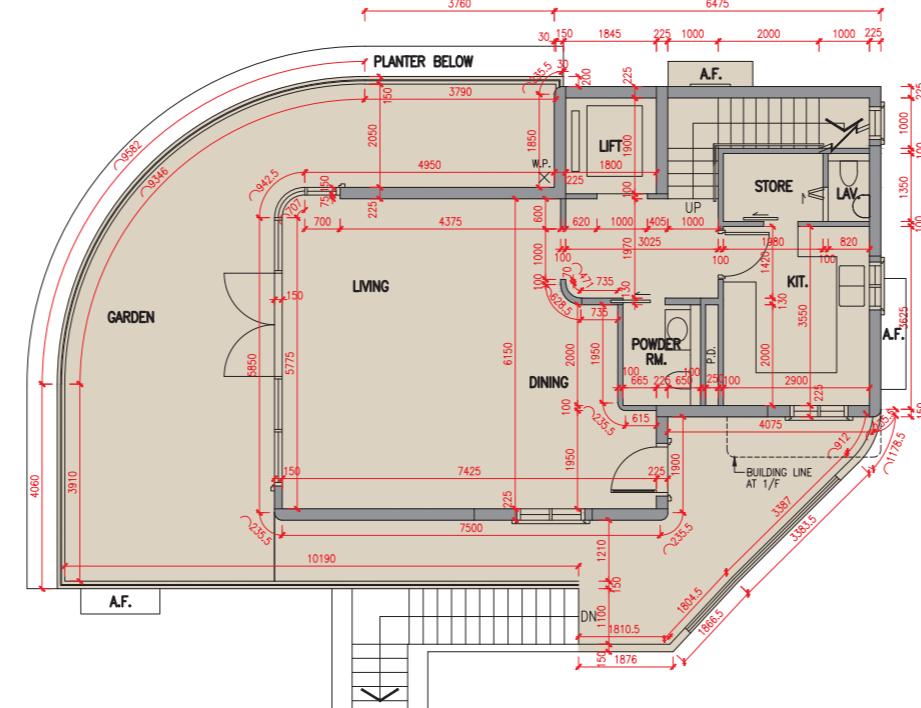
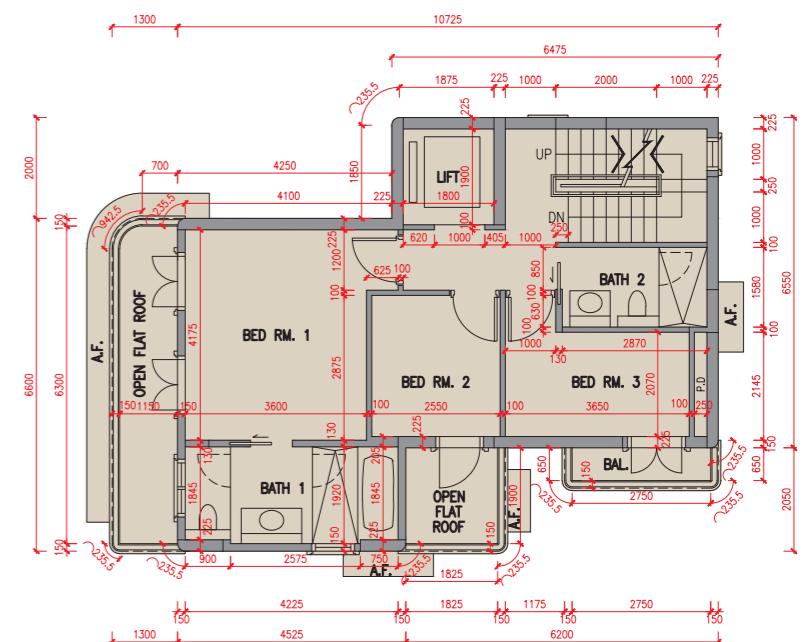
適用於本節各樓面平面圖之備註：

1. 部份樓層外牆範圍設有建築裝飾。詳細資料請參考最新經批准的建築圖則。
2. 部份住宅單位的露台及/或平台及/或外牆處或附近設有外露之公用喉管。
3. 部份住宅單位客廳、飯廳、睡房、走廊、浴室、化妝間、儲物室、洗手間及廚房天花有跌級樓板及/或假天花用以裝置冷氣系統及/或其他機電設備。部份儲物室及洗手間內設有冷氣及/或機電設備之外露喉管/管道。
4. 露台為不可封閉的地方。
5. 樓面平面圖上所顯示的裝置符號，如浴缸、洗滌盆、座廁、花灑、洗滌盆櫃等乃按最新的經批准的建築圖則繪製，只作一般示意用途。

Remarks applicable to the floor plans of this section :

1. There may be architectural features on external walls of some of the floors. For details, please refer to the latest approved building plans.
2. Common pipes exposed are located at/ adjacent to balcony and/ or flat roof and/ or external wall of some residential units.
3. There are sunken slabs and/ or ceiling bulkheads at living rooms, dining rooms, bedrooms, corridors, bathrooms, powder rooms, store rooms, lavatories and kitchens of some residential units for the air-conditioning system and/ or mechanical & electrical services. There are exposed pipes/ ductings for air-conditioning system and/ or mechanical & electrical services within some store rooms and lavatories.
4. Balconies are non-enclosed areas.
5. Symbols of fittings and fitments such as bath tub, sink, water closet, shower, sink counter, etc. are prepared based on the latest approved building plans and are for general indication only.

1號洋房 House 1

地庫平面圖
B/F Plan地下低層平面圖
LG/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan比例 0米/M
Scale

5米/M

樓層 Floor	地庫 B/F	地下低層 LG/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	5000	5350	4000	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200	200	150, 300	150, 200	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 1號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

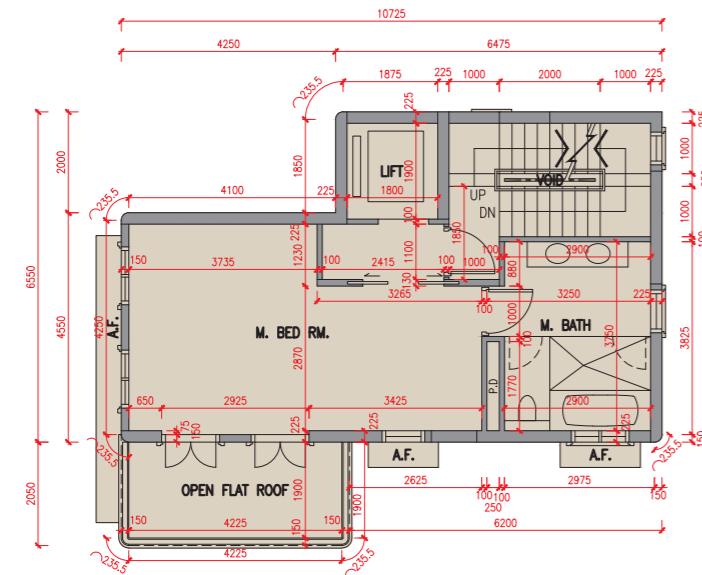
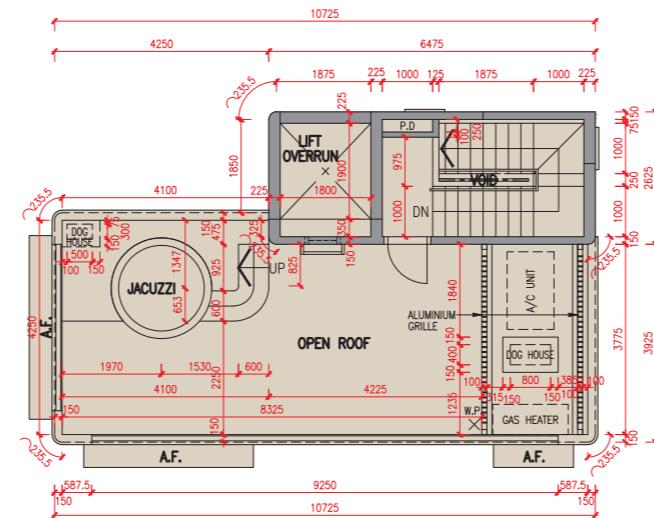
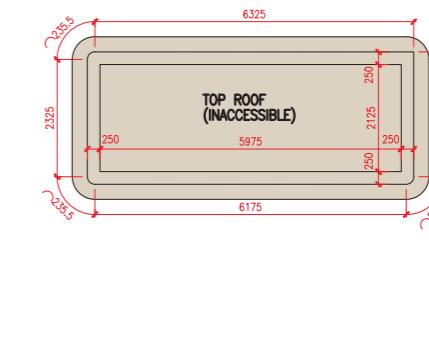
20

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 1 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

1號洋房 House 1

2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

樓層 Floor	地庫 B/F	地下低層 LG/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	5000	5350	4000	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200	200	150, 300	150, 200	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

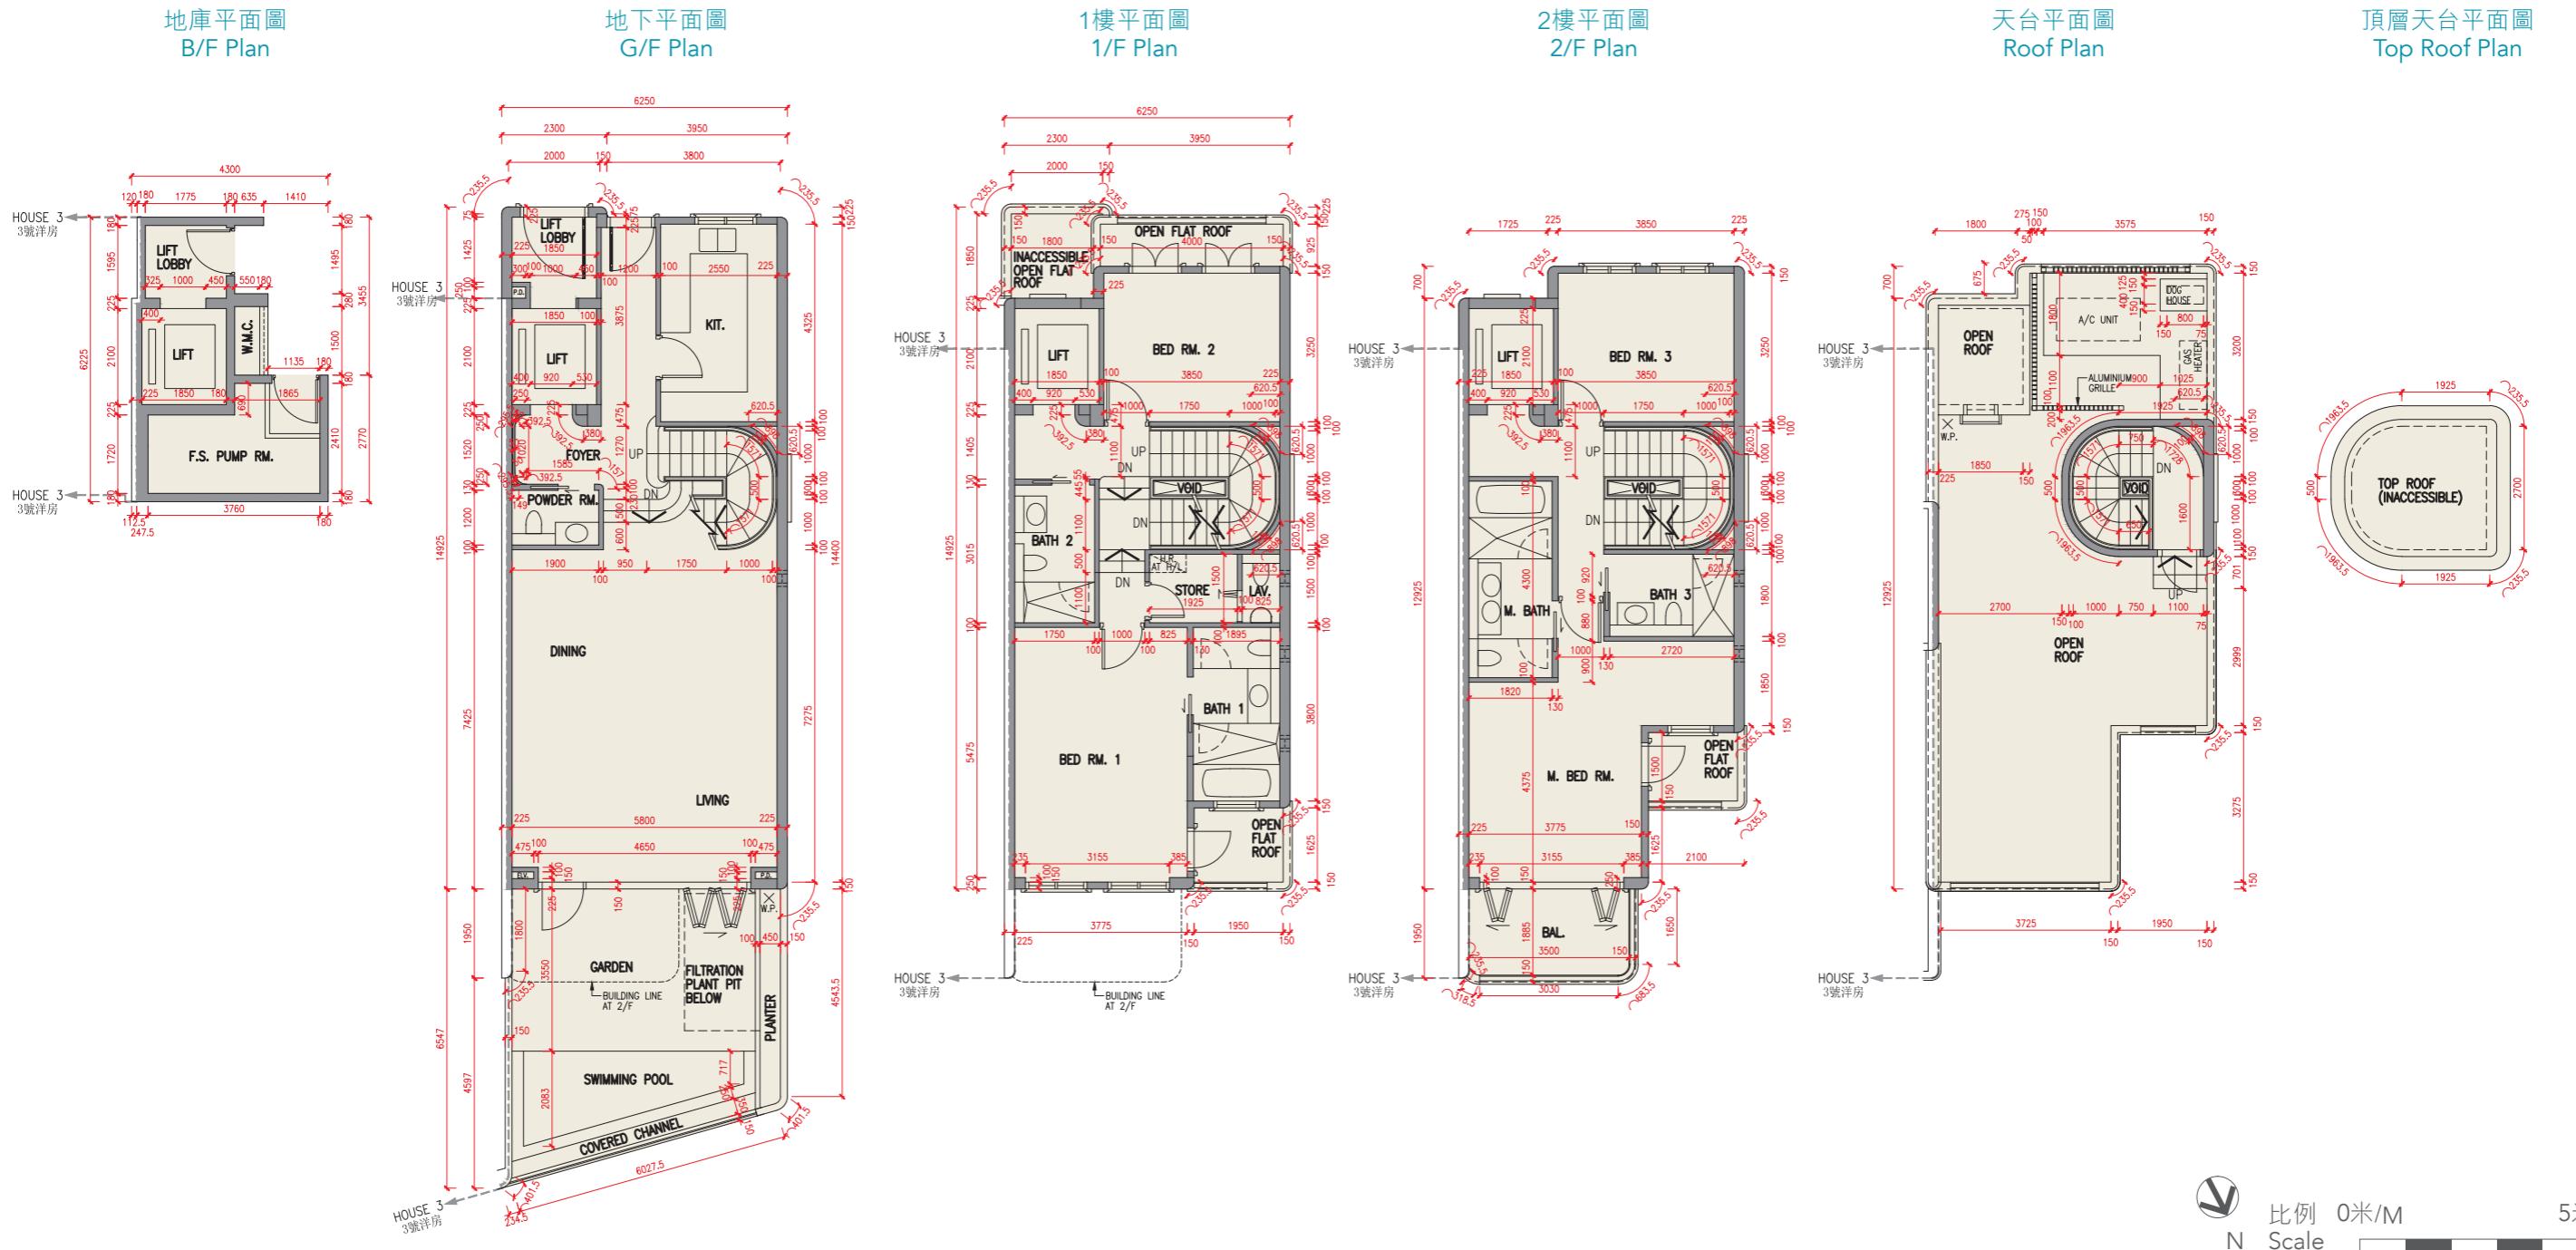
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 1號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 1 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

2號洋房 House 2



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	9750, 10250	4000, 4500	3500	3500	2300	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150, 175, 300	150	175	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

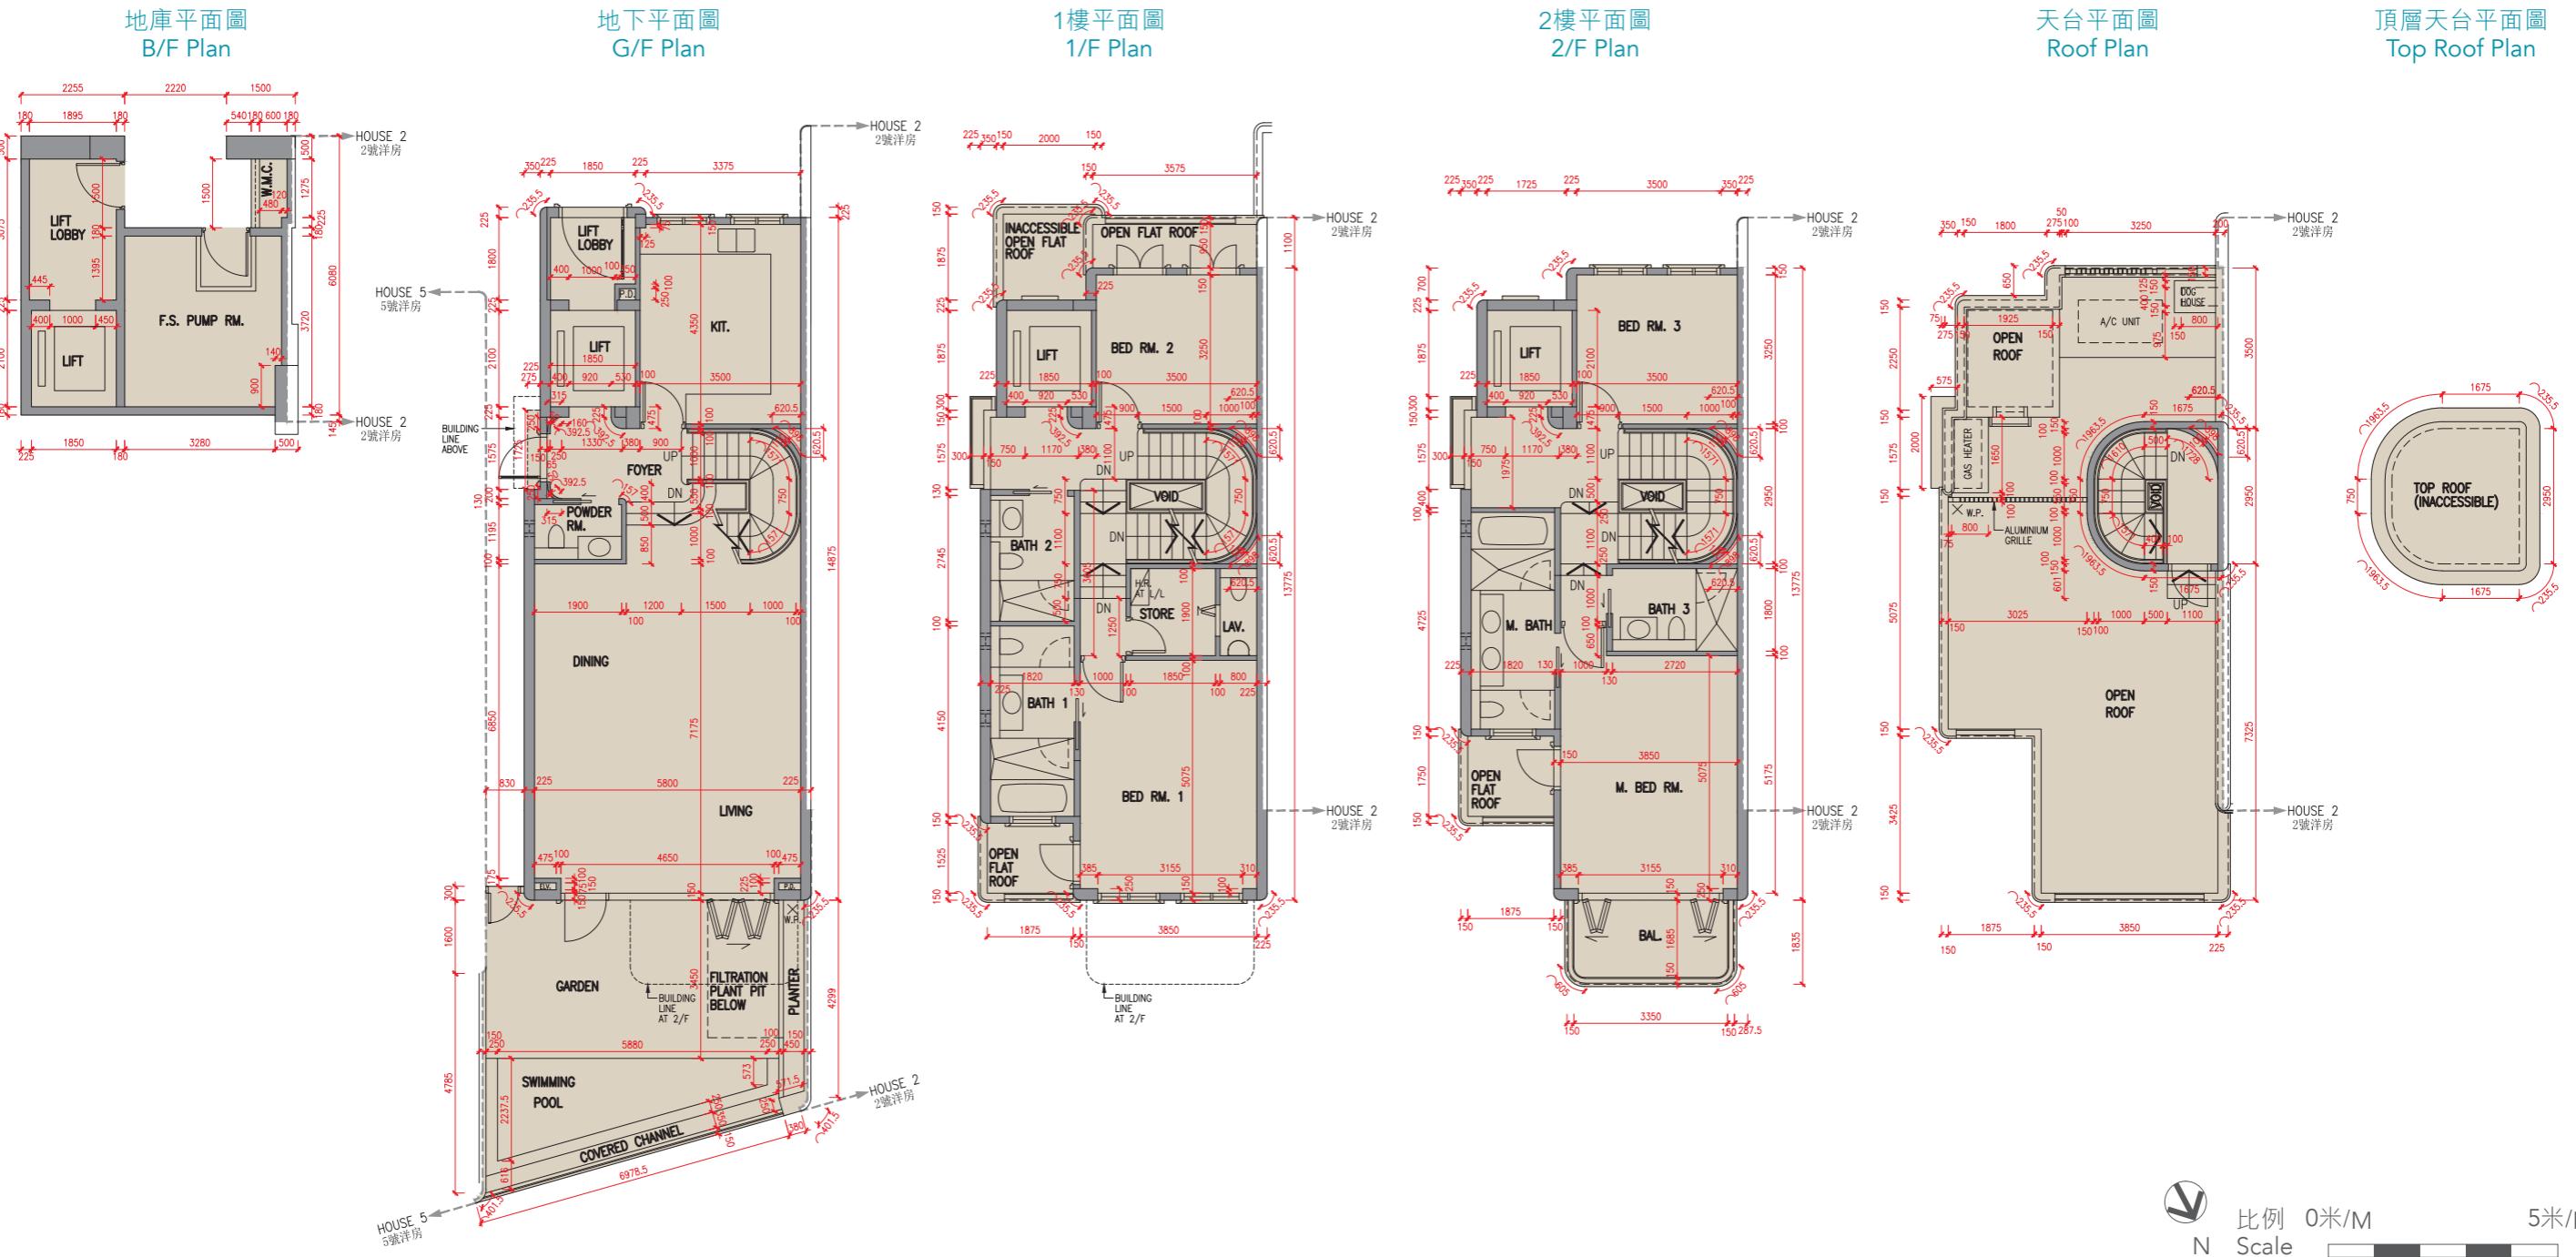
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 2號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 2 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

3號洋房 House 3



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	9250, 9750	4000, 4500	3500	3500	2300	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200, 250	150, 175, 300	150	175	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

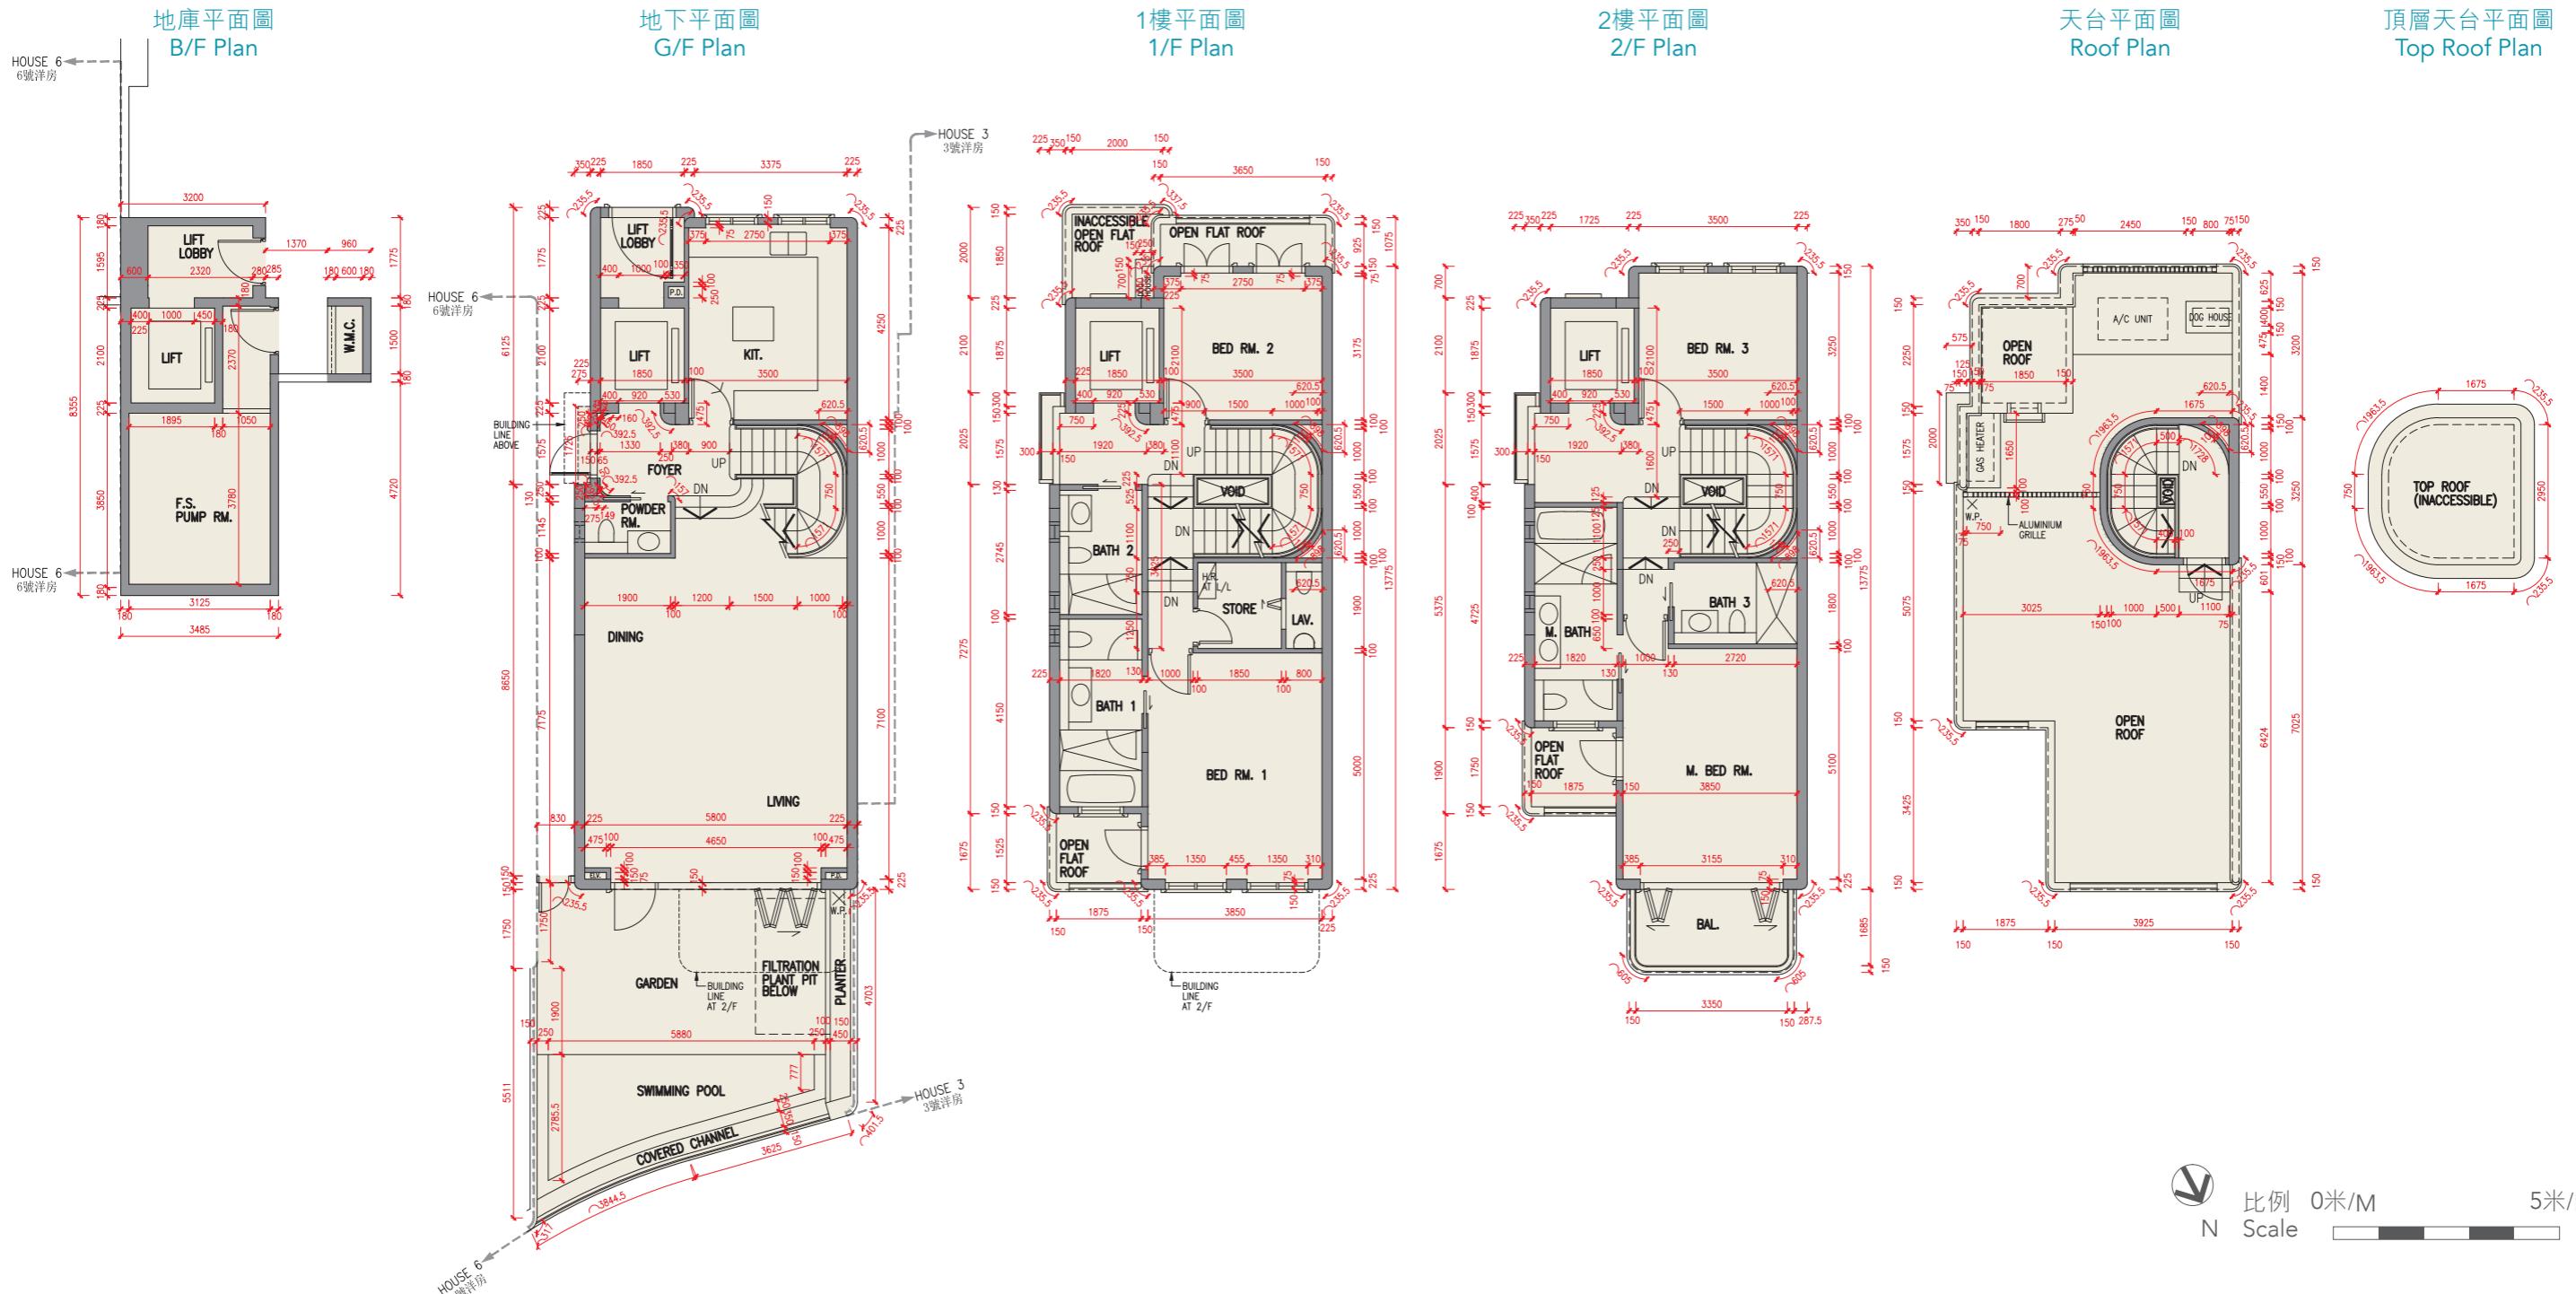
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 3號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 3 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

5號洋房 House 5



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8750, 9250	4000, 4500	3500	3500	2300	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200, 250	150, 300	150, 200	200	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

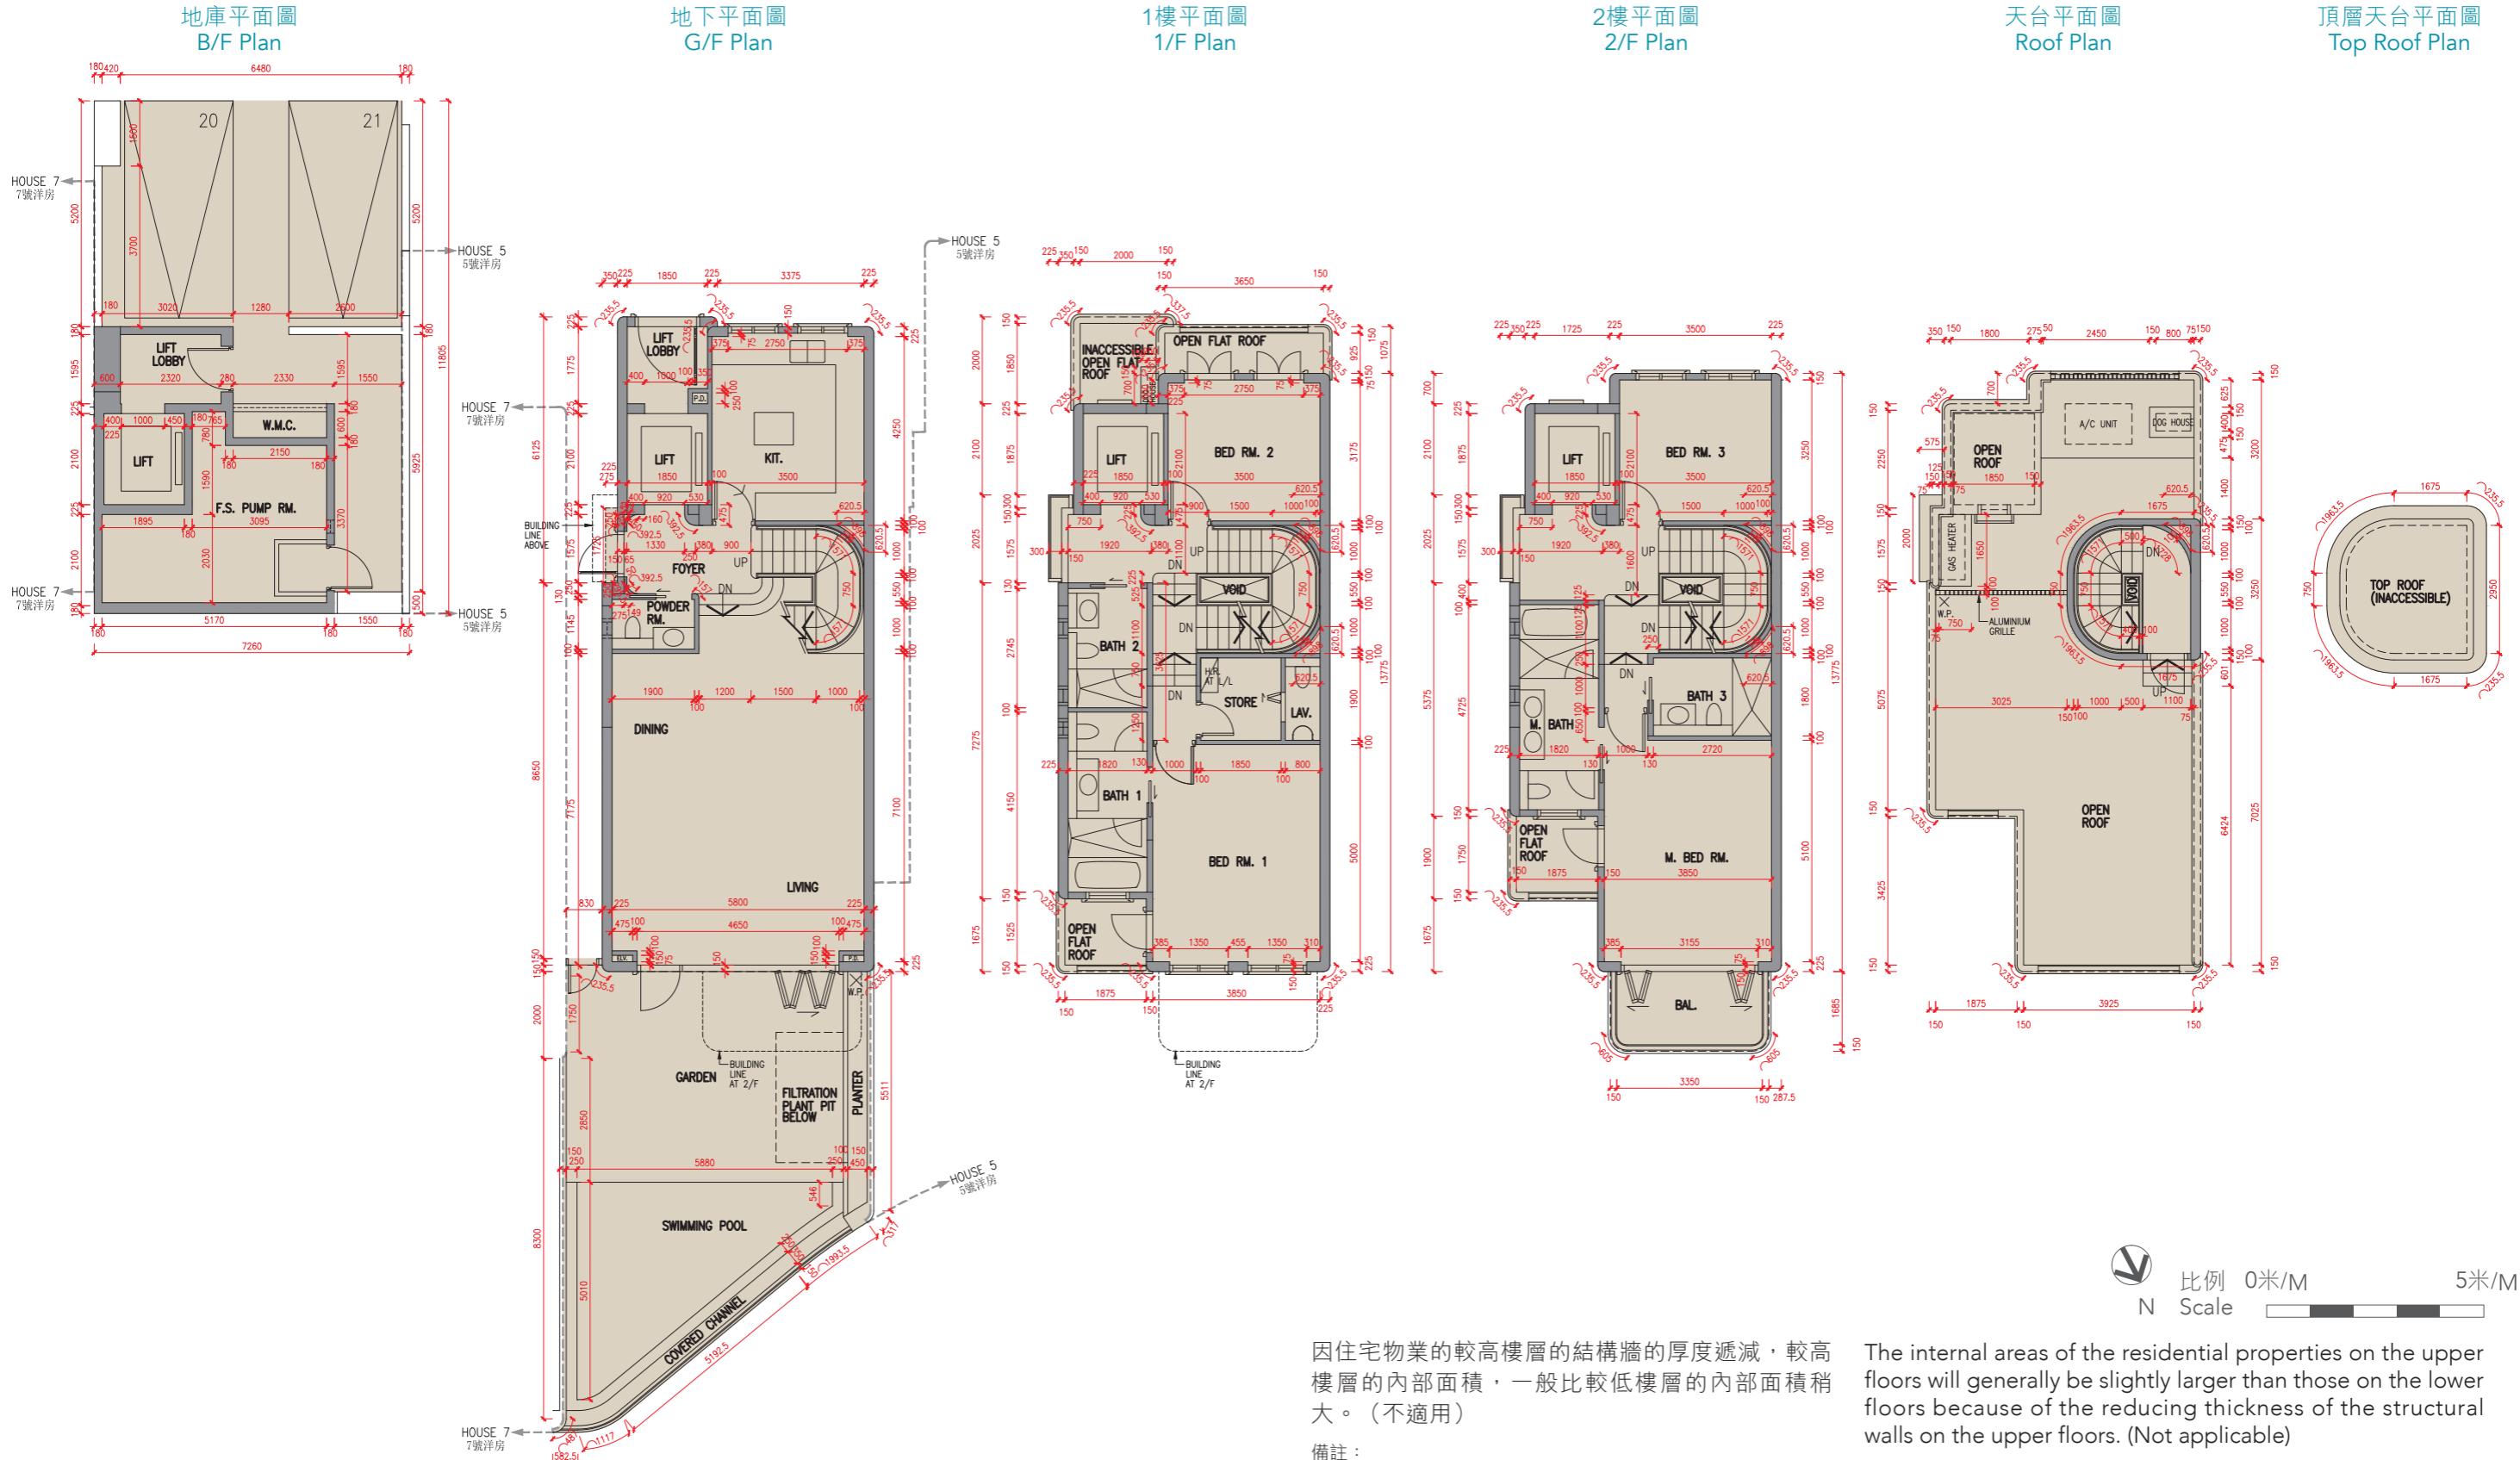
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 5號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 5 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

6號洋房 House 6



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8750, 9250	4000, 4500	3500	3500	2300	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200, 250	150, 300	150, 200	200	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 6號洋房的空調機室外機安裝於此洋房天台上。
- 批地文件指明每個用作停放車輛地方的面積為12.5平方米。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

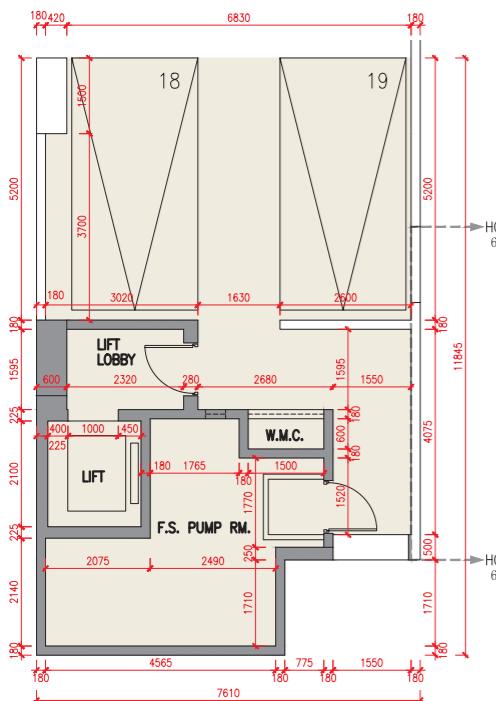
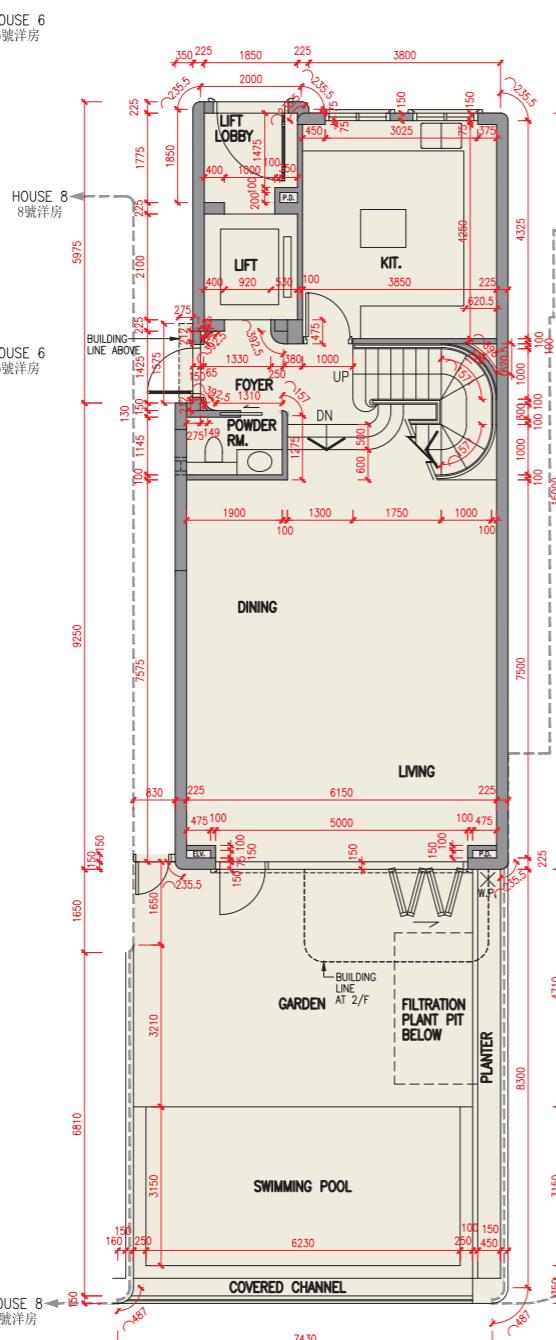
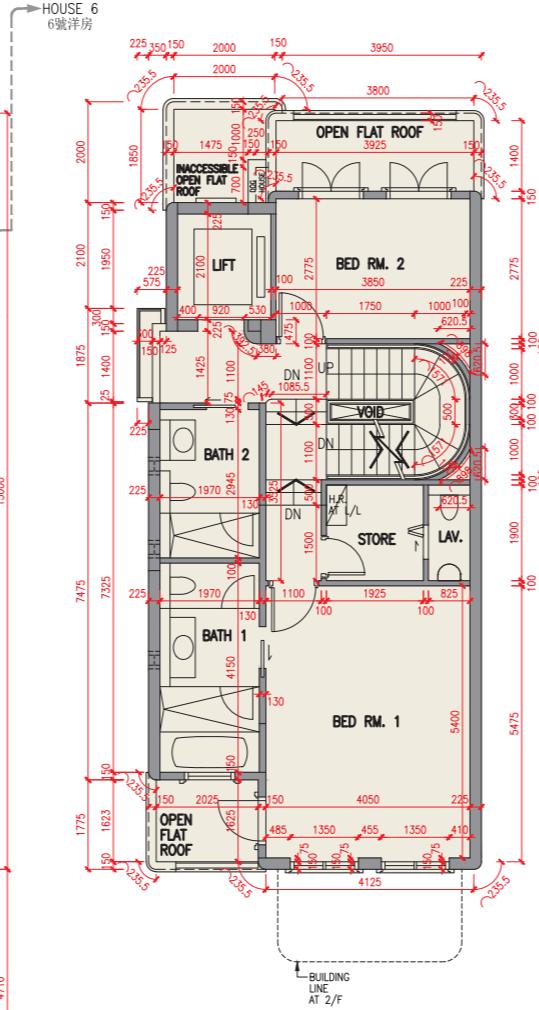
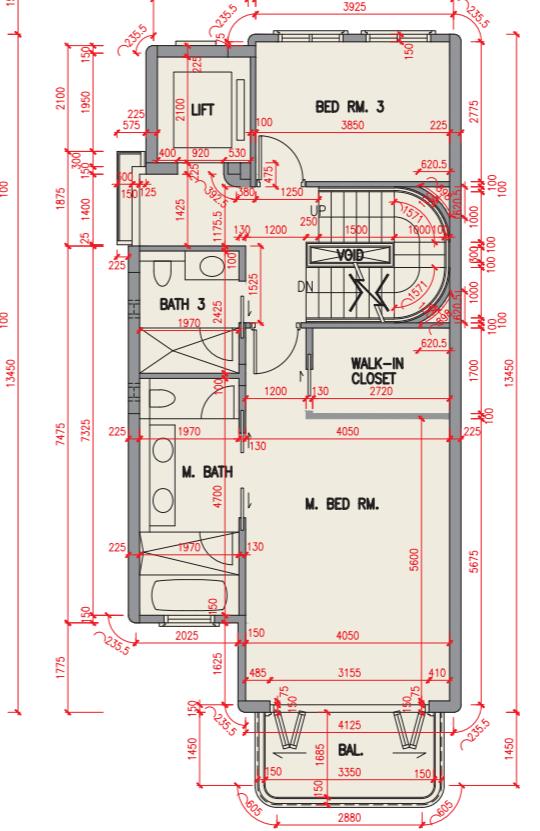
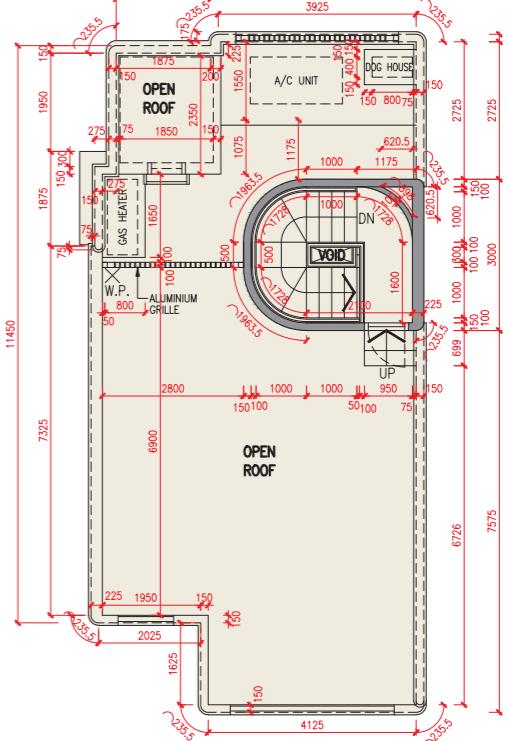

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 6 is/are located on the roof of the House.
- The area of each space which is designated under the Land Grant for parking purpose is 12.5 sq.m..
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.



7號洋房 House 7

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

1. 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. 7號洋房的空調機室外機安裝於此洋房天台上。
3. 批地文件指明每個用作停放下車輛地方的面積為12.5平方米。
4. 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
5. 每個住宅物業的樓板的厚度不包括灰泥。

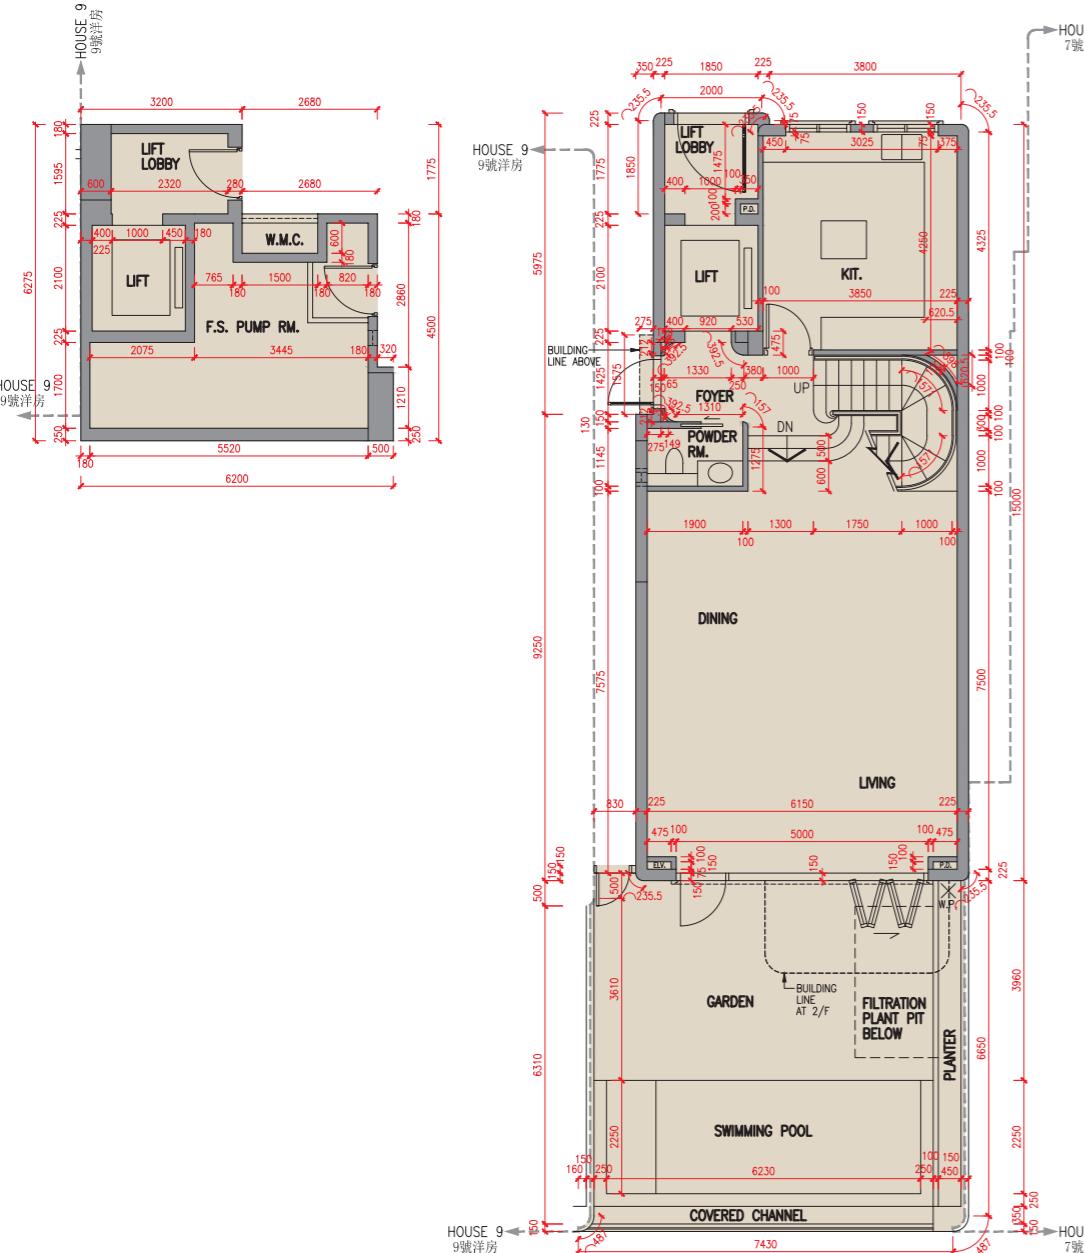
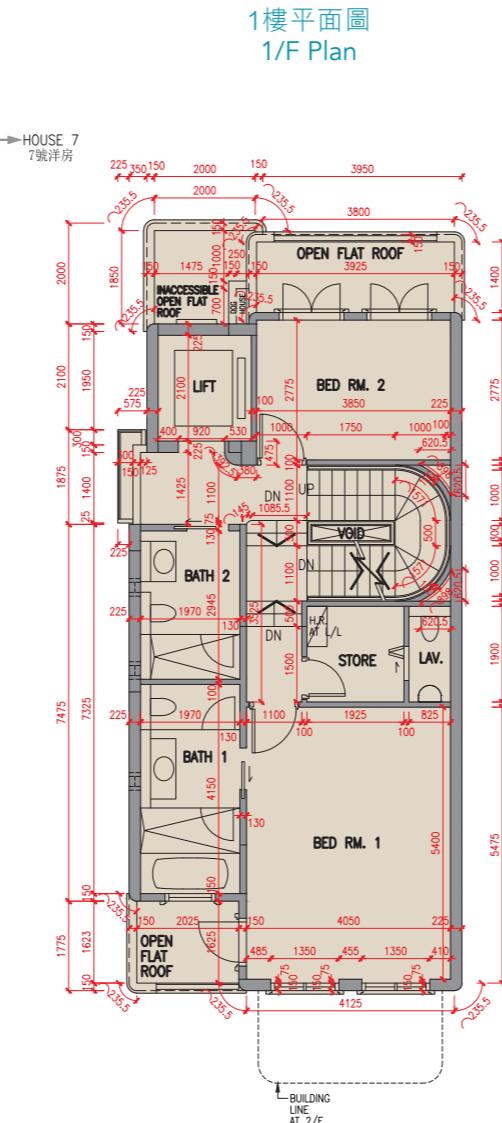
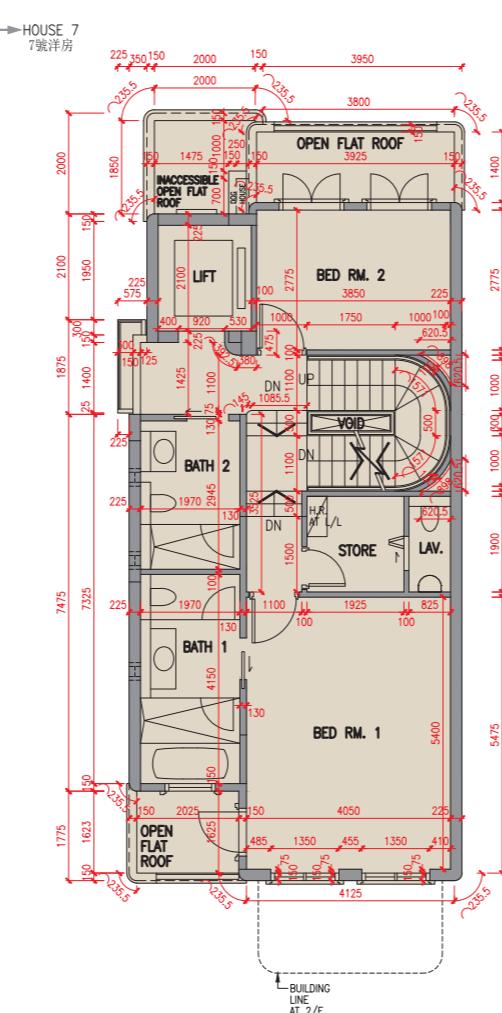
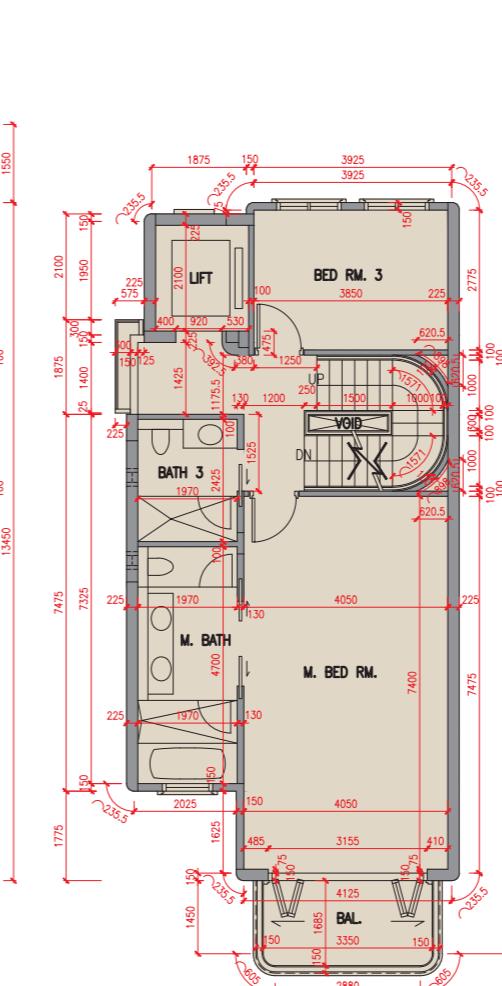
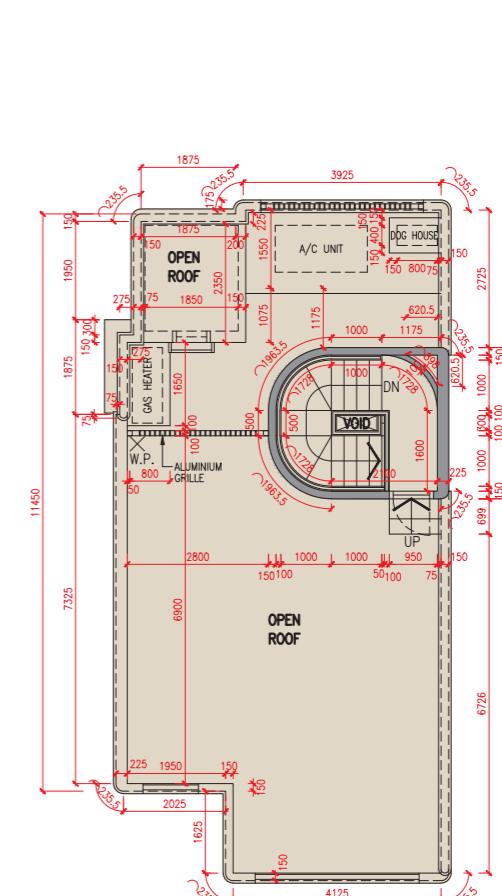
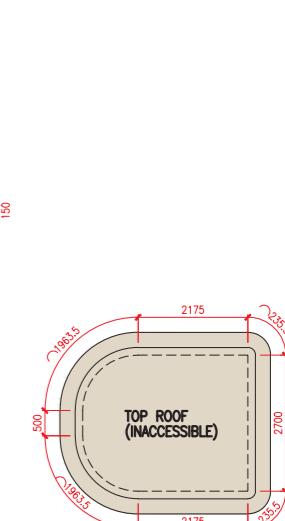
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. The air-conditioning outdoor unit(s) for House 7 is/are located on the roof of the House.
3. The area of each space which is designated under the Land Grant for parking purpose is 12.5 sq.m..
4. The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
5. The thickness of the floor slabs excludes plaster of each residential property.

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8750, 9250	4000, 4500	3500	3500	2395	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200, 250	150, 300	150, 200	200	

8號洋房 House 8

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8750, 9250	4000, 4500	3500	3500	2395	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200, 250	150, 300	150, 200	200	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

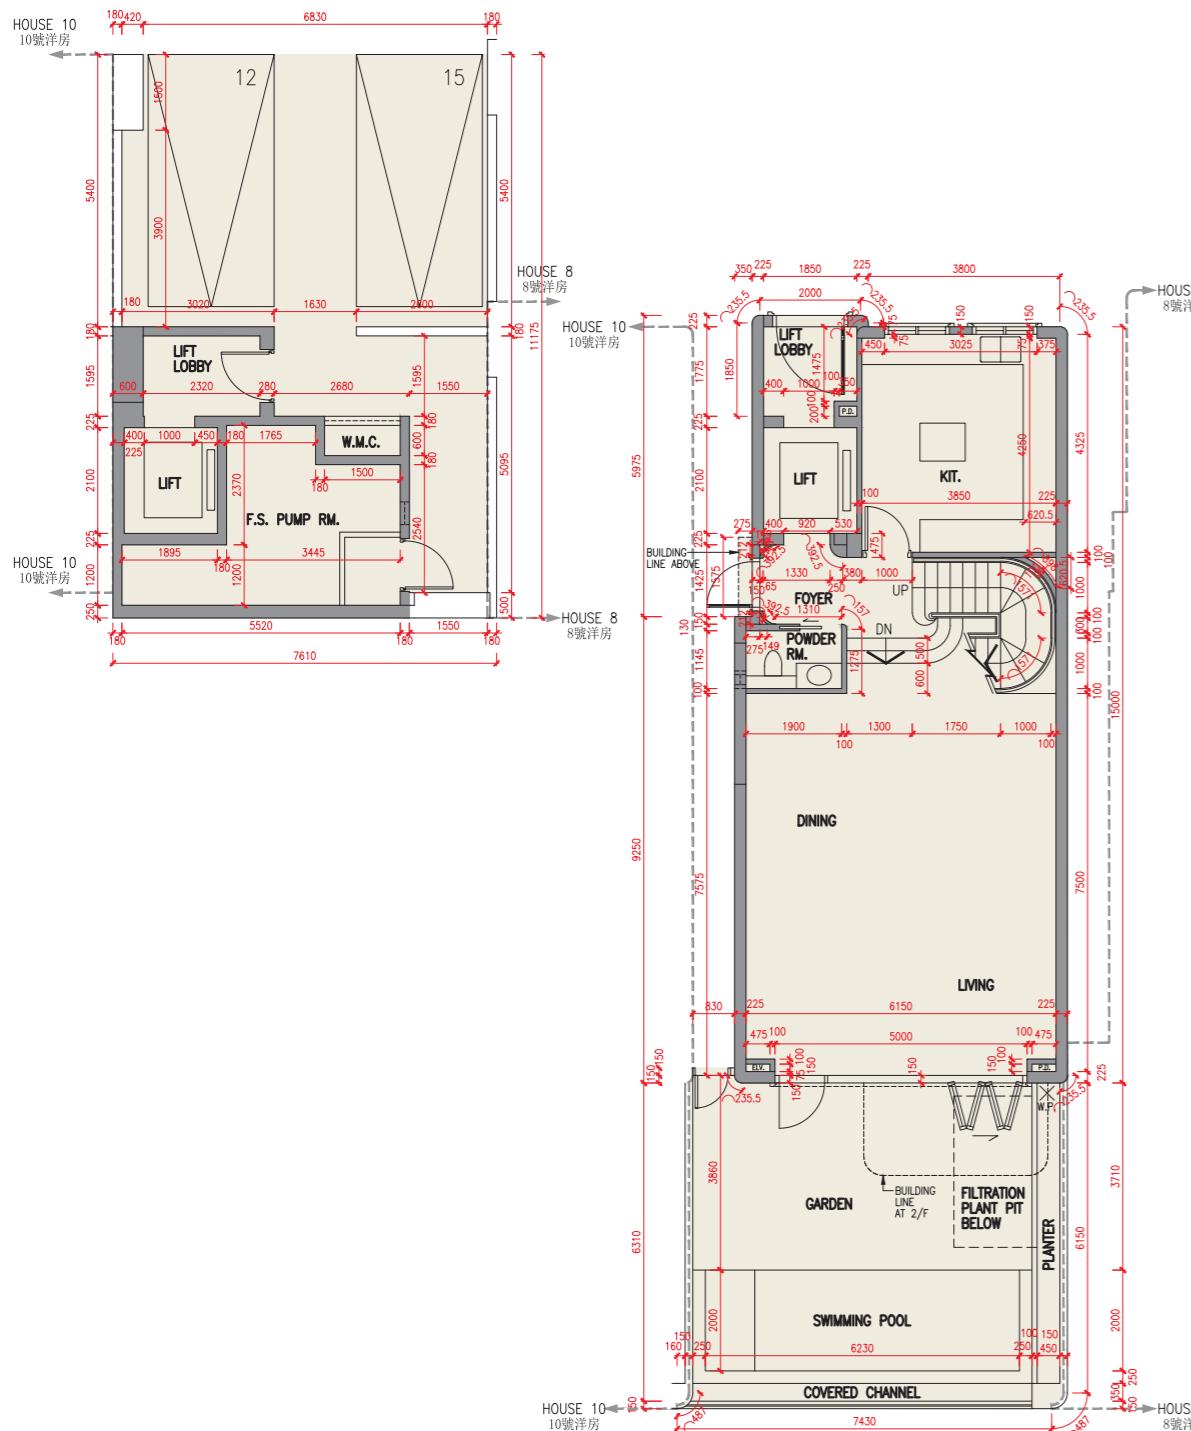
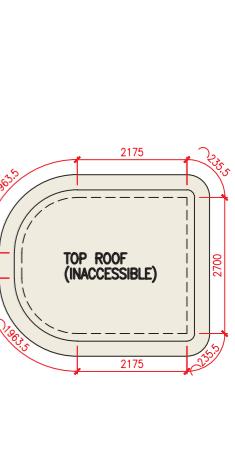
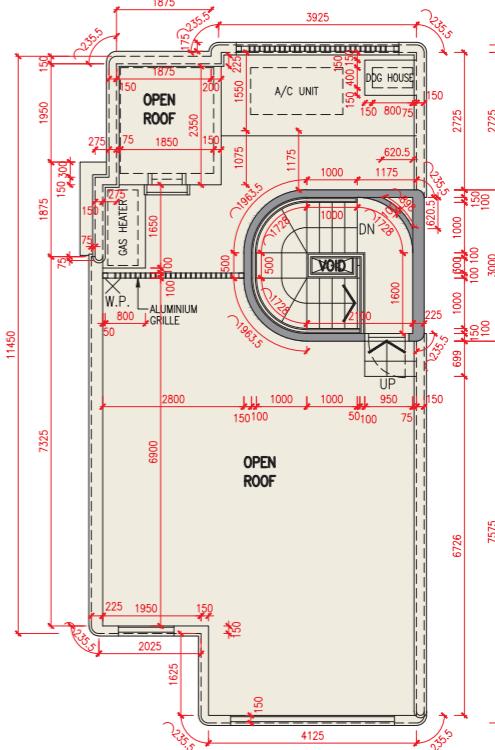
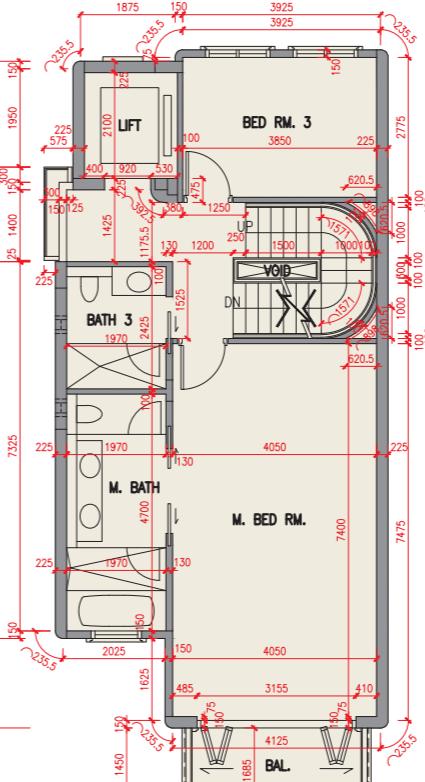
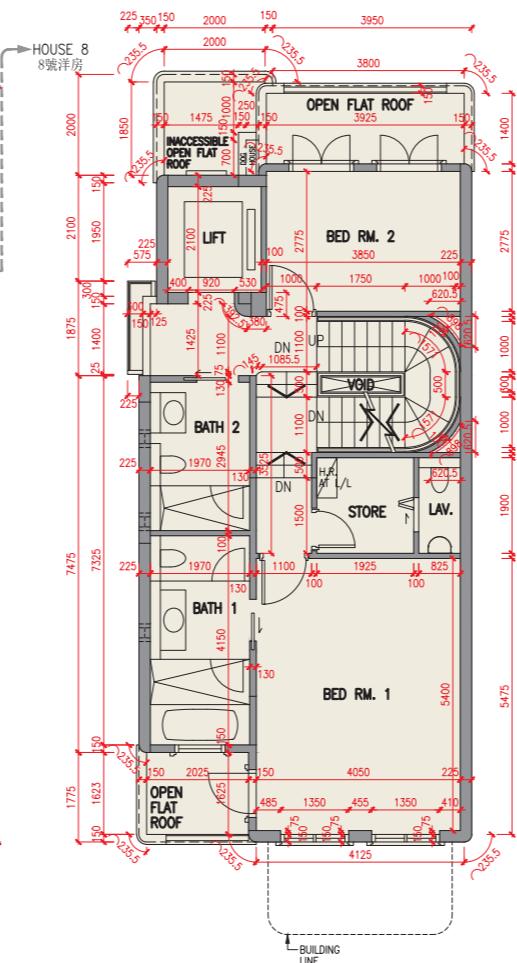
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 8號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 8 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

9號洋房 House 9

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

1. 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. 9號洋房的空調機室外機安裝於此洋房天台上。
3. 批地文件指明每個用作停放下車輛地方的面積為12.5平方米。
4. 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
5. 每個住宅物業的樓板的厚度不包括灰泥。

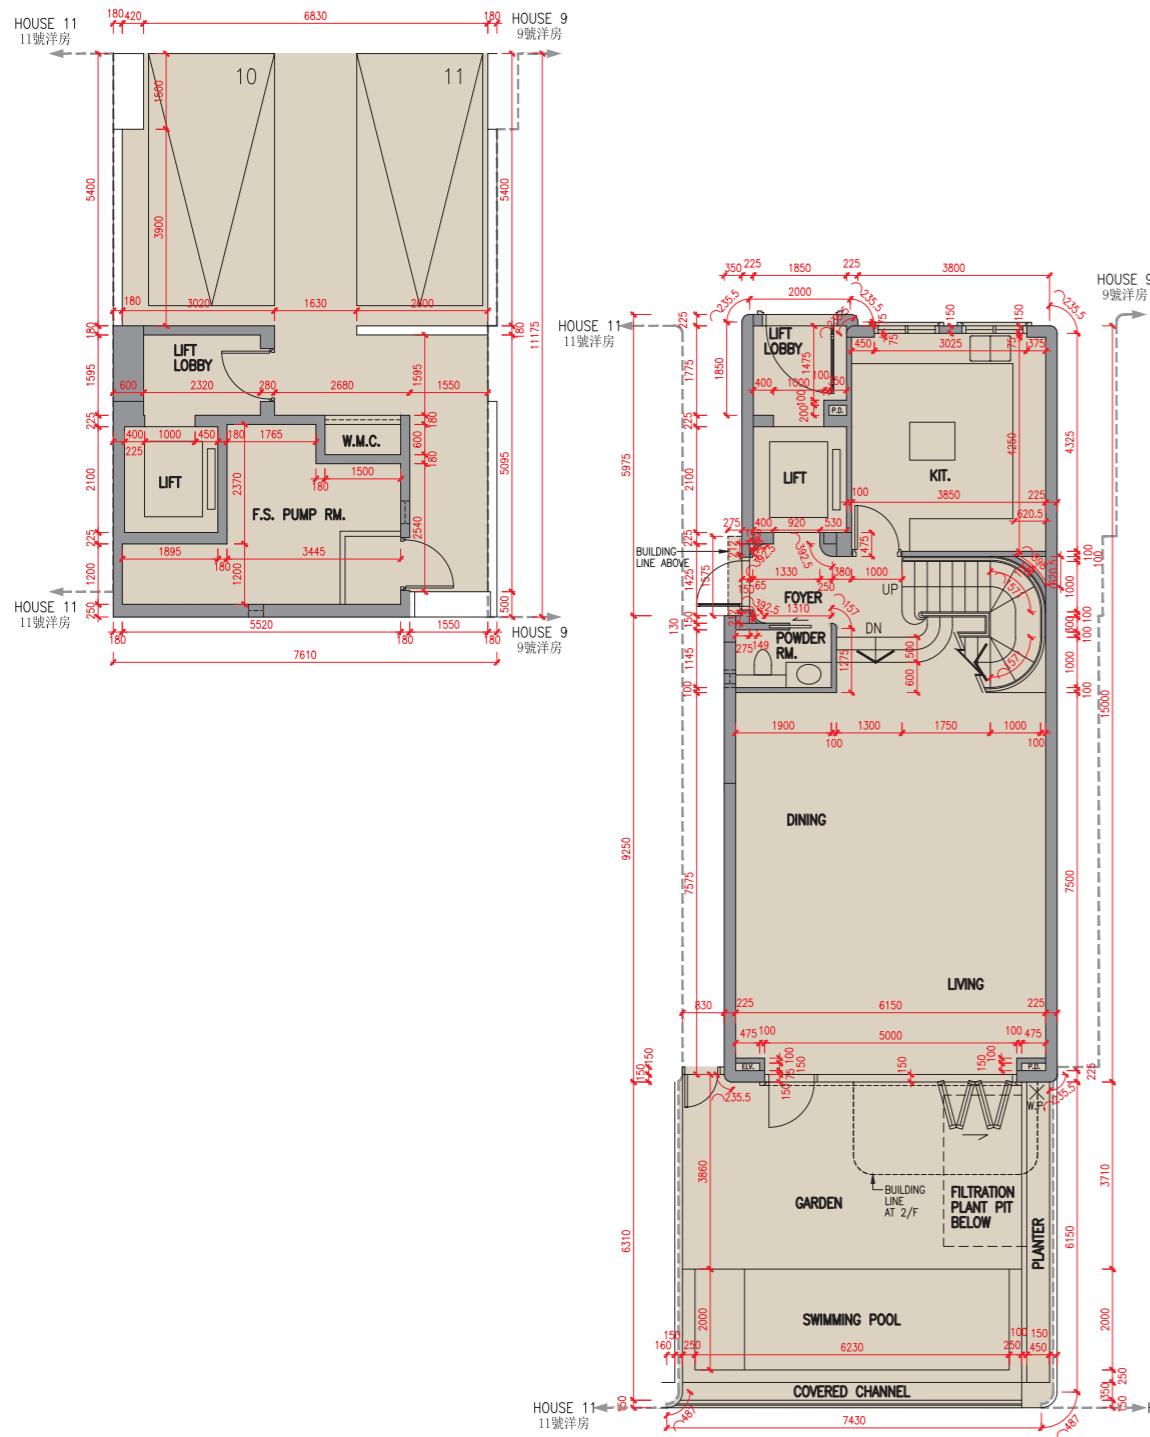
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. The air-conditioning outdoor unit(s) for House 9 is/are located on the roof of the House.
3. The area of each space which is designated under the Land Grant for parking purpose is 12.5 sq.m..
4. The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
5. The thickness of the floor slabs excludes plaster of each residential property.

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8750, 9250	4000, 4500	3500	3500	2395	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200, 250	150, 300	150, 200	200	

10號洋房 House 10

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8650, 9150	4000, 4500	3500	3500	2395	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200, 250	150, 300	150, 200	200	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 10號洋房的空調機室外機安裝於此洋房天台上。
- 批地文件指明每個用作停放下車輛地方的面積為12.5平方米。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

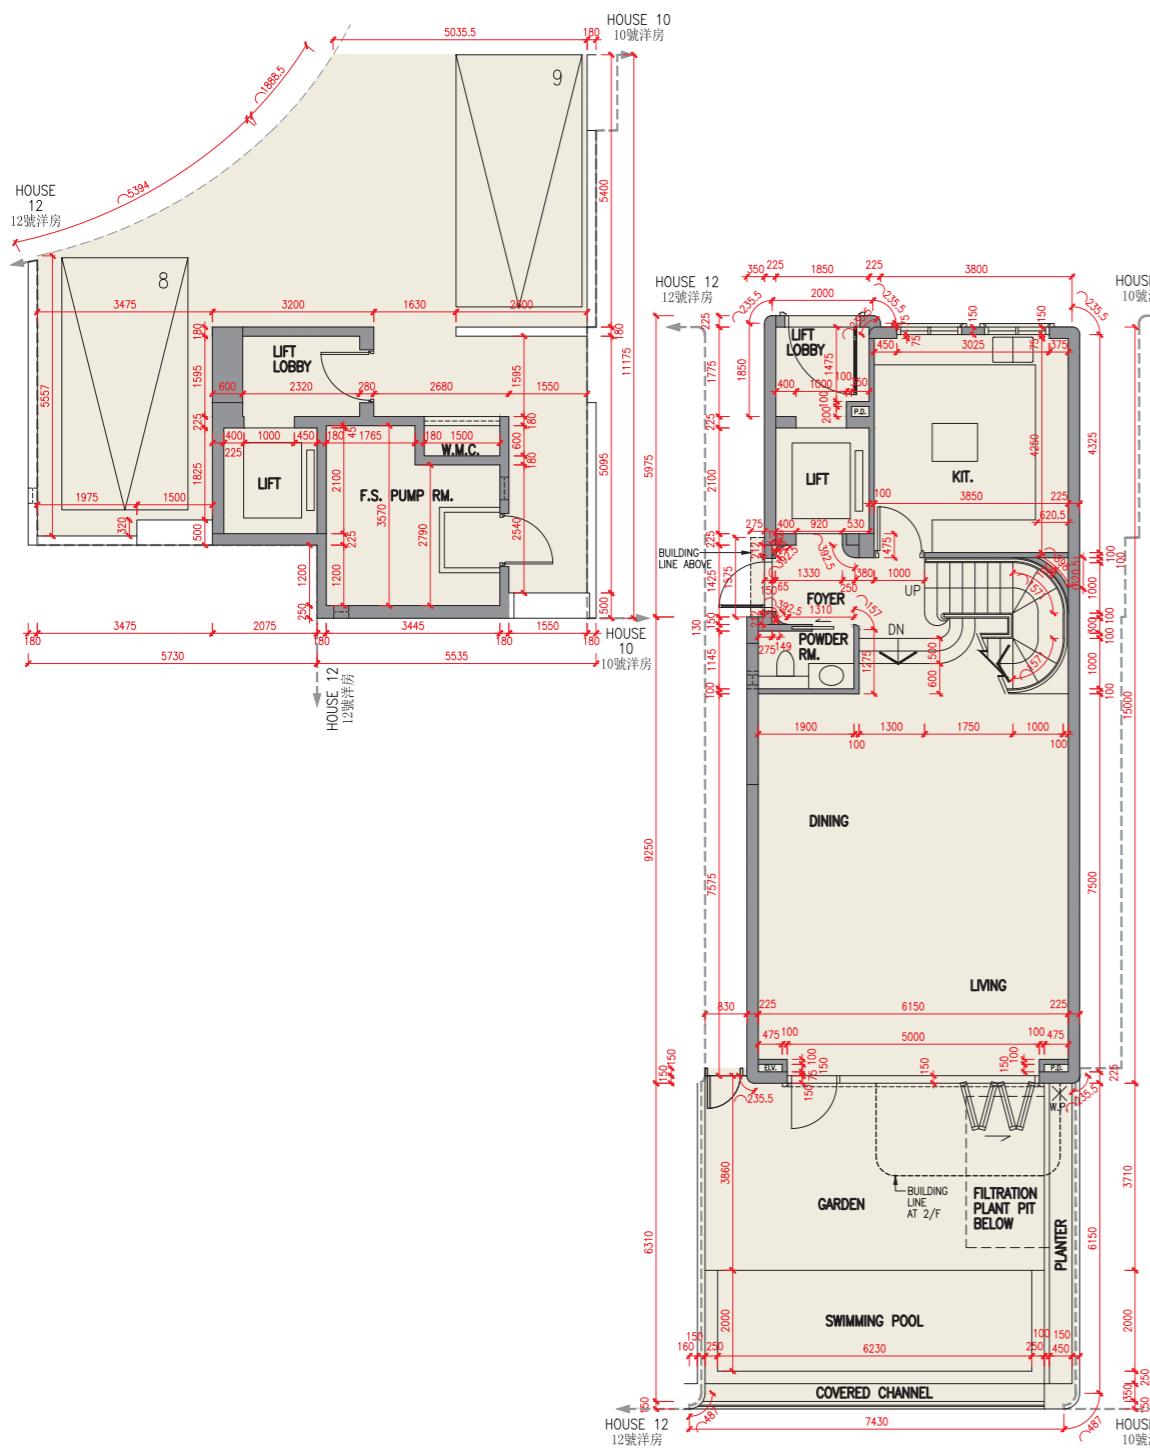
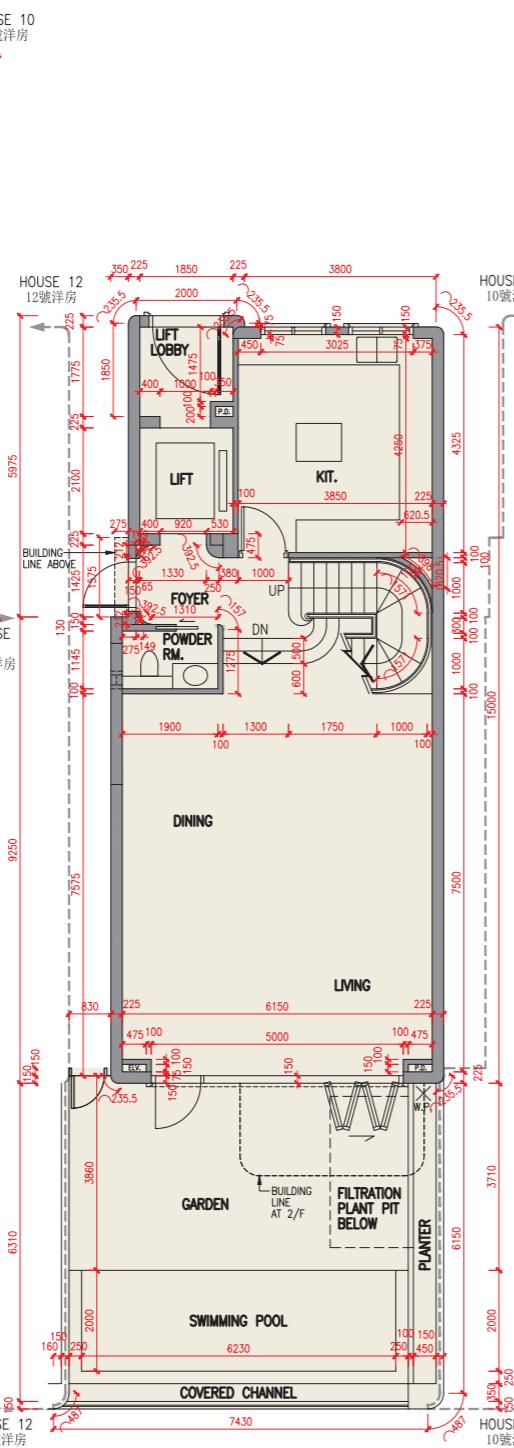
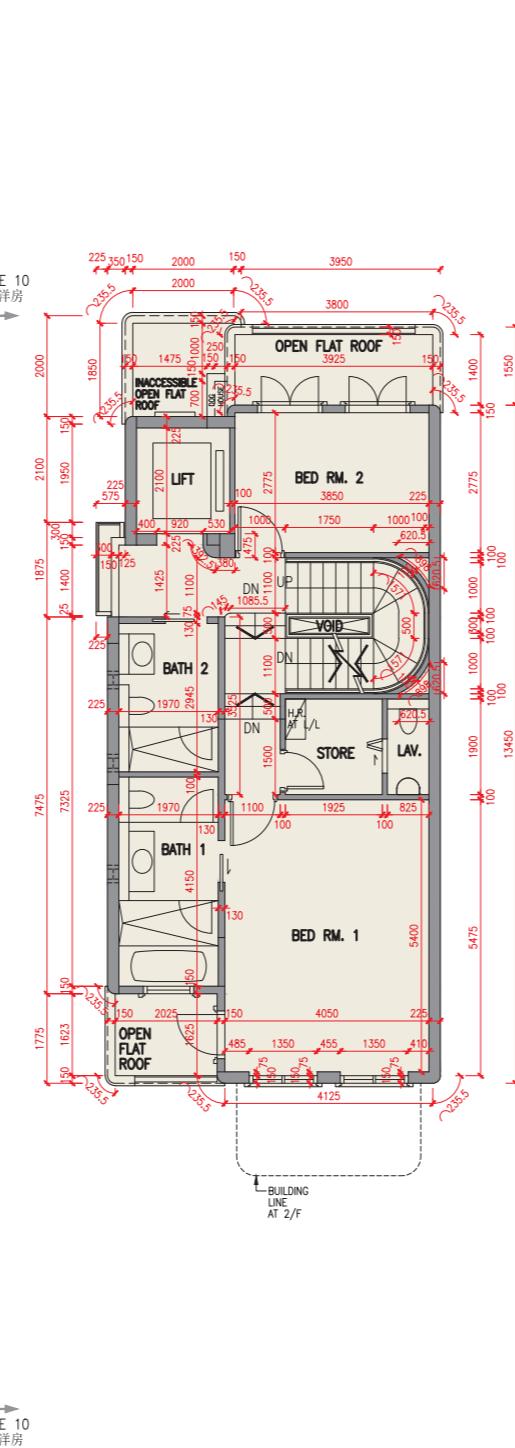
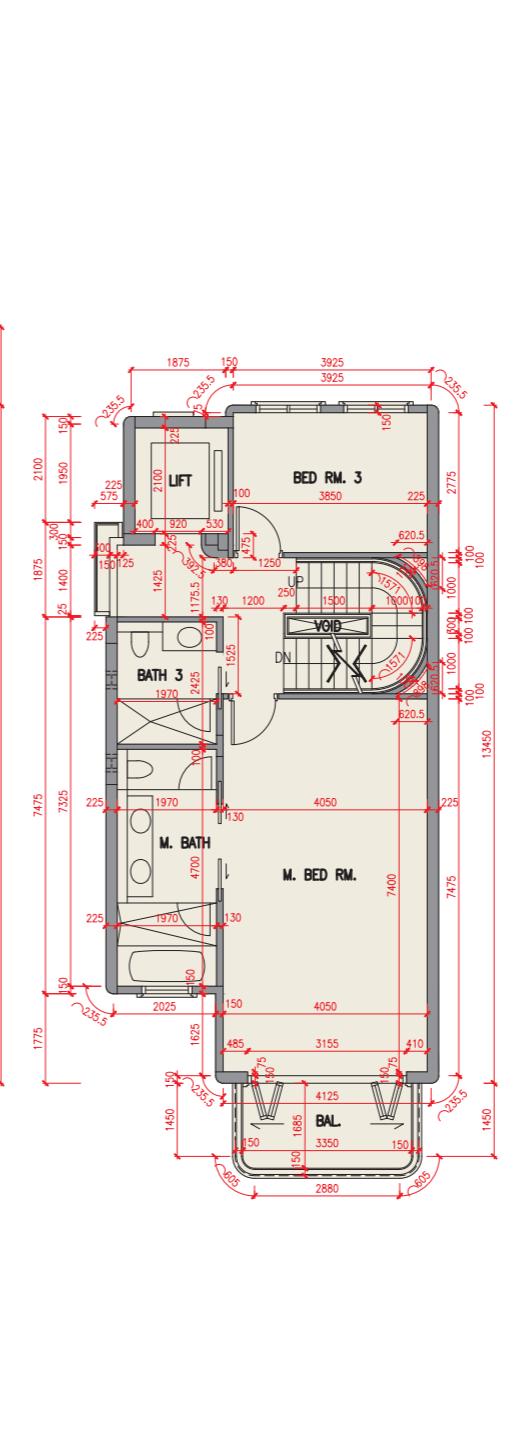
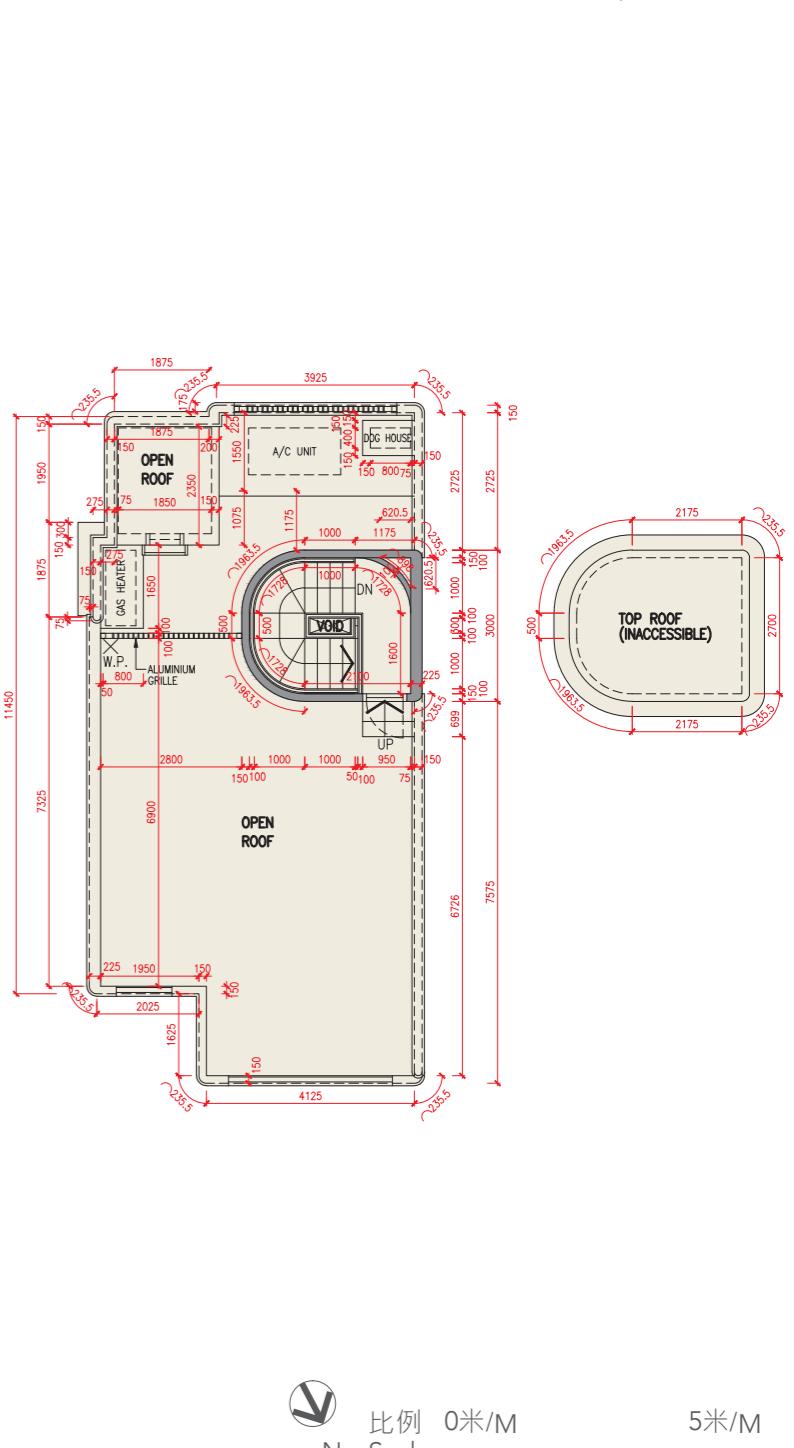
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 10 is/are located on the roof of the House.
- The area of each space which is designated under the Land Grant for parking purpose is 12.5 sq.m..
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.



11號洋房 House 11

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	9050, 9550	4000, 4500	3500	3500	2395	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200, 250	150, 300	150, 200	200	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

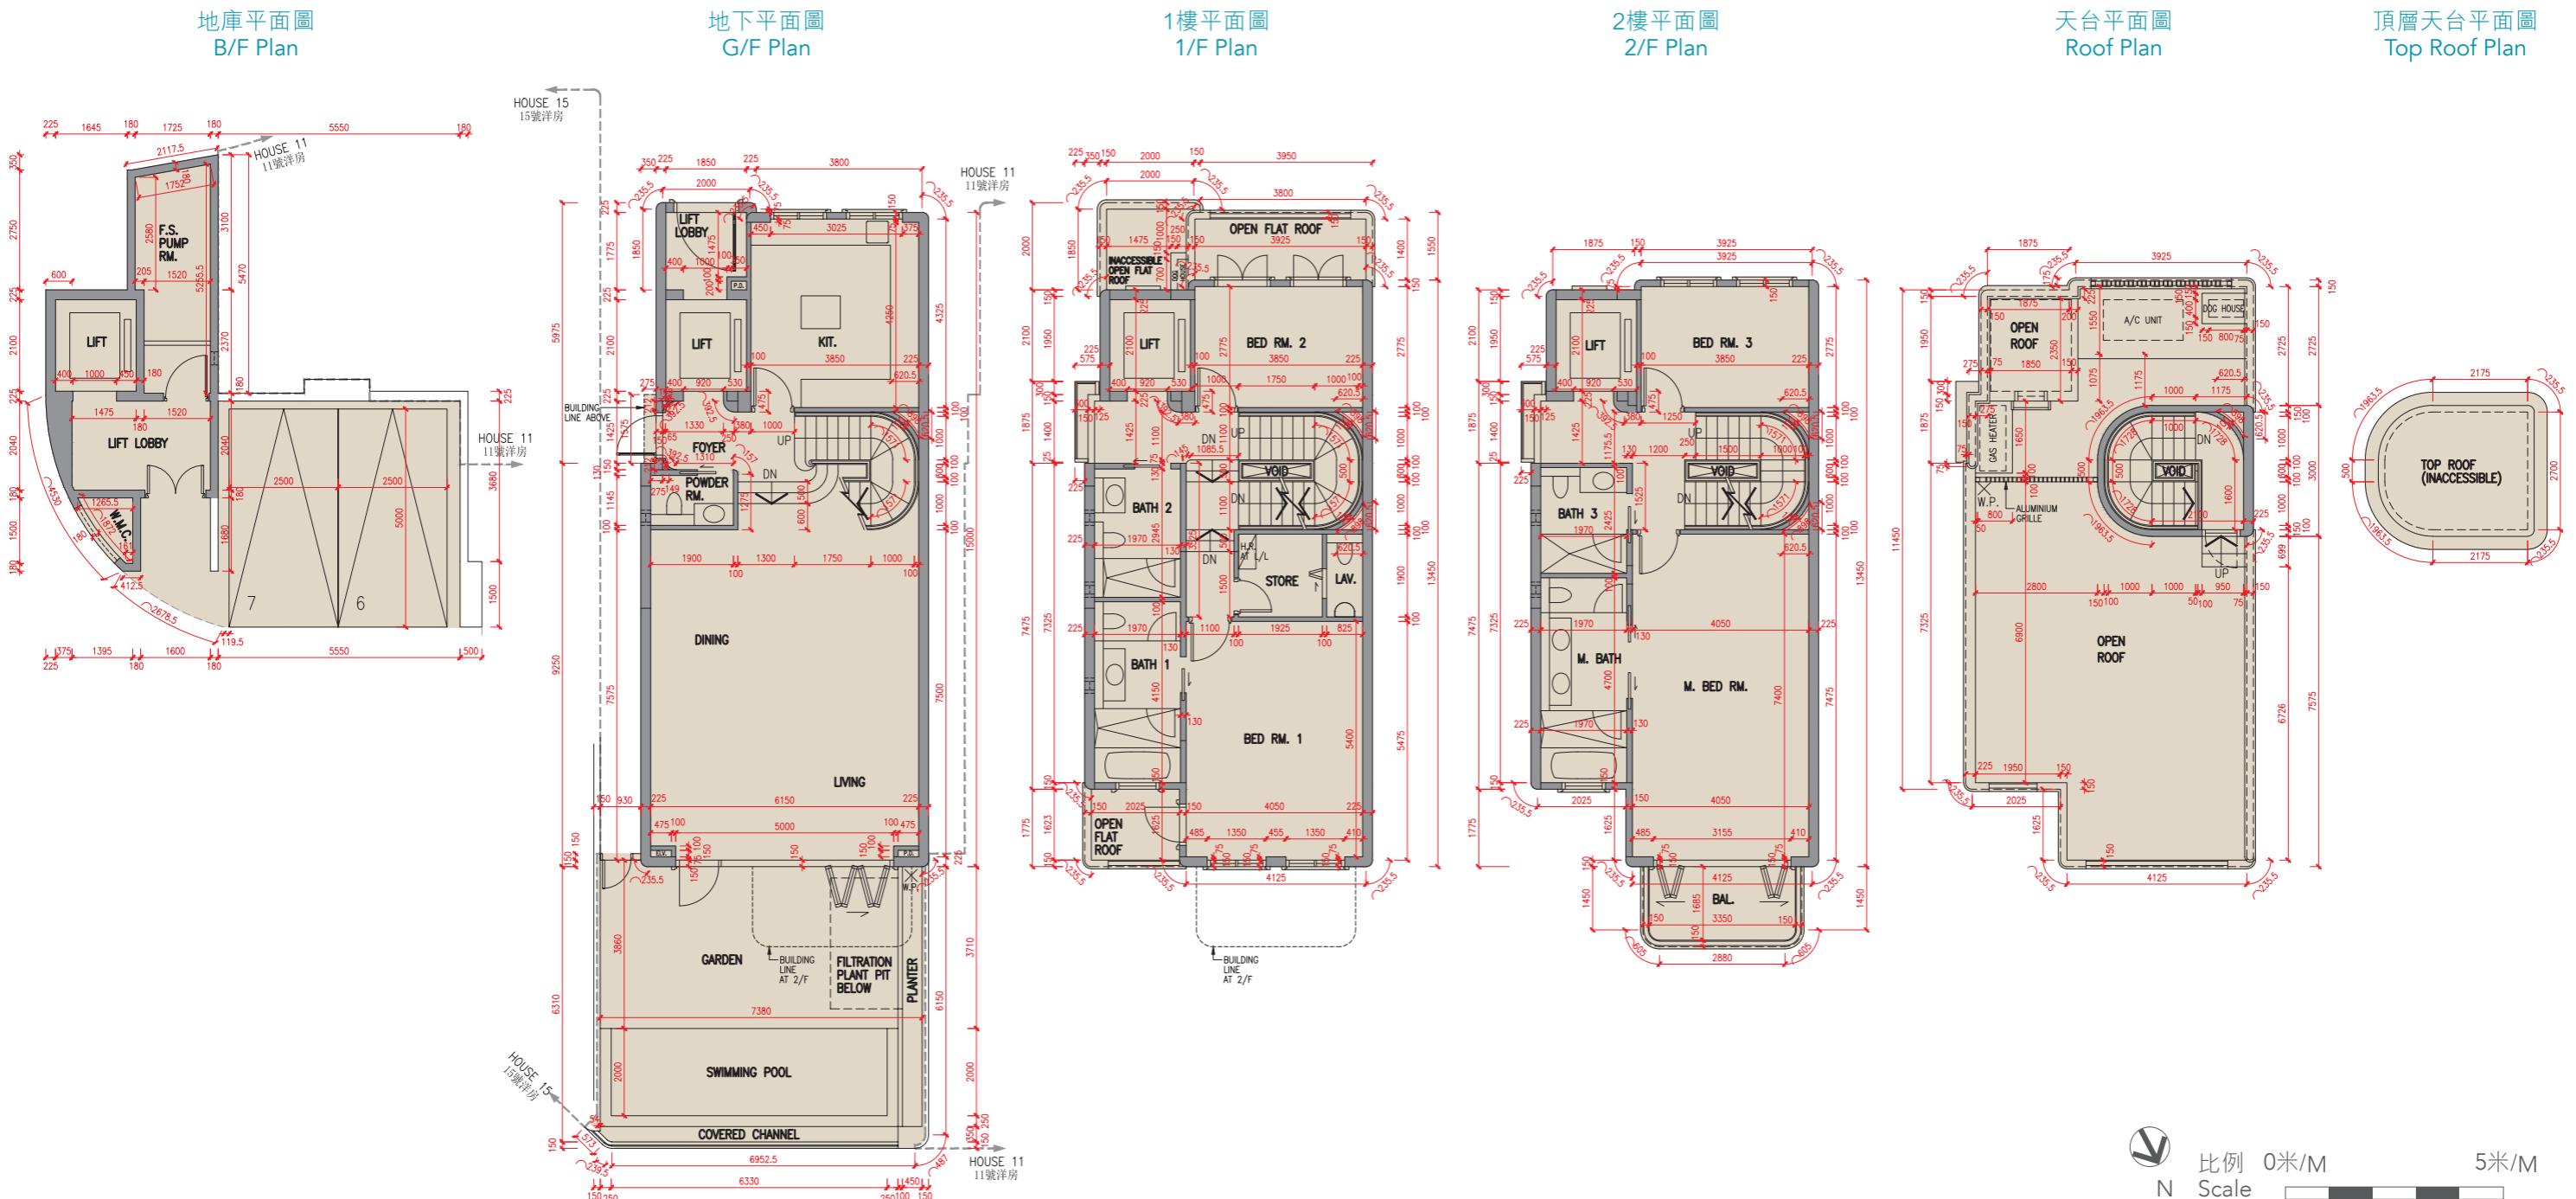
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 11號洋房的空調機室外機安裝於此洋房天台上。
- 批地文件指明每個用作停放下車輛地方的面積為12.5平方米。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 11 is/are located on the roof of the House.
- The area of each space which is designated under the Land Grant for parking purpose is 12.5 sq.m..
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

12號洋房 House 12



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8050, 8550	4000, 4500	3500	3500	2395	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200, 250	150, 300	150, 200	200	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

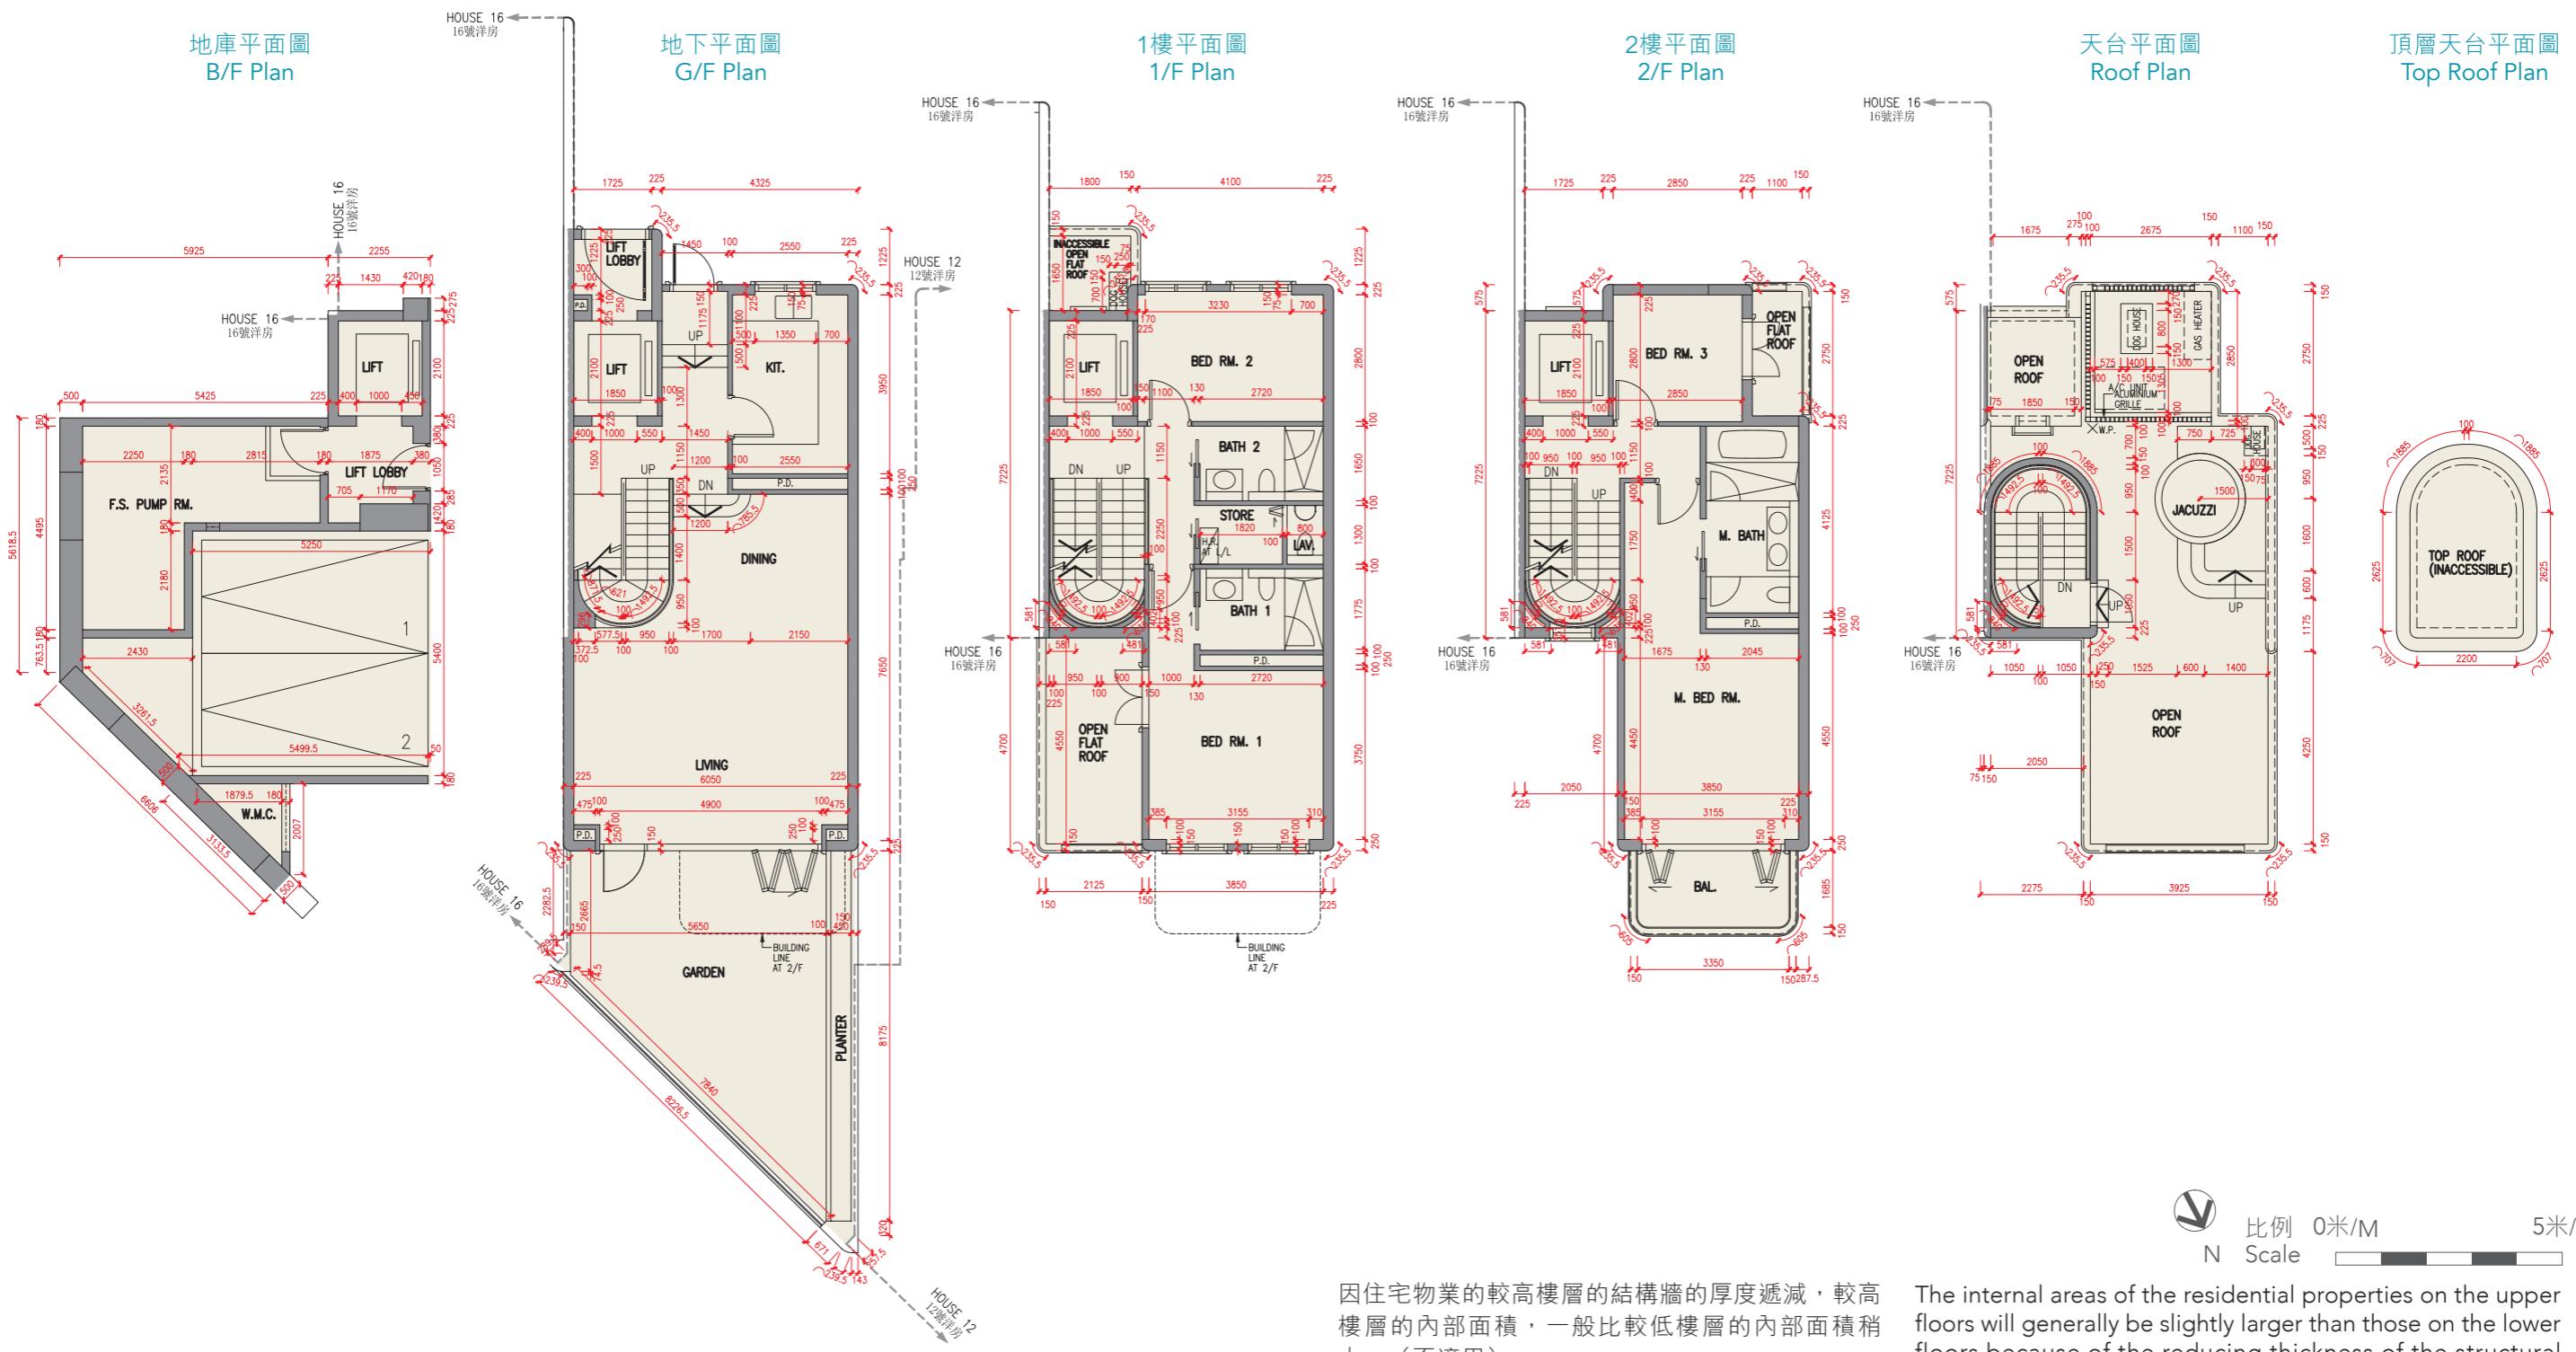
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 12號洋房的空調機室外機安裝於此洋房天台上。
- 批地文件指明每個用作停放車輛地方的面積為12.5平方米。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 12 is/are located on the roof of the House.
- The area of each space which is designated under the Land Grant for parking purpose is 12.5 sq.m..
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

15號洋房 House 15



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8550, 9050	4000, 4500	3500	3500	2450	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200	150, 175, 200	150, 175	175	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

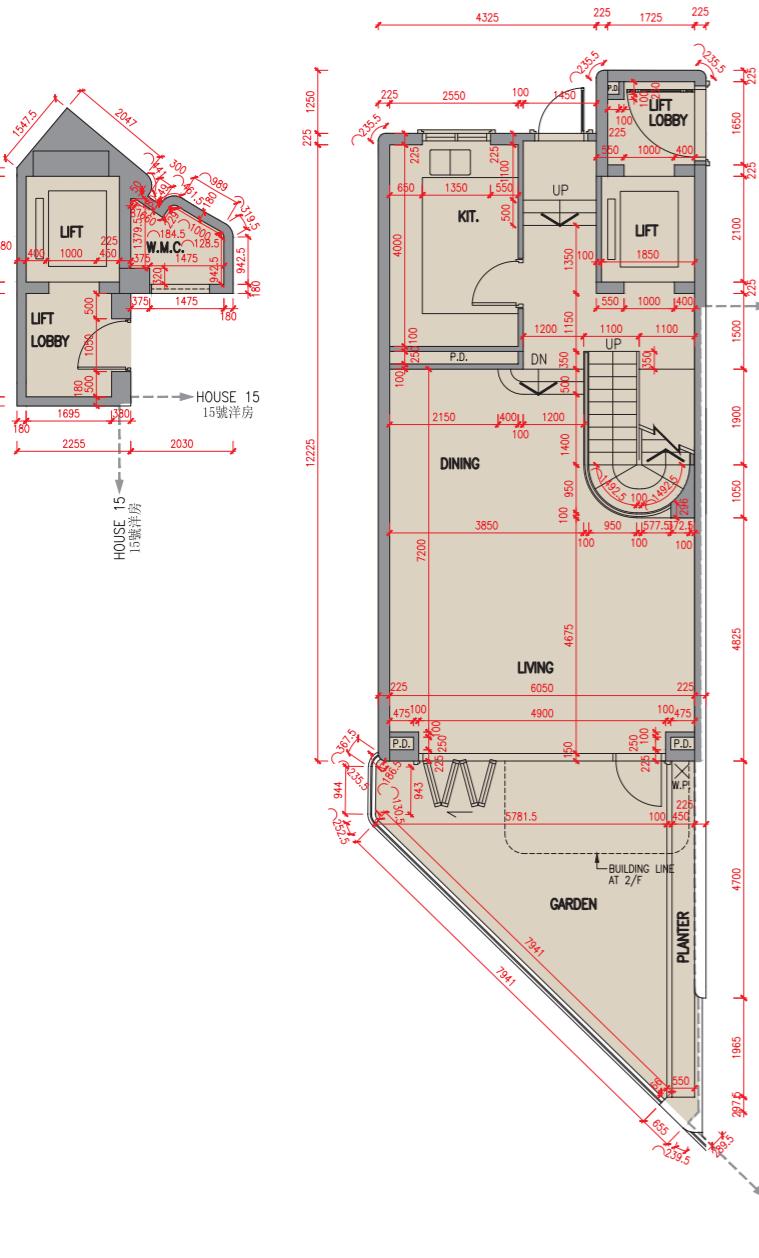
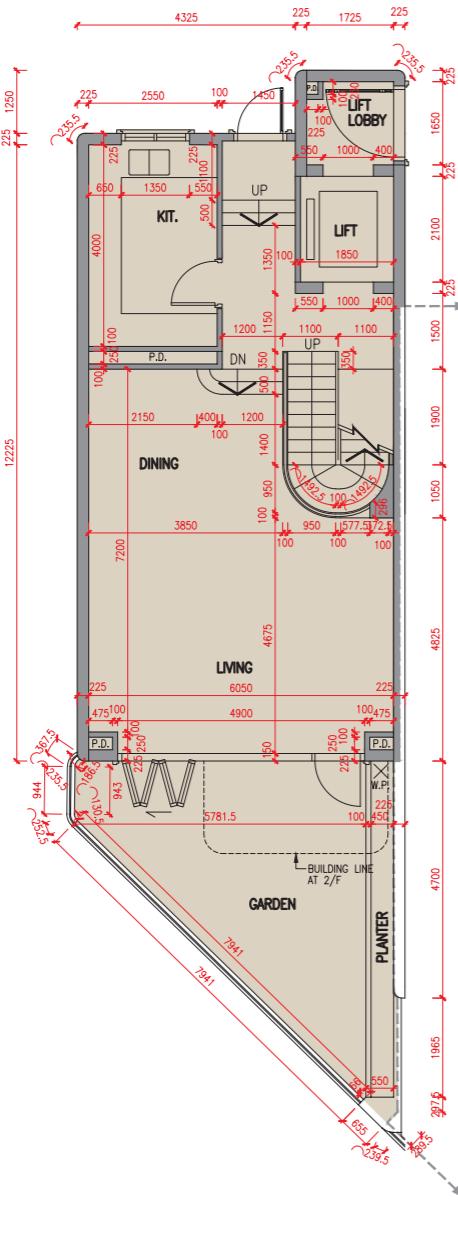
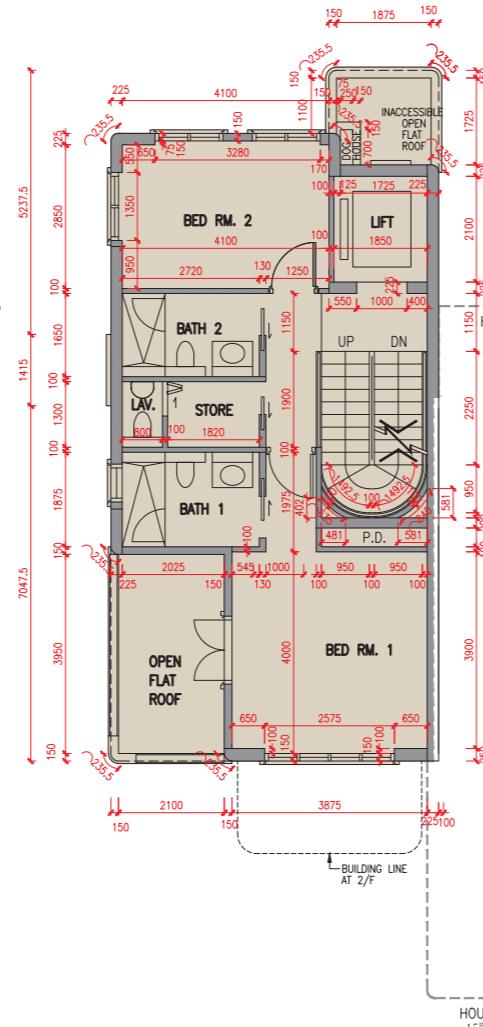
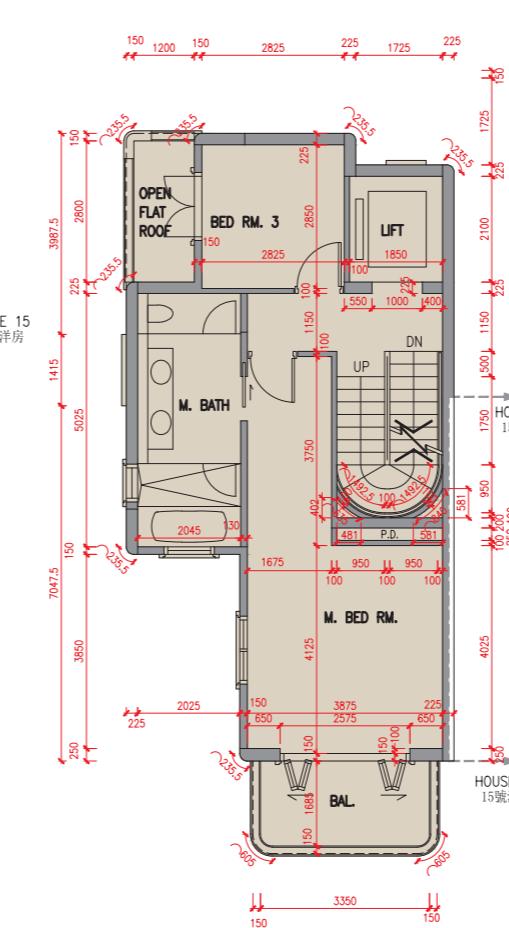
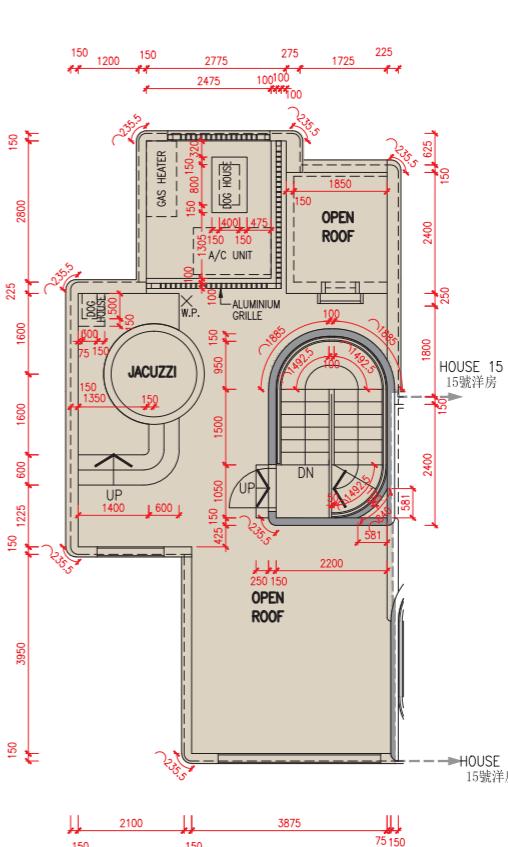

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 15號洋房的空調機室外機安裝於此洋房天台上。
- 批地文件指明每個用作停放車輛地方的面積為12.5平方米。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 15 is/are located on the roof of the House.
- The area of each space which is designated under the Land Grant for parking purpose is 12.5 sq.m..
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

16號洋房 House 16

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

N 比例 0米/M
Scale 5米/M

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	8550, 9050	4000, 4500	3500	3500	2450	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200	150, 175, 200	150, 175	175	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

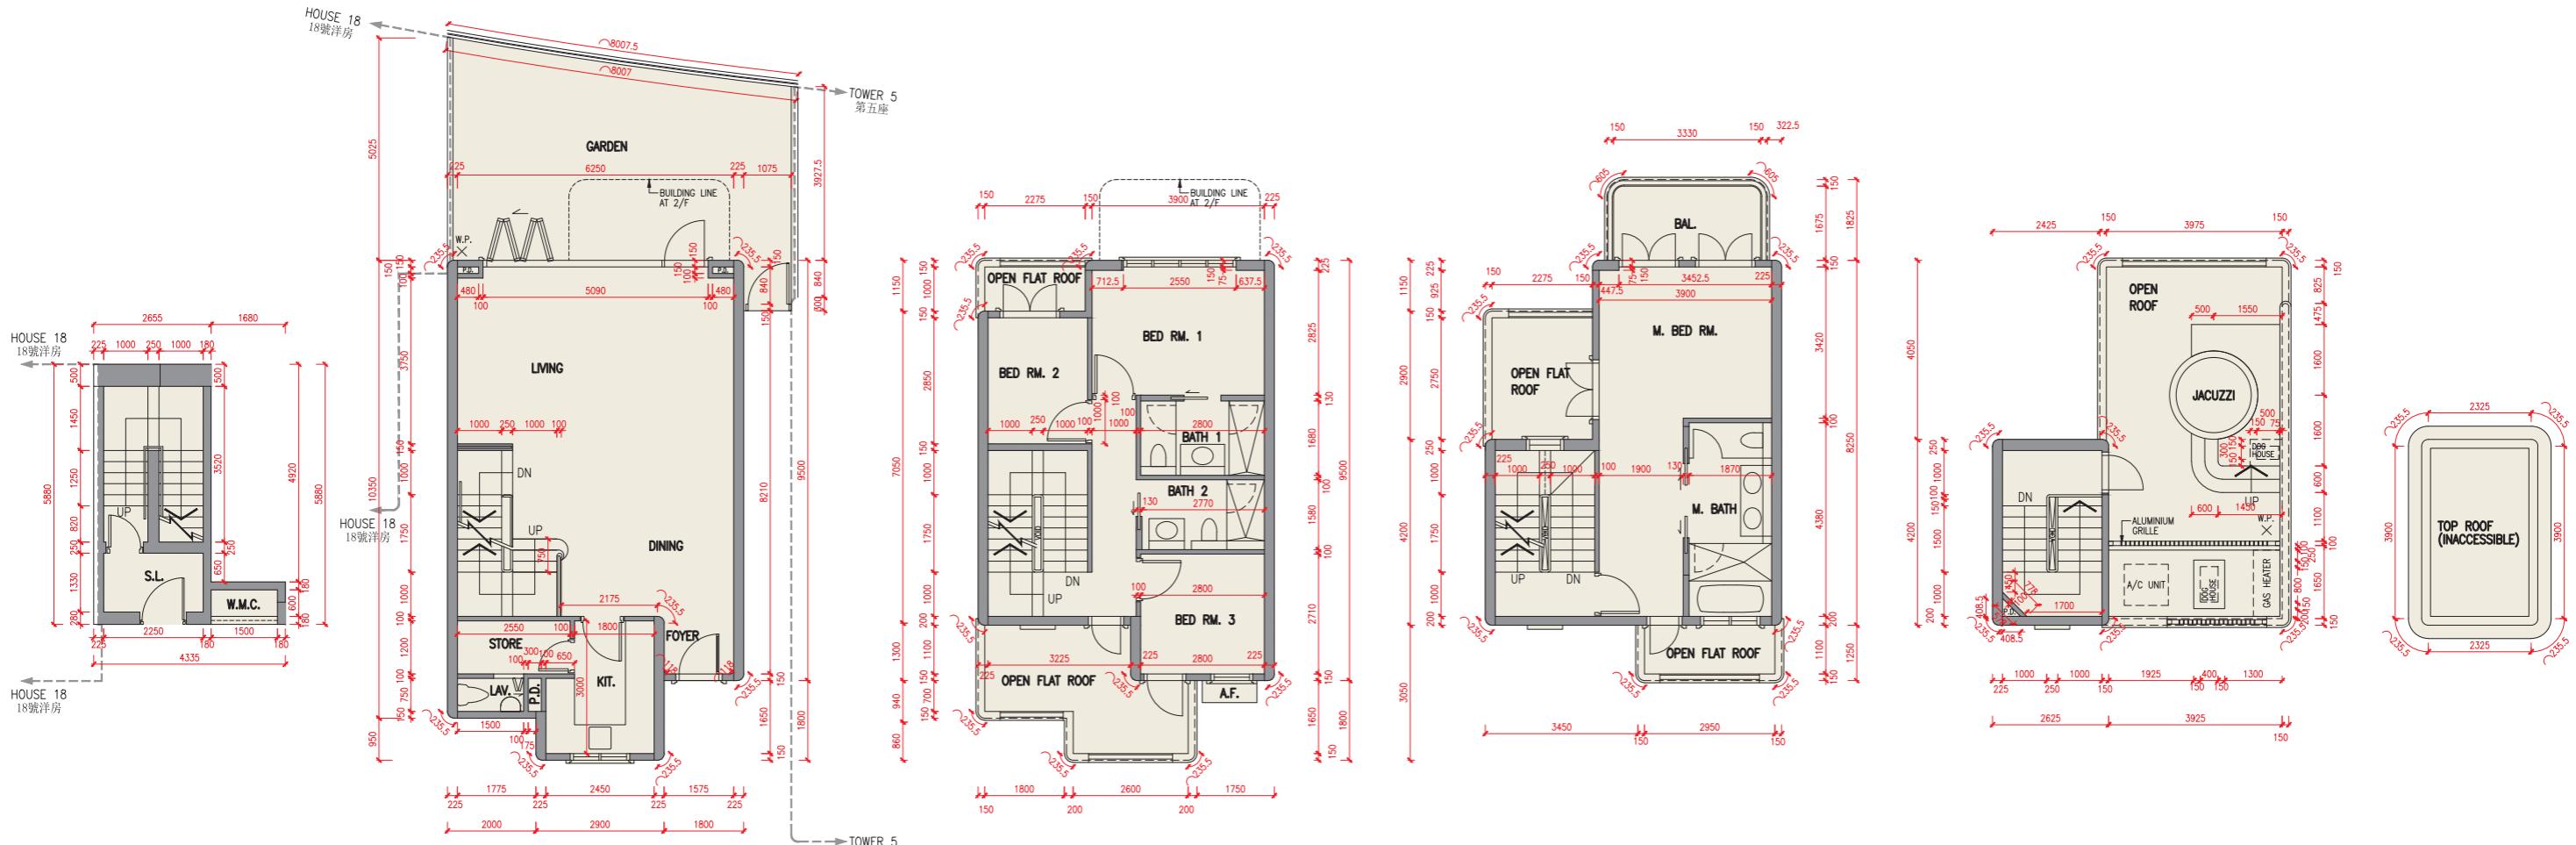
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 16號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 16 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

17號洋房 House 17

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	5450	4000	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150, 175	150	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

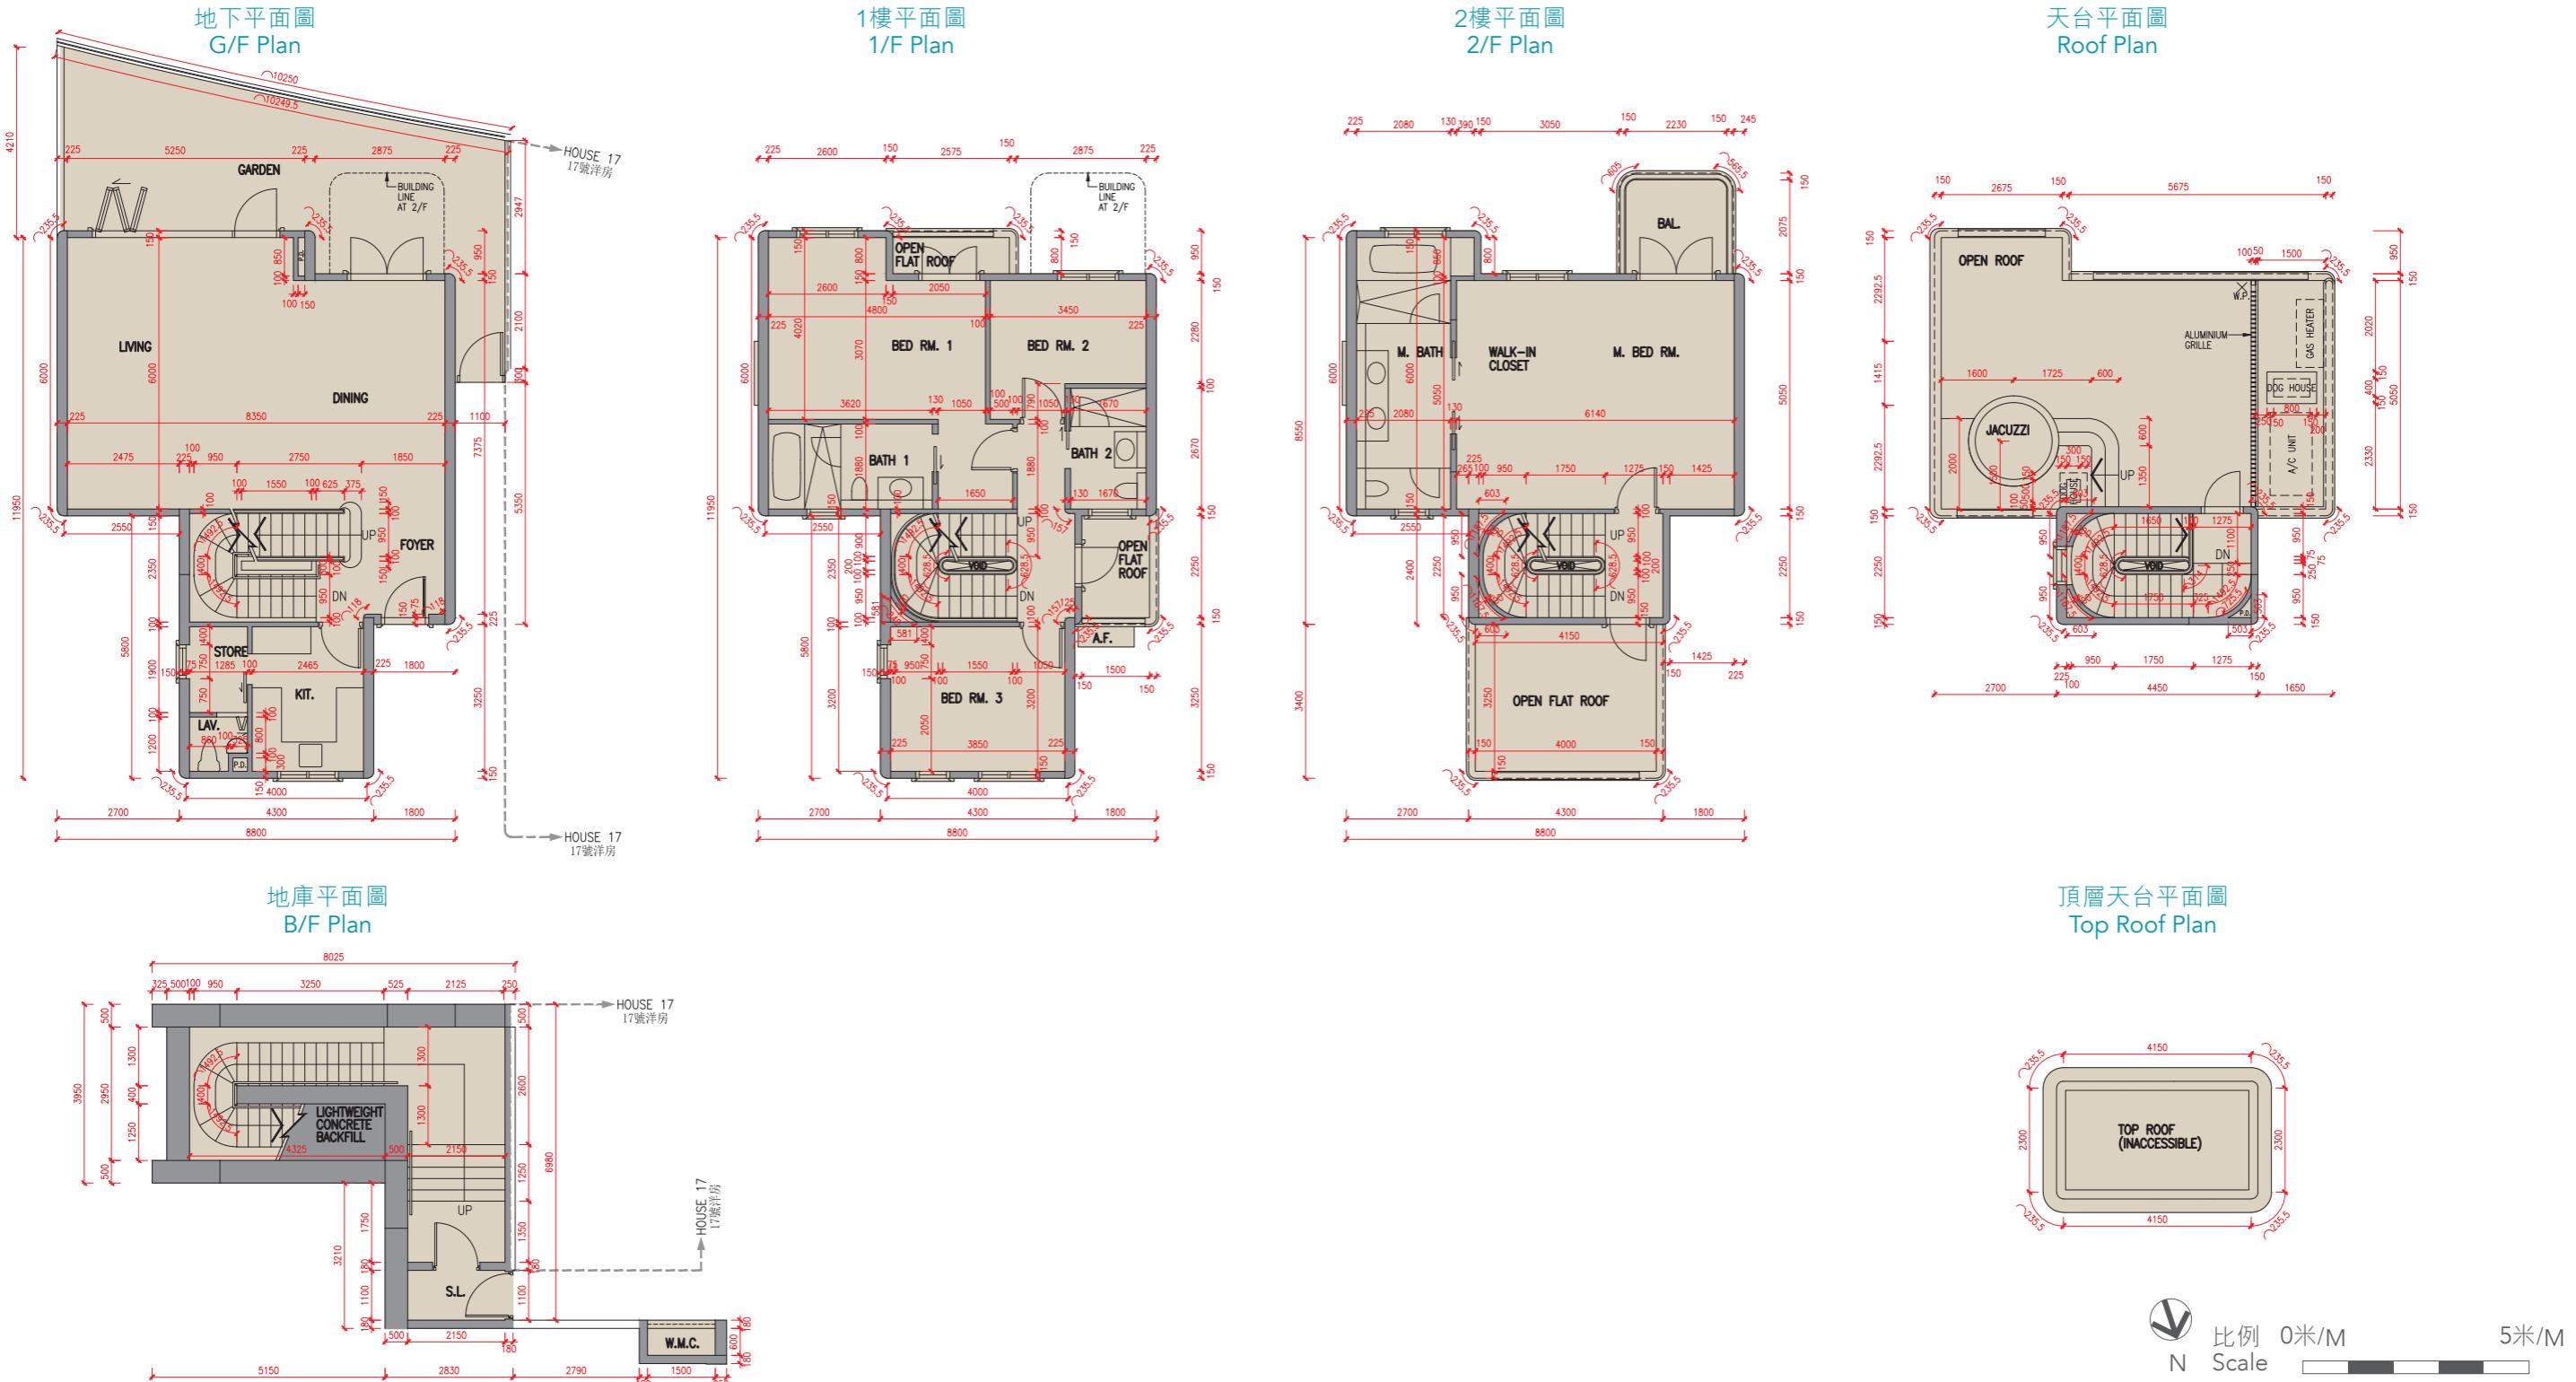
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 17號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 17 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

18號洋房 House 18



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	5450	4000	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150, 300	150	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

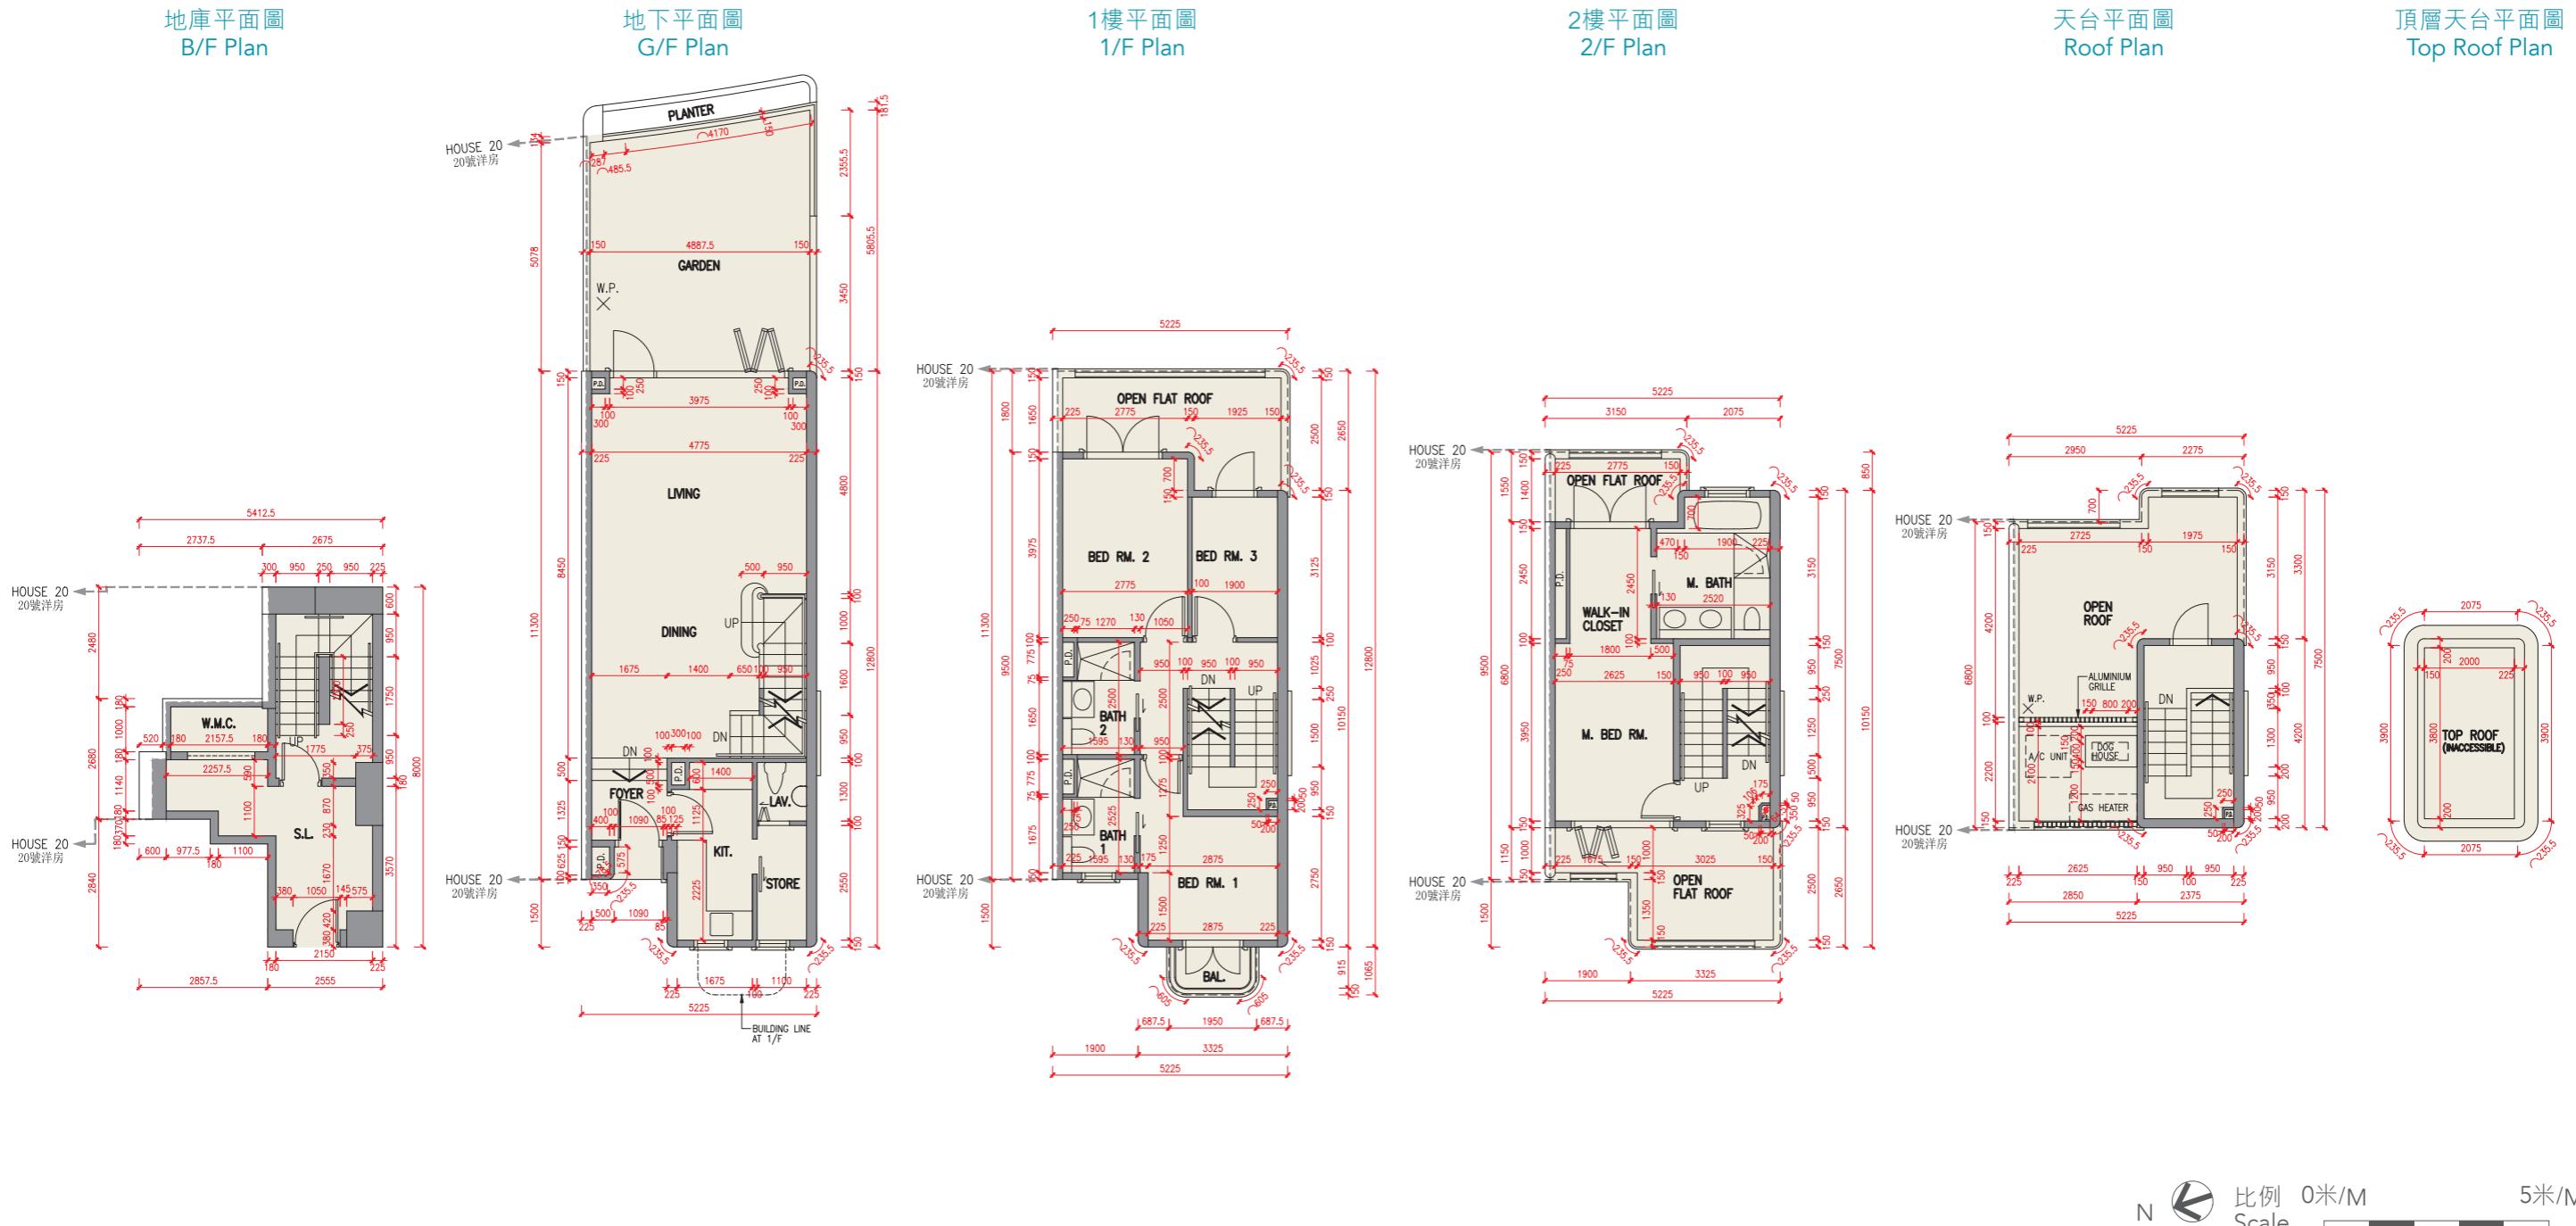
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 18號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 18 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

19號洋房 House 19



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	6300, 10800	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150, 200	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

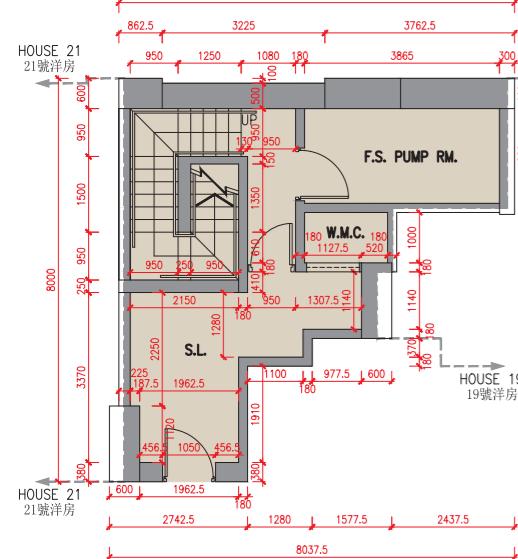
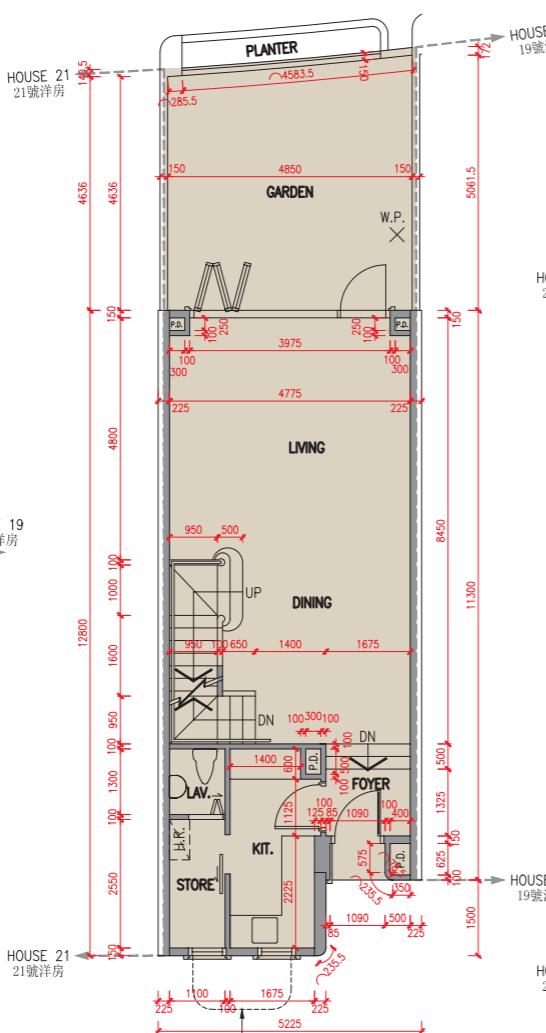
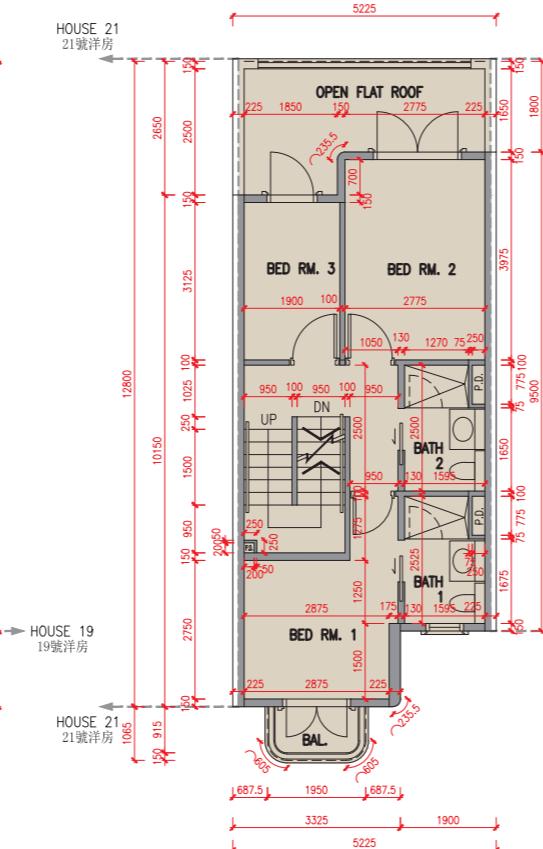
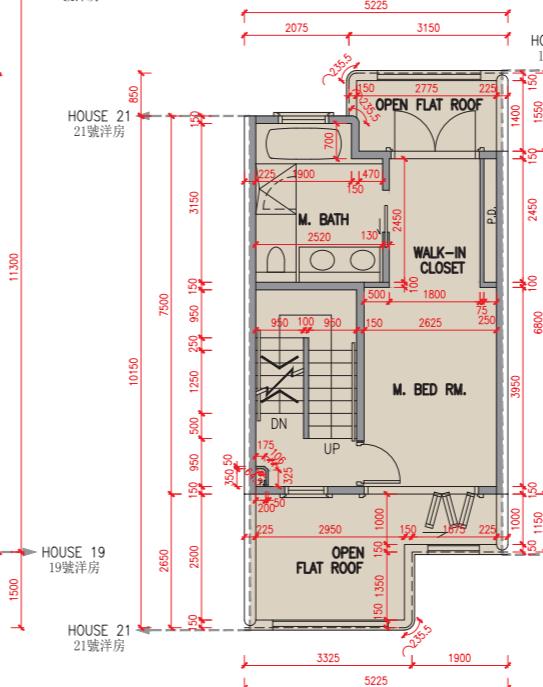
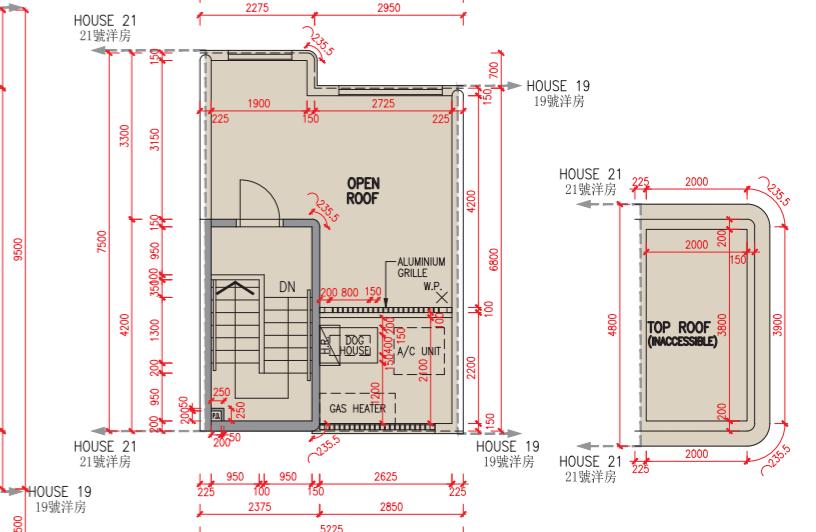
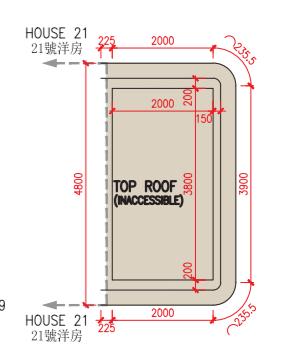
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 19號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 19 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

20號洋房 House 20

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

N 比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 20號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

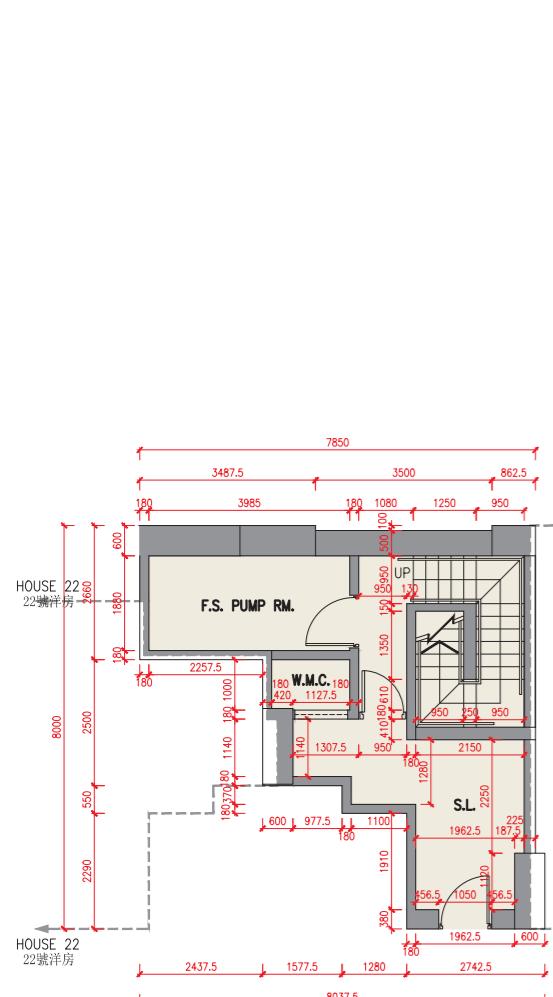
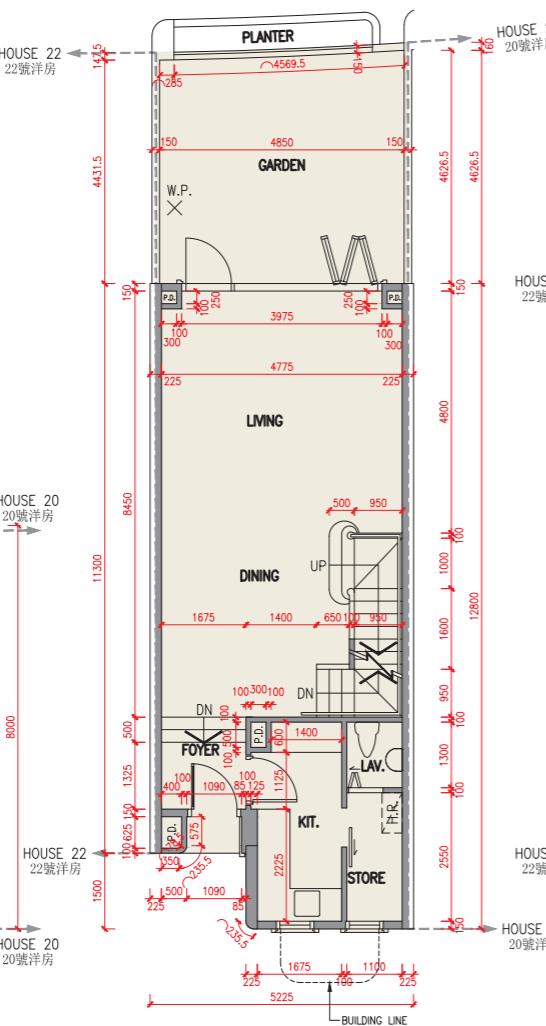
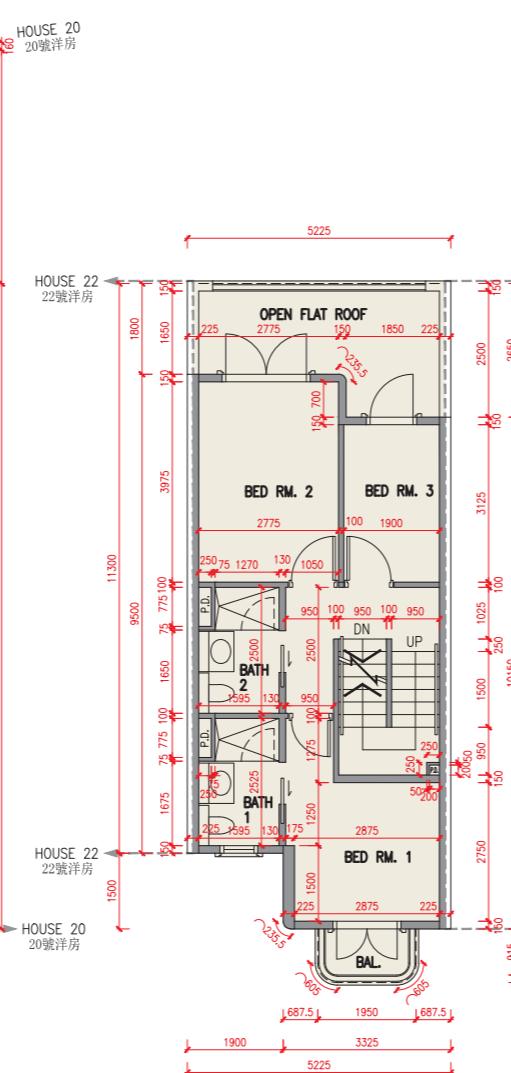
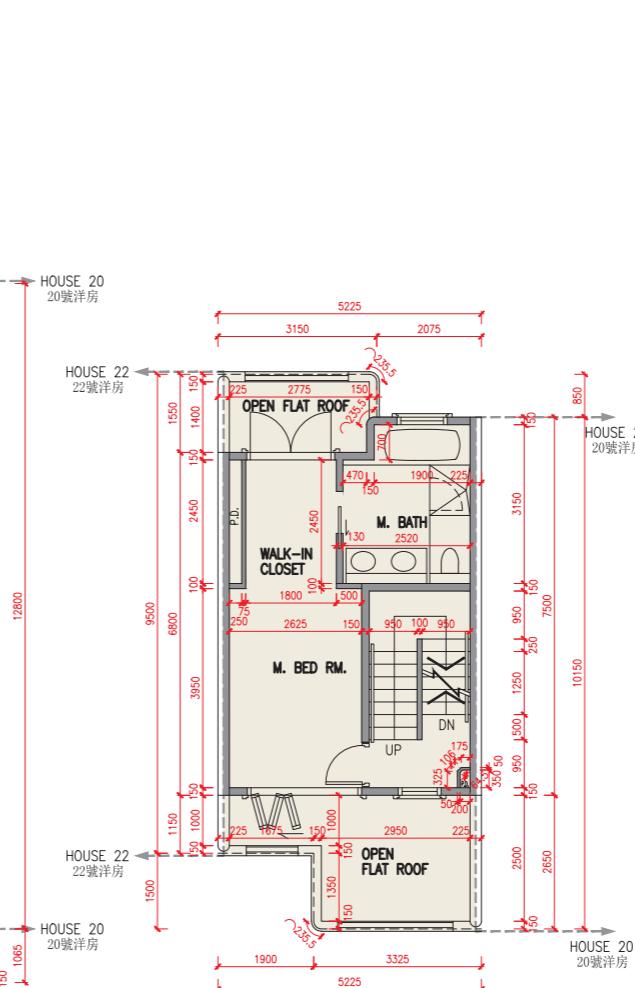
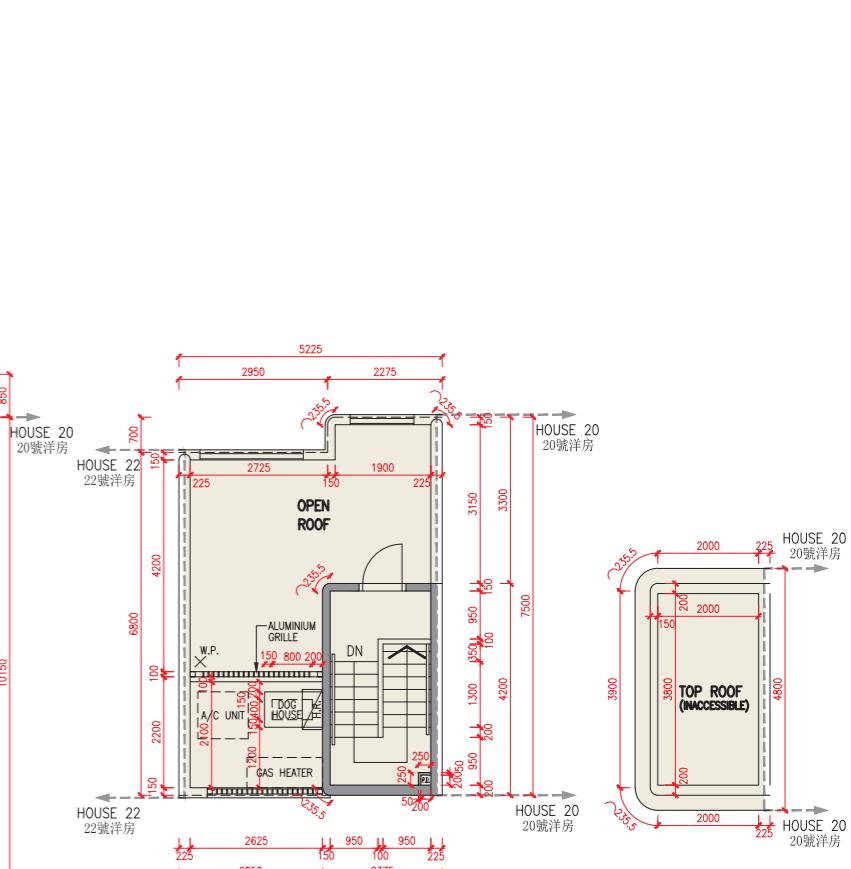
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 20 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	5550, 10050	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200	150, 200	150, 300	150	

21號洋房 House 21

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	5550, 10050	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200	150, 200	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

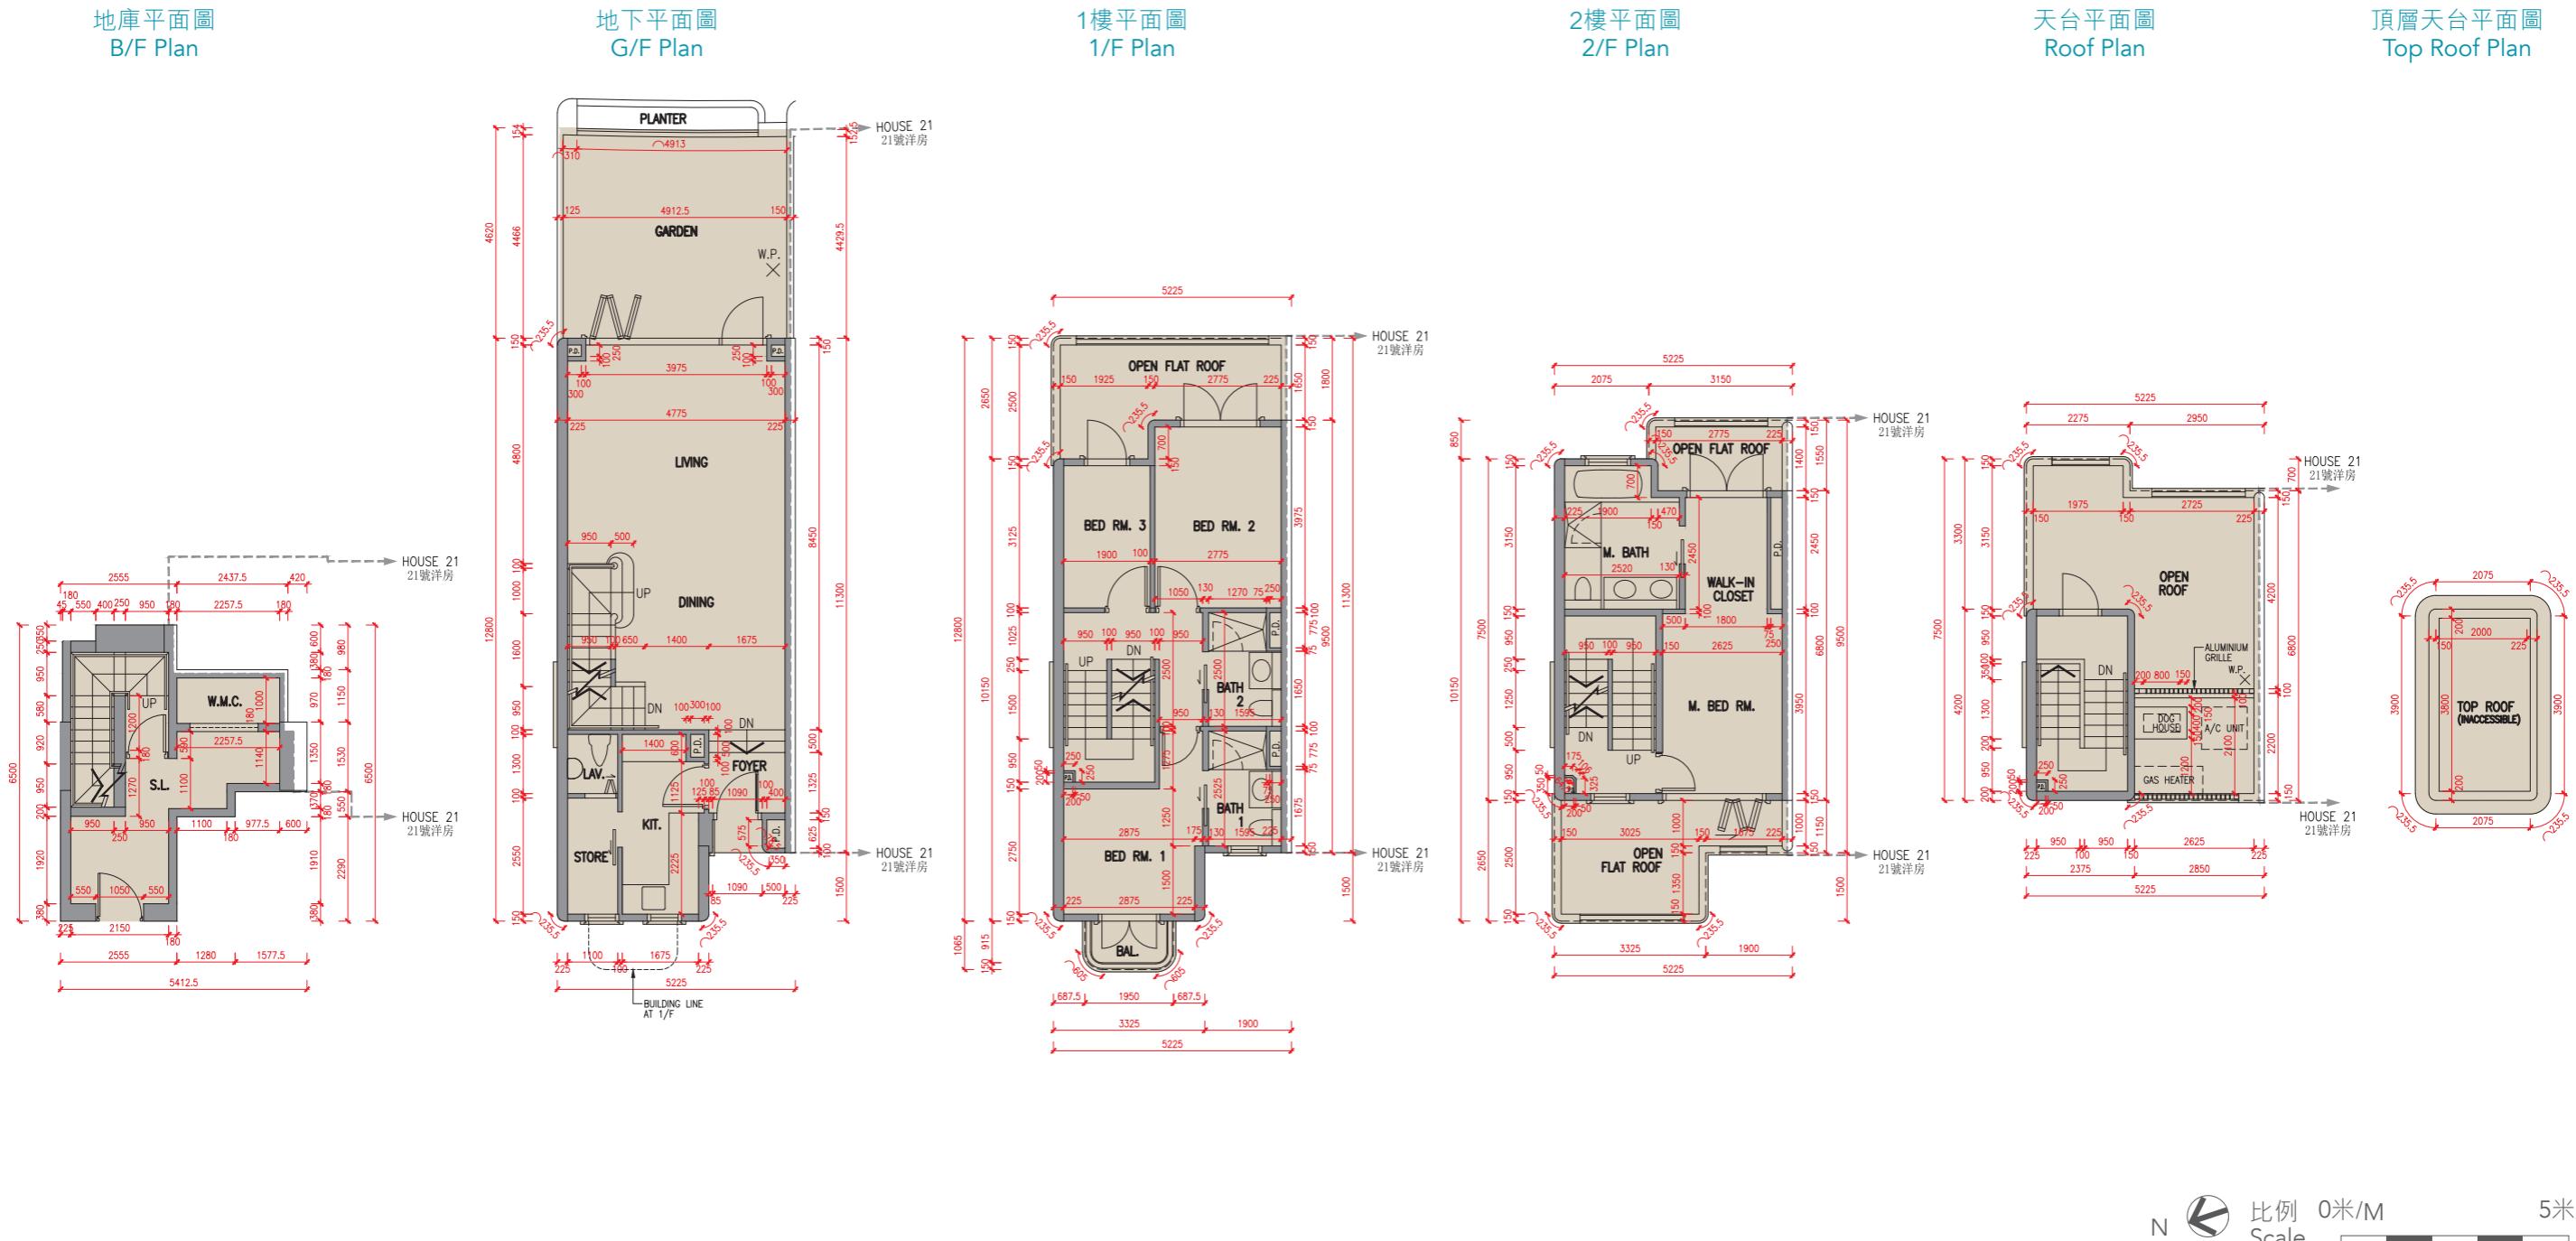
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 21號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 21 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

22號洋房 House 22



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	4550, 9050	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250, 300	200	150, 200	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

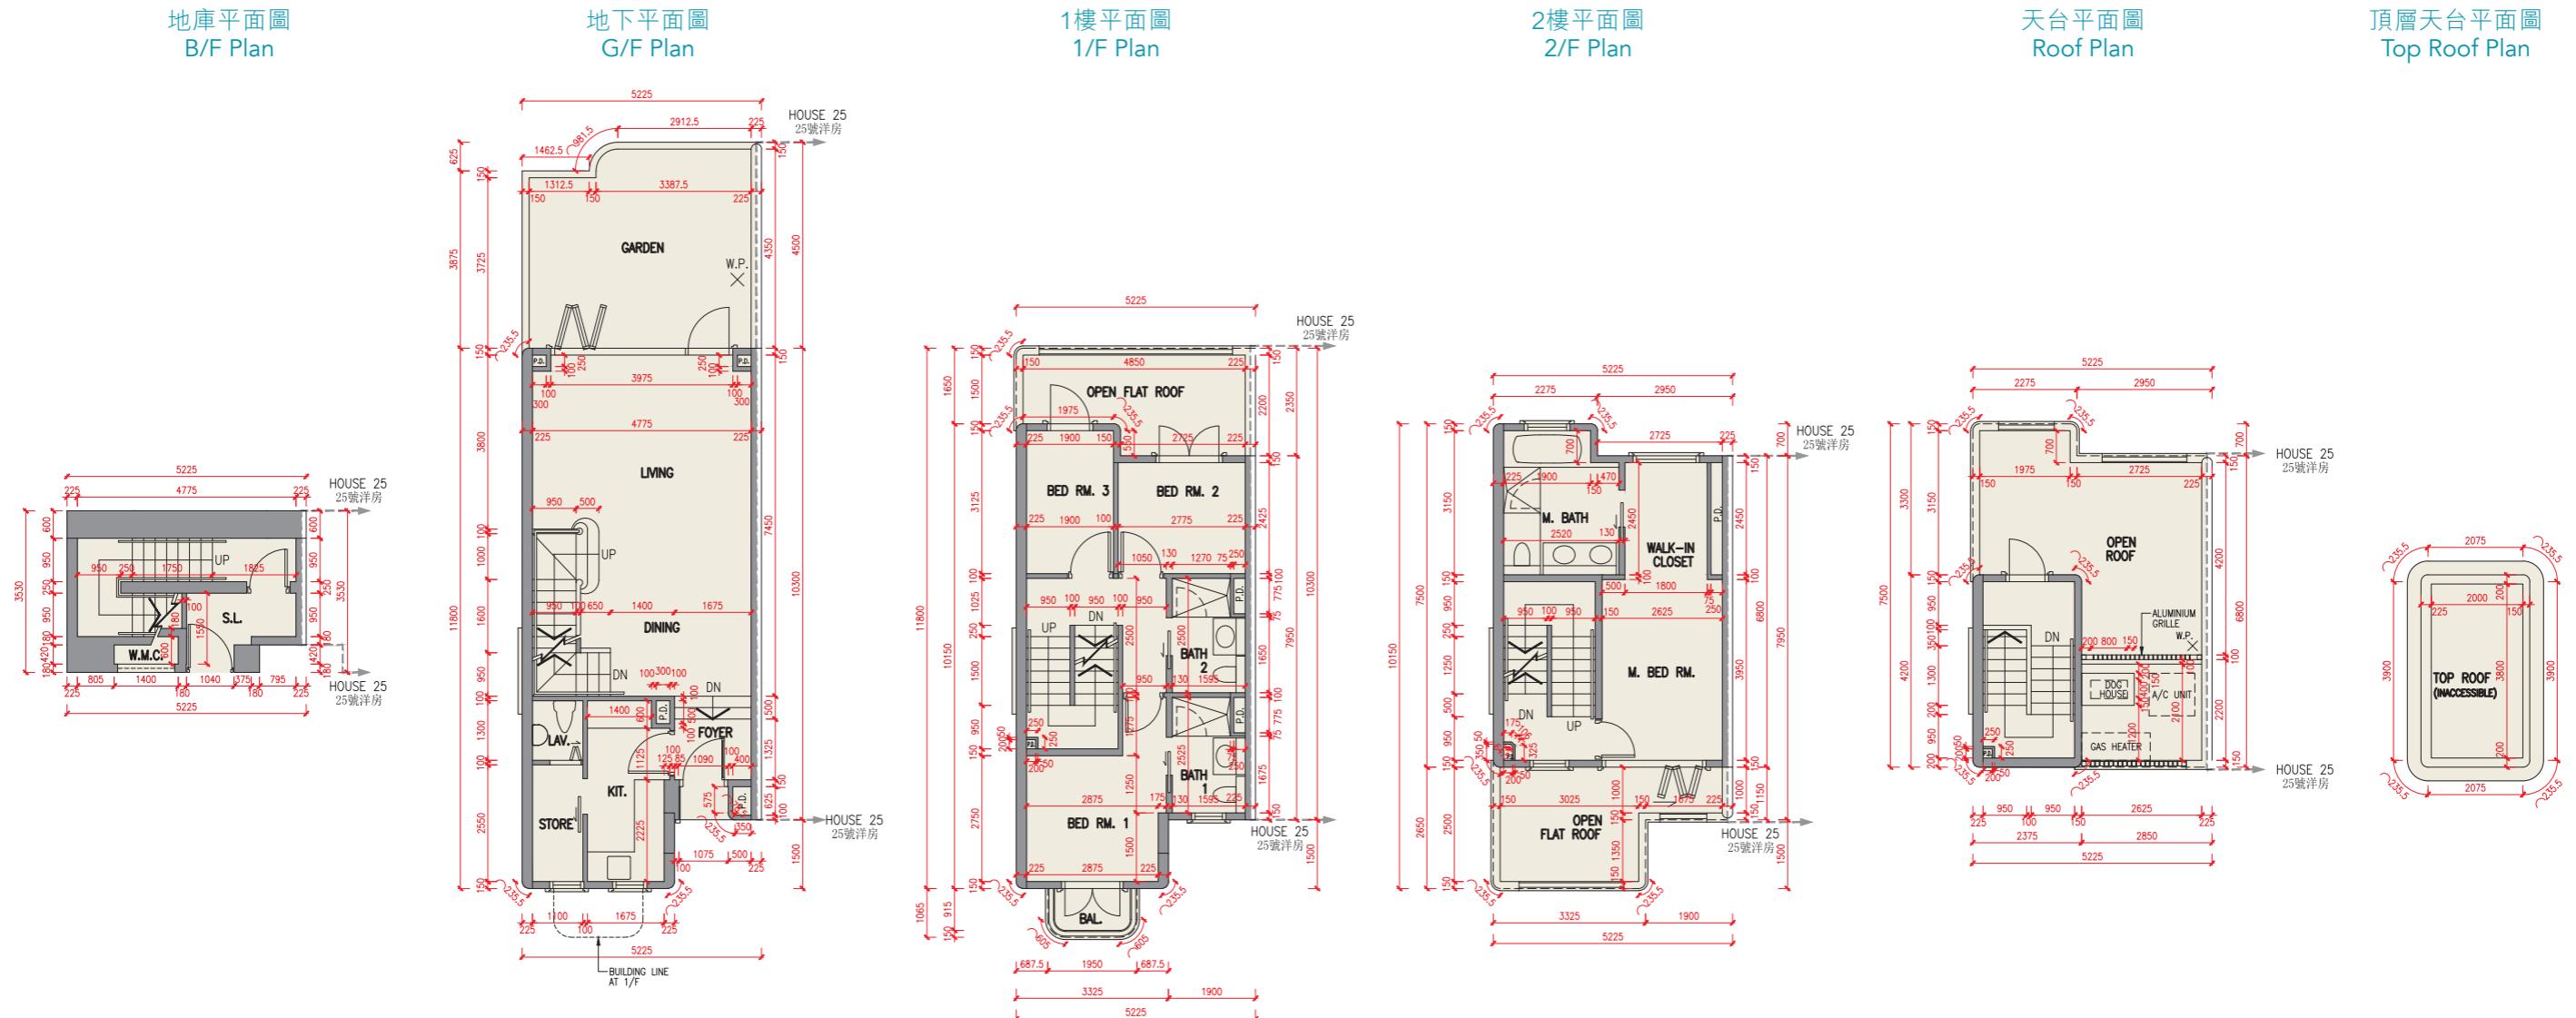
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 22號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 22 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

23號洋房 House 23



比例 0米/M
Scale 0m/M

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	6650	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

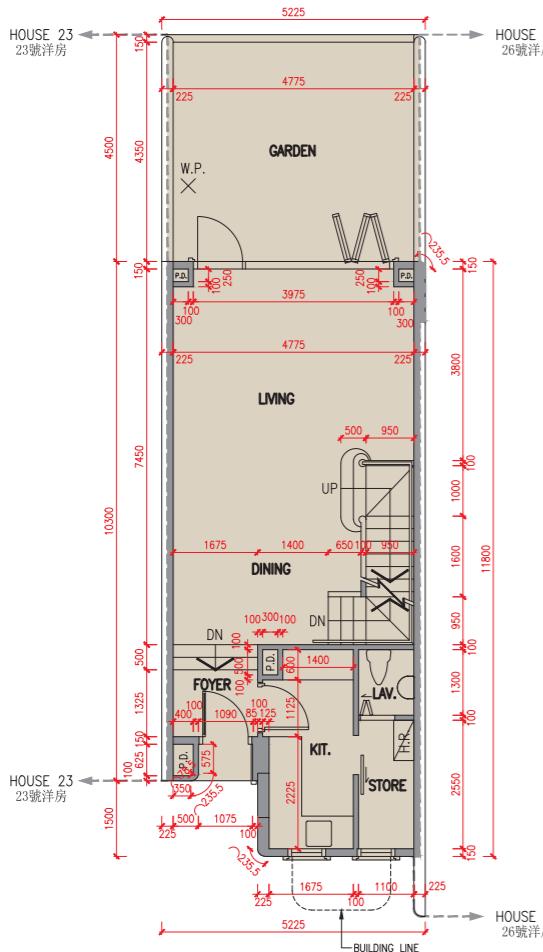
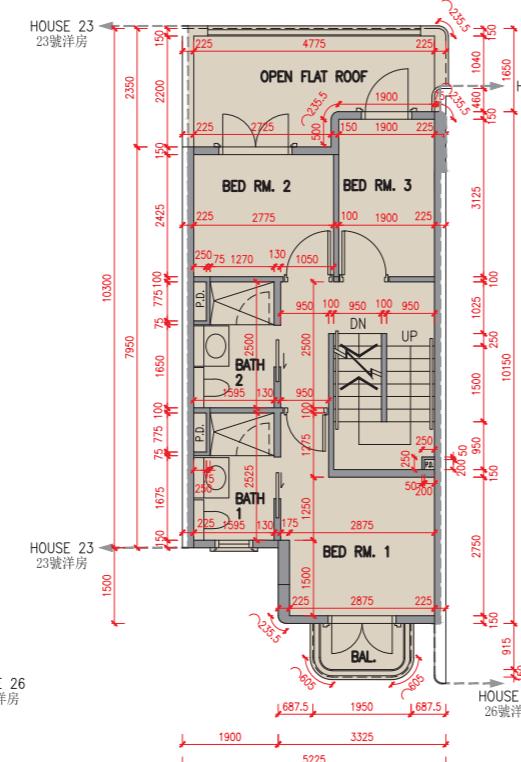
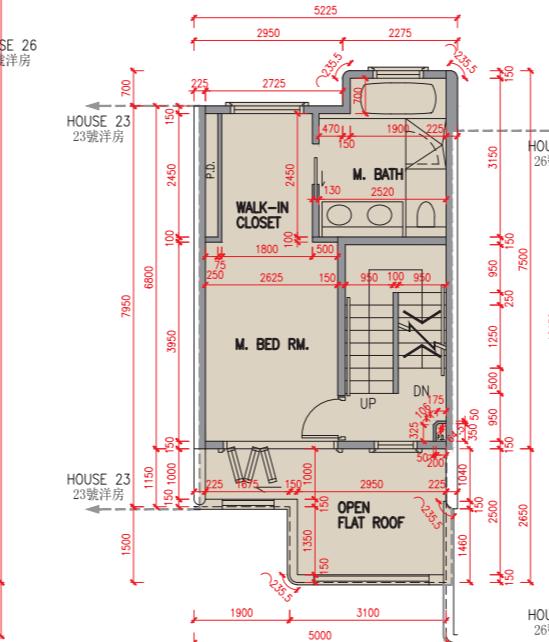
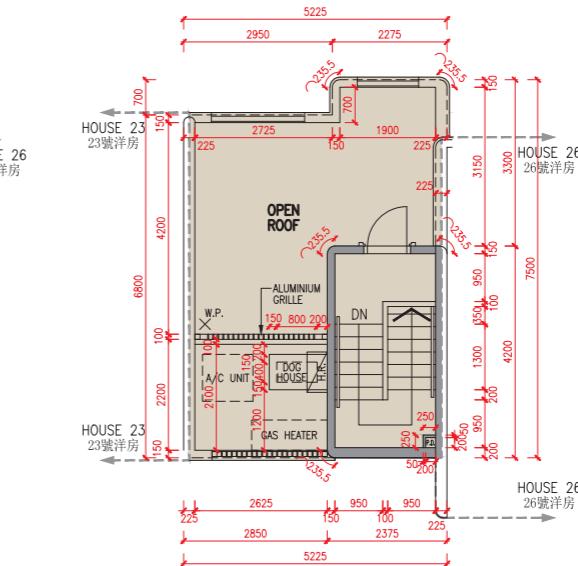
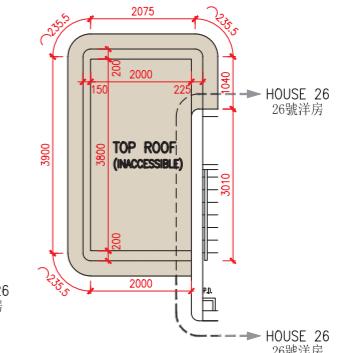
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 23號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 23 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

25號洋房 House 25

地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	6650	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 25號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

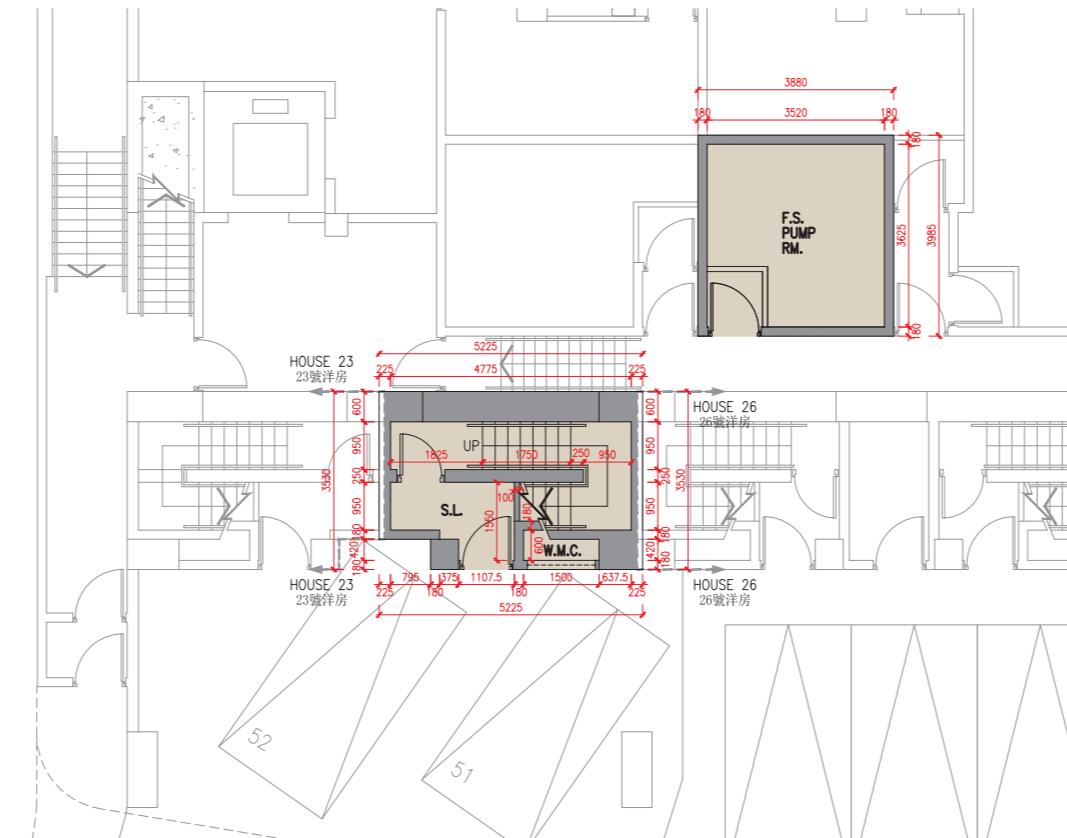
Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 25 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

25號洋房 House 25

地庫平面圖

B/F Plan



比例 Scale 0米/M 5米/M
N

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	6650	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

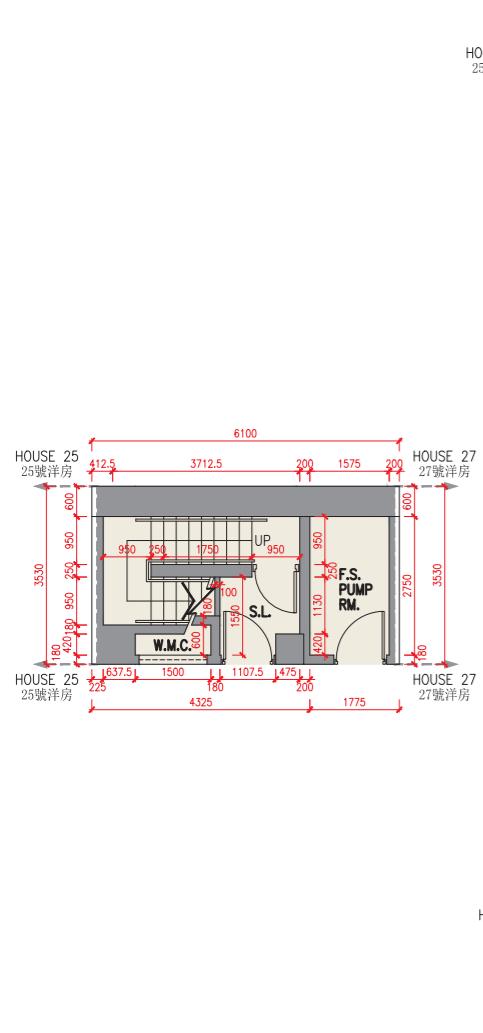
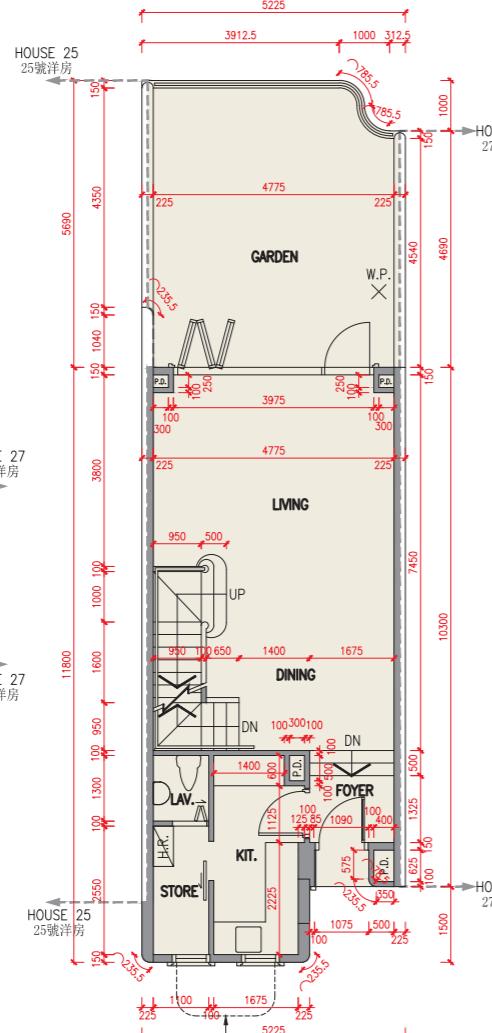
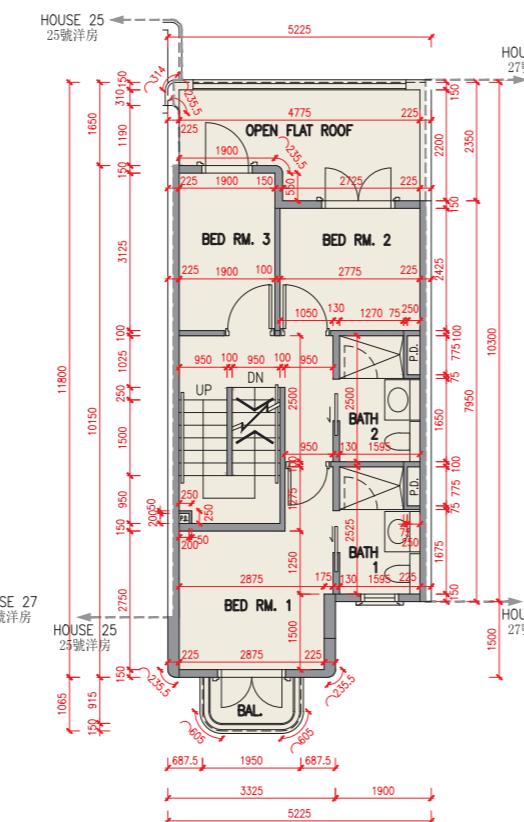
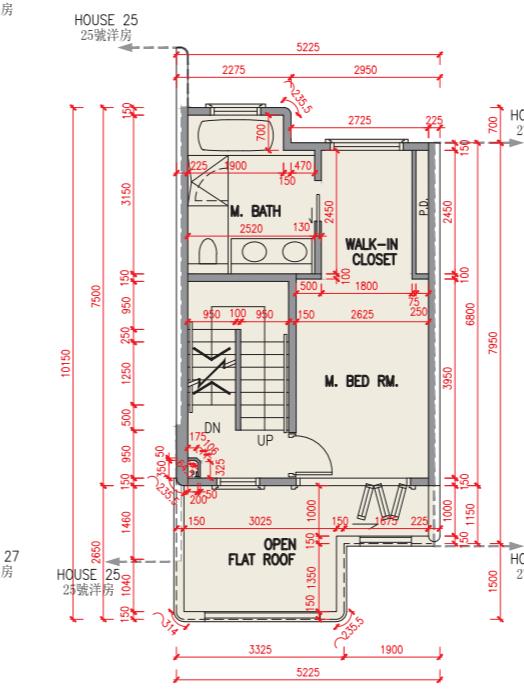
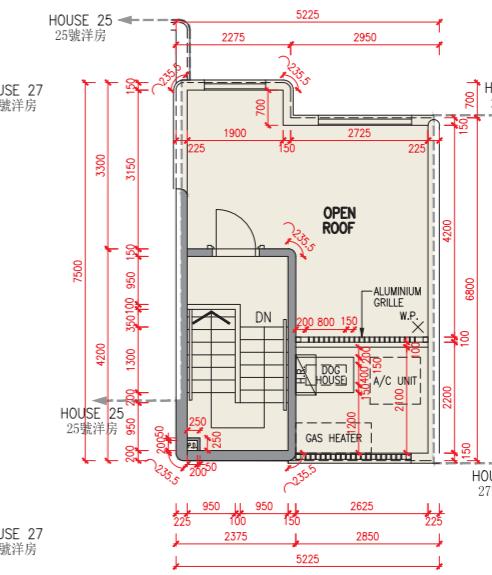
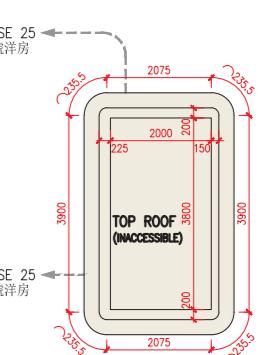
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 25號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 25 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

26號洋房 House 26

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

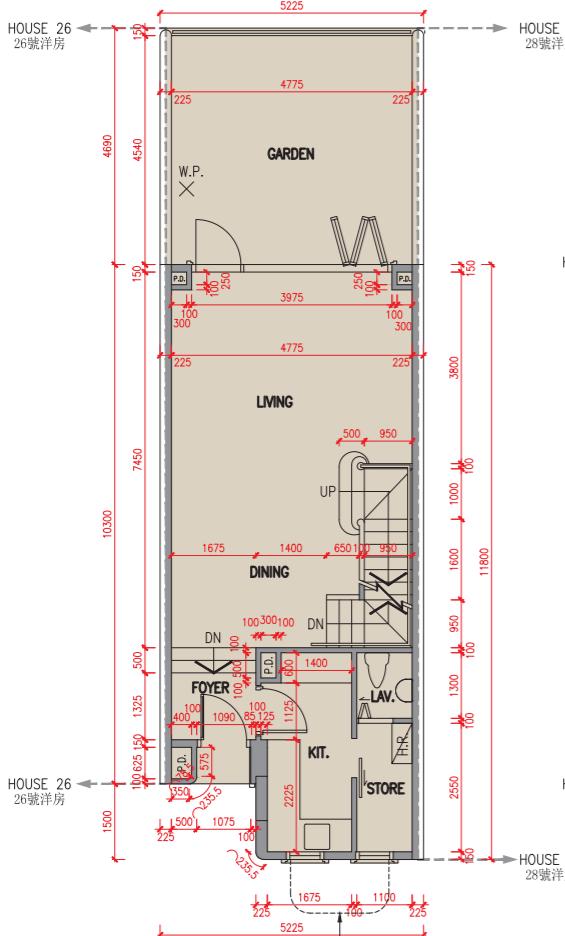
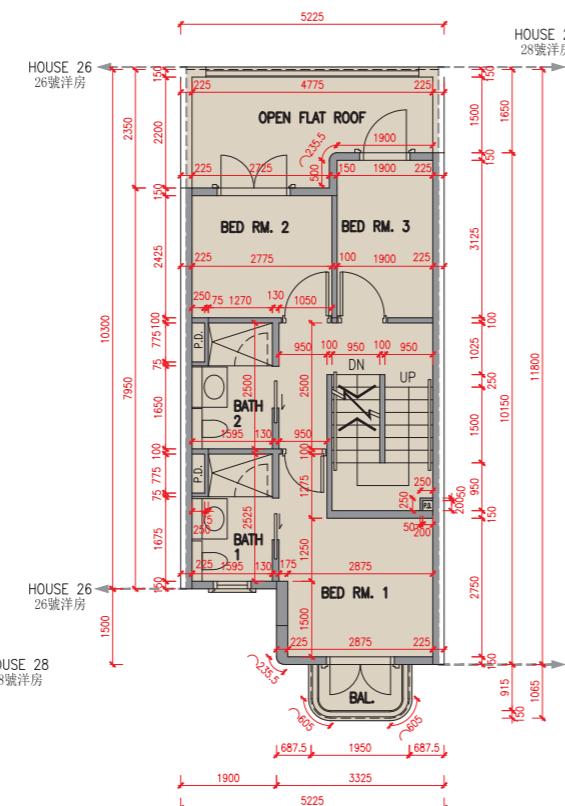
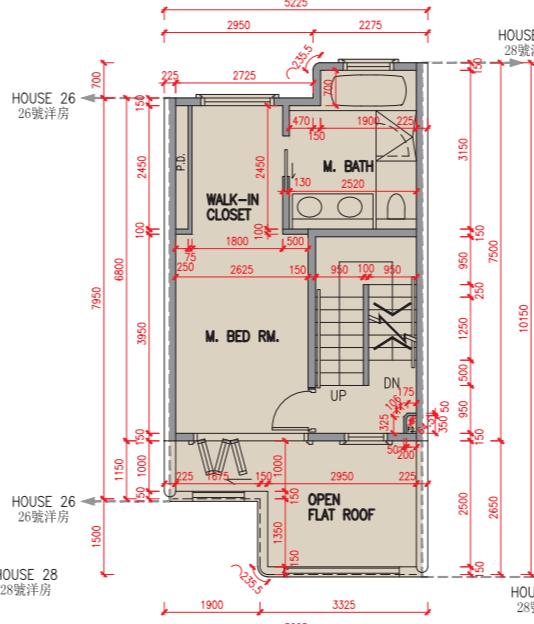
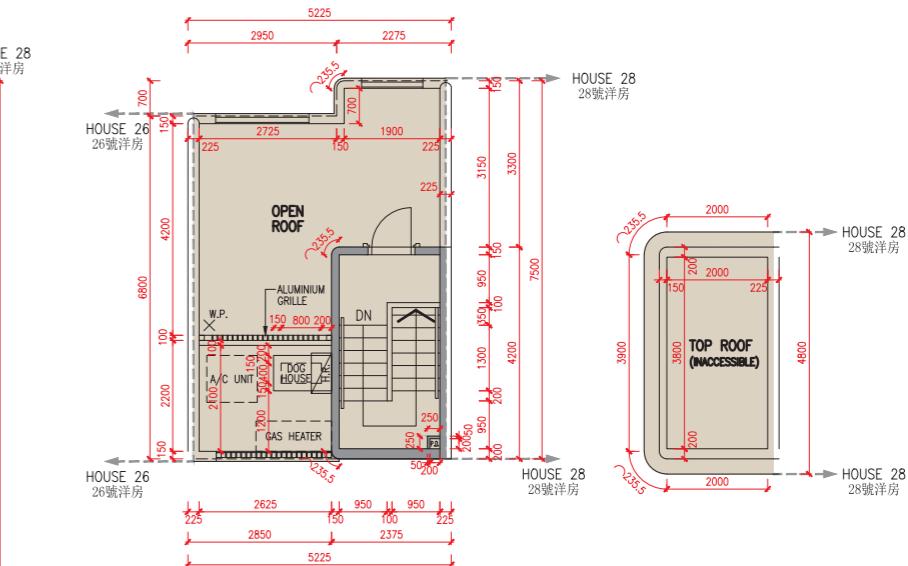
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 26號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 26 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

27號洋房 House 27

地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

比例 0米/M
Scale 0m/M

5米/M

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

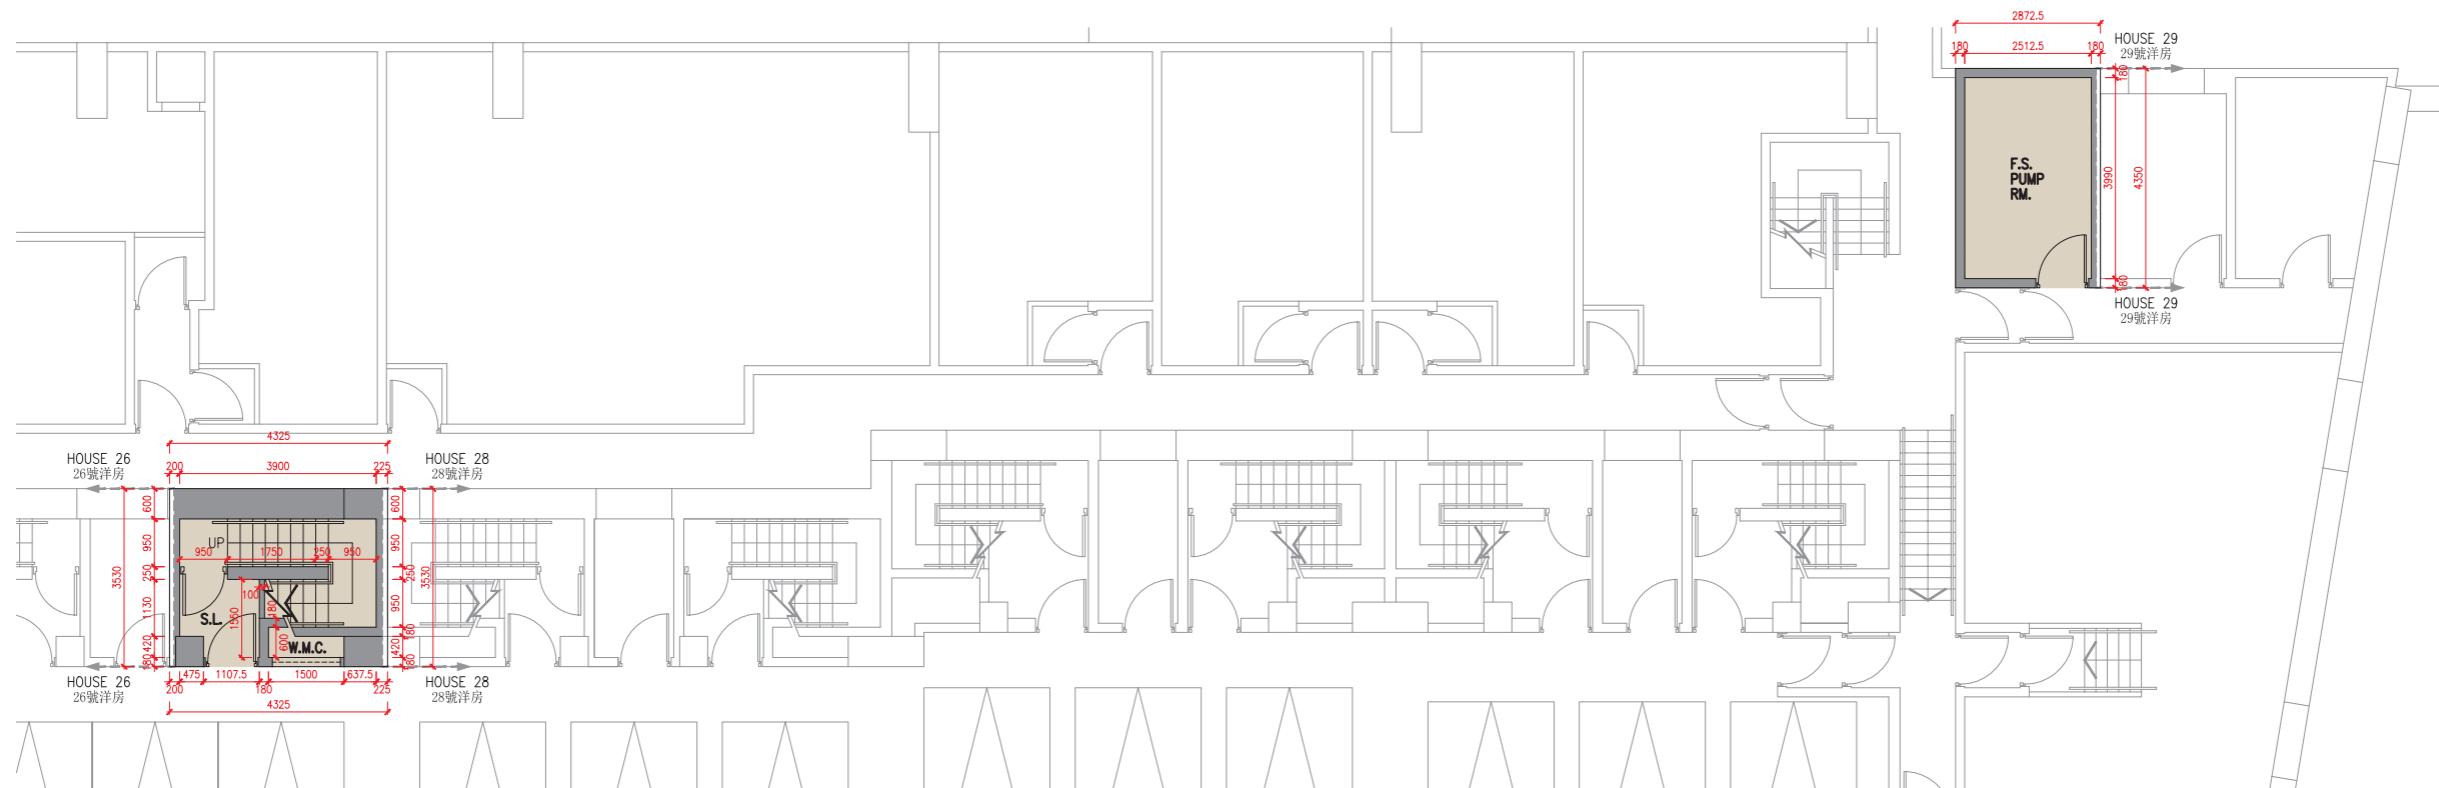
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 27號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 27 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

27號洋房 House 27

地庫平面圖
B/F Plan

比例 Scale 0米/M 5米/M
N

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

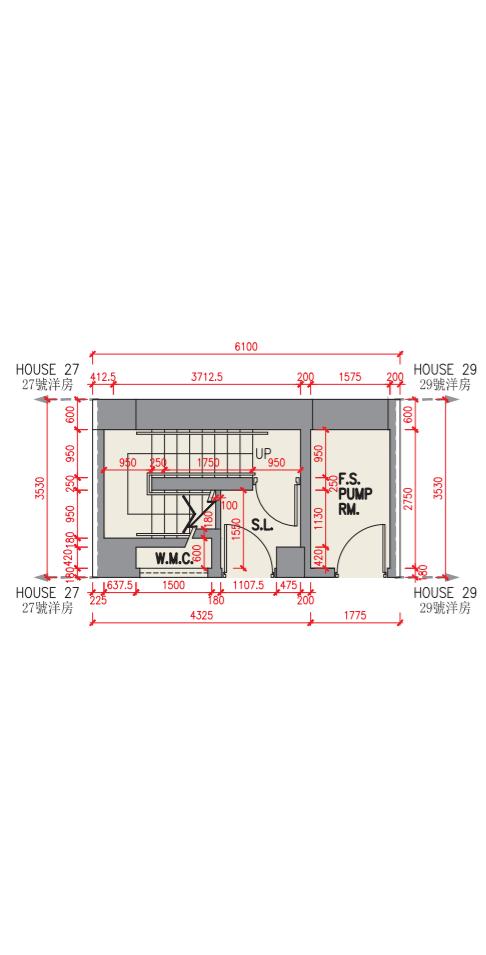
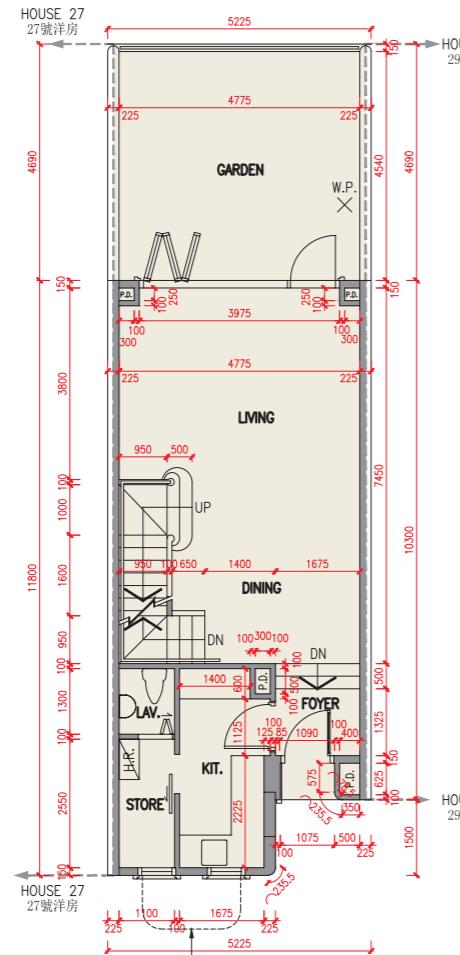
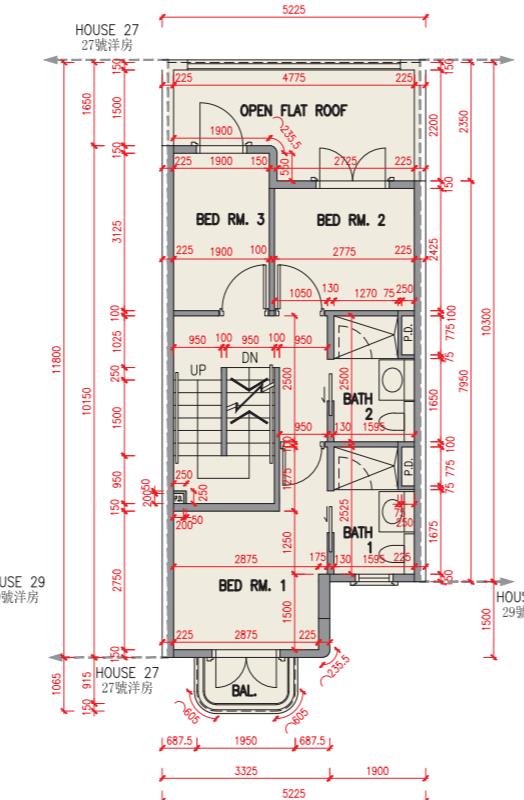
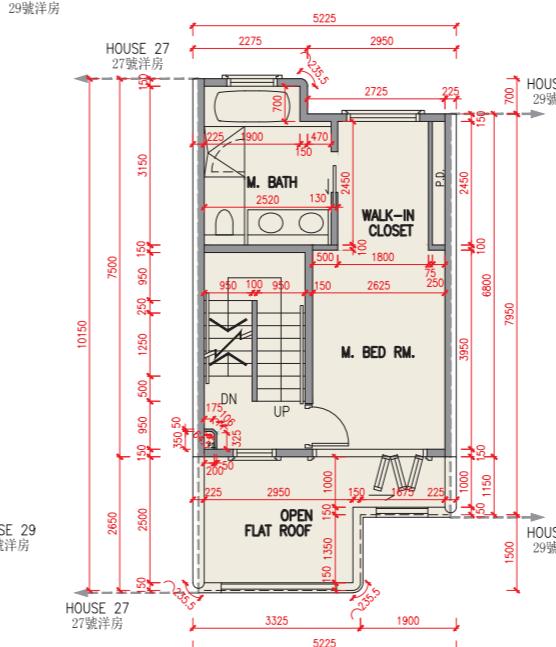
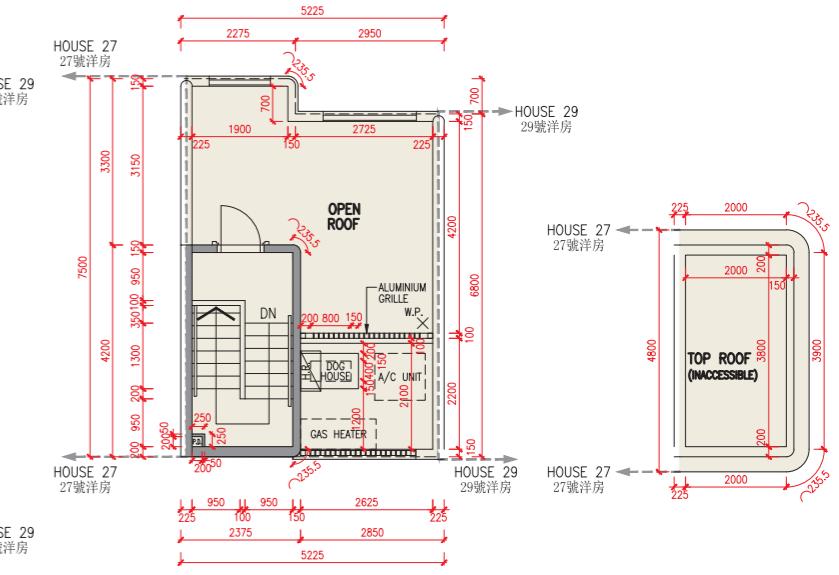
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 27號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 27 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

28號洋房 House 28

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 28號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

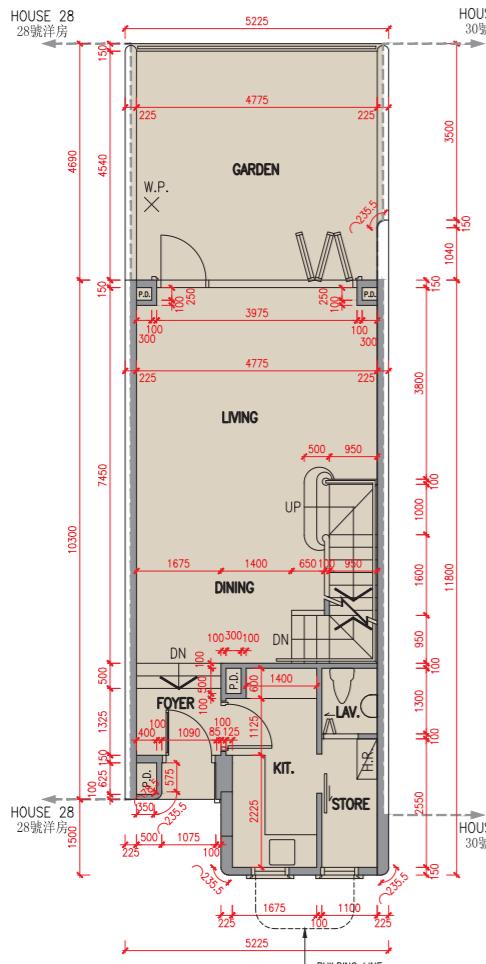
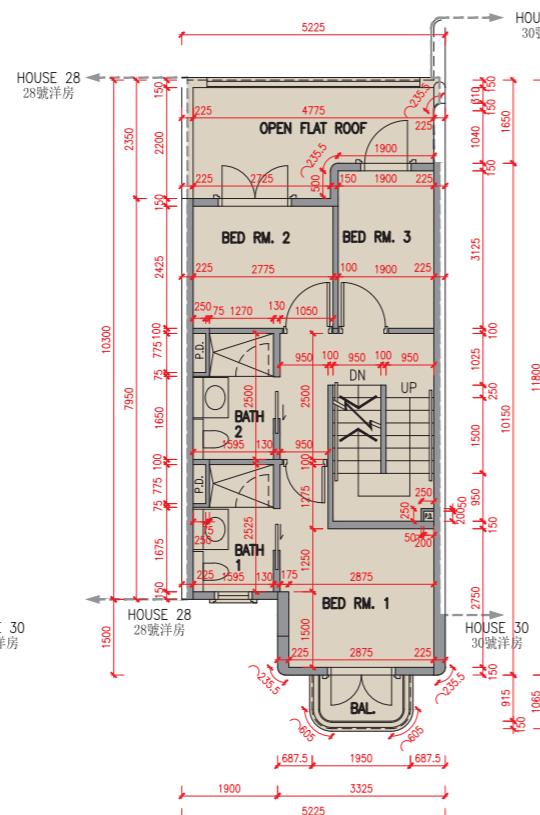
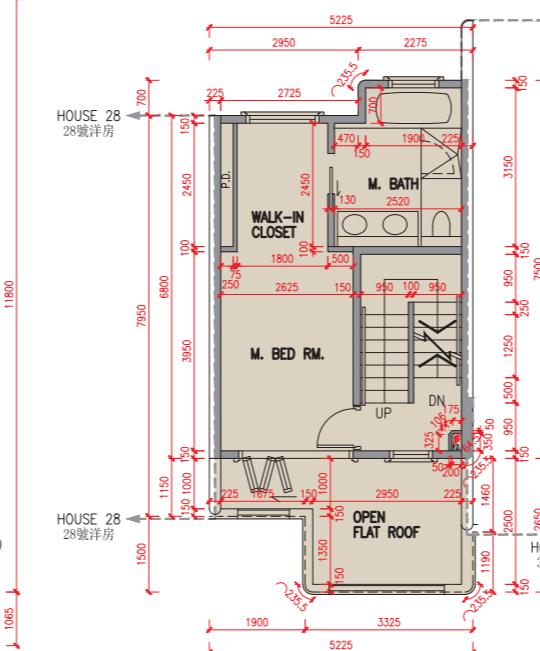
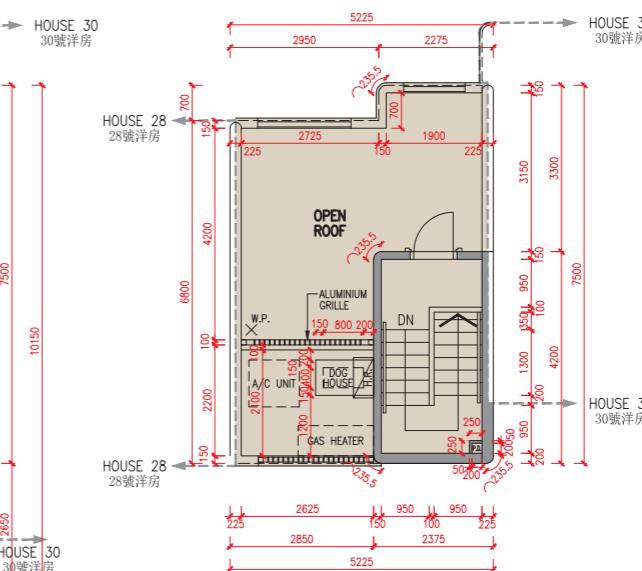
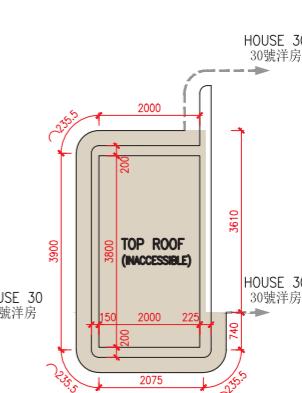
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 28 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

29號洋房 House 29

地下平面圖
G/F Plan一樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 29號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

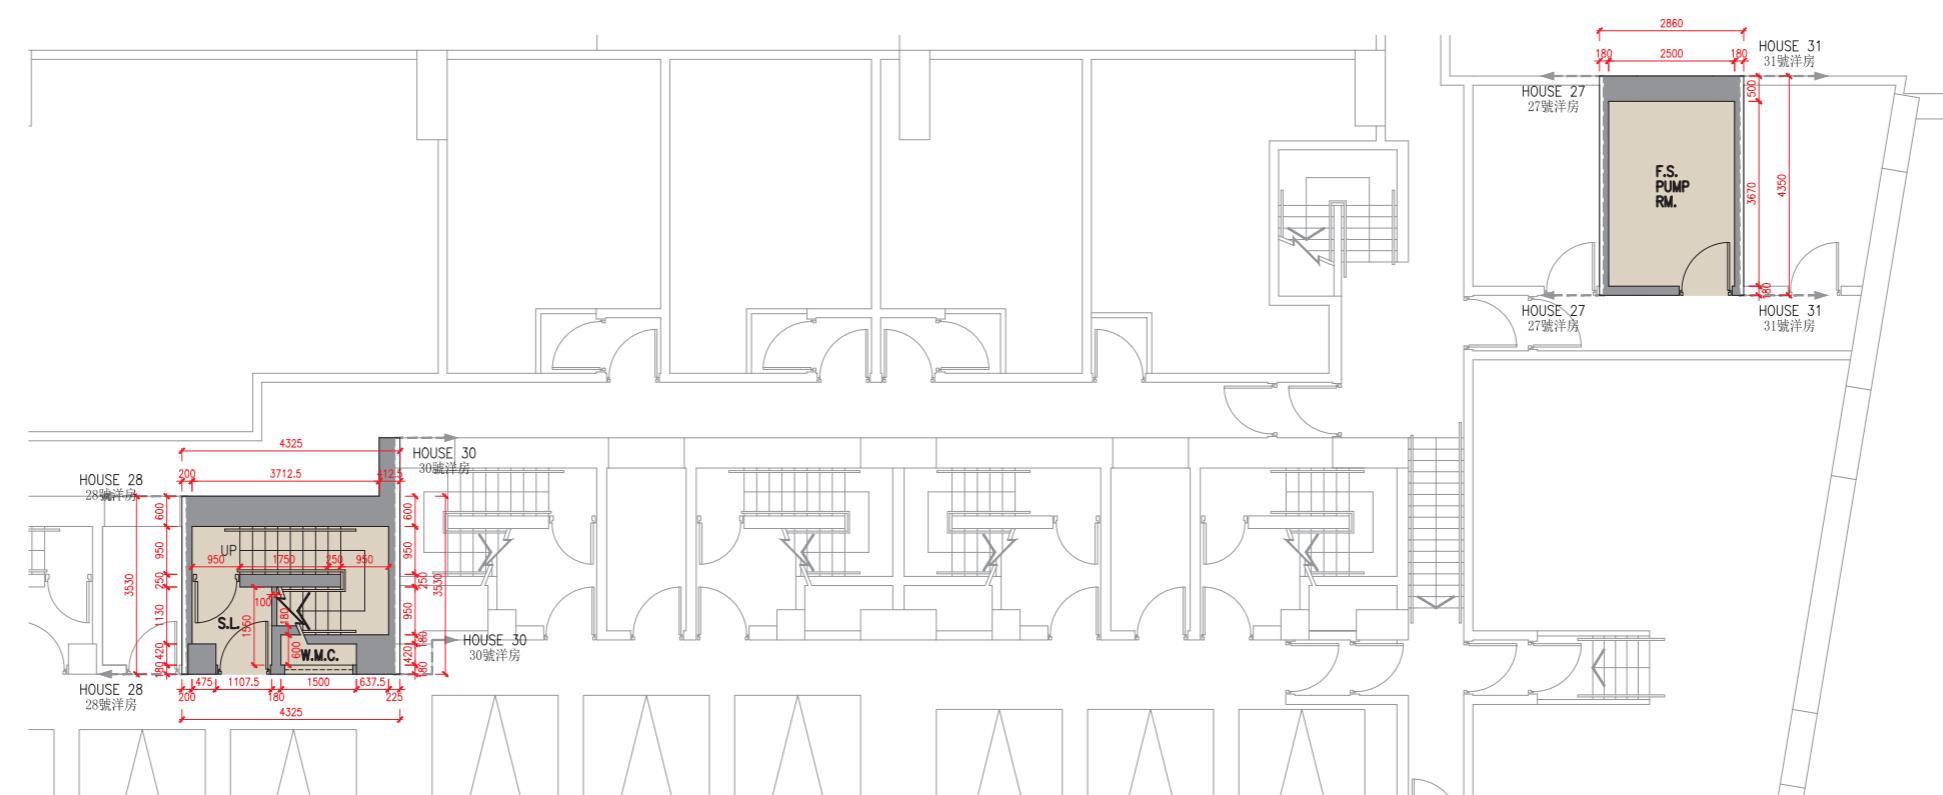
Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 29 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.



29號洋房 House 29

地庫平面
B/F Pla



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度（毫米） Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度（毫米） Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較樓層的內部面積，一般比較低樓層的內部面積大。（不適用）

備註

- 備註：

 - 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸
 - 29號洋房的空調機室外機安裝於此洋房天台上。
 - 每個住宅物業的層與層之間的高度指該樓層之石屎地台面上一層石屎地台面之高度距離。
 - 每個住宅物業的樓板的厚度不包括灰泥。

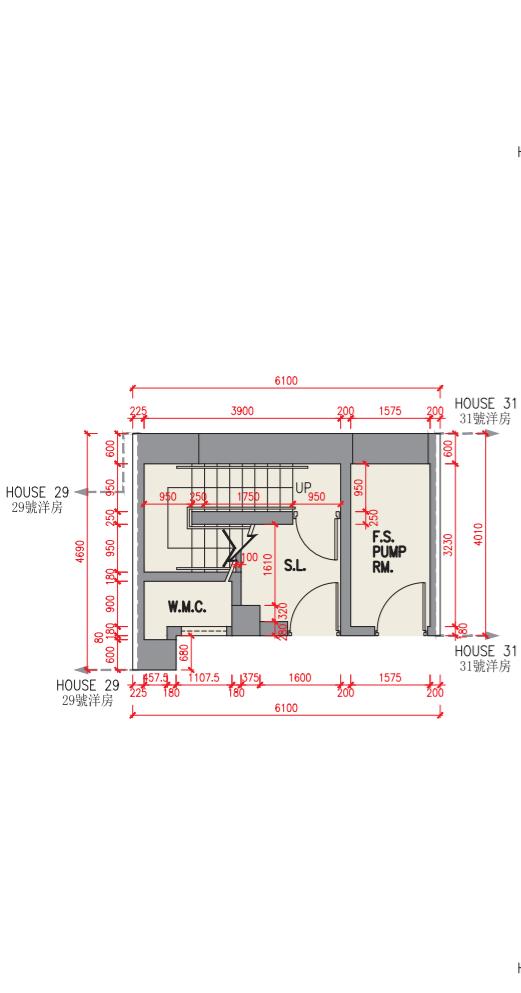
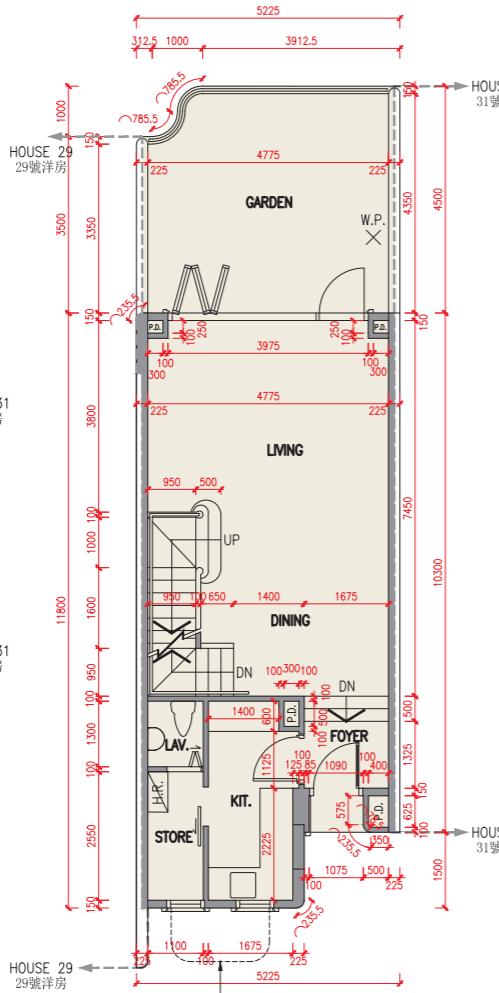
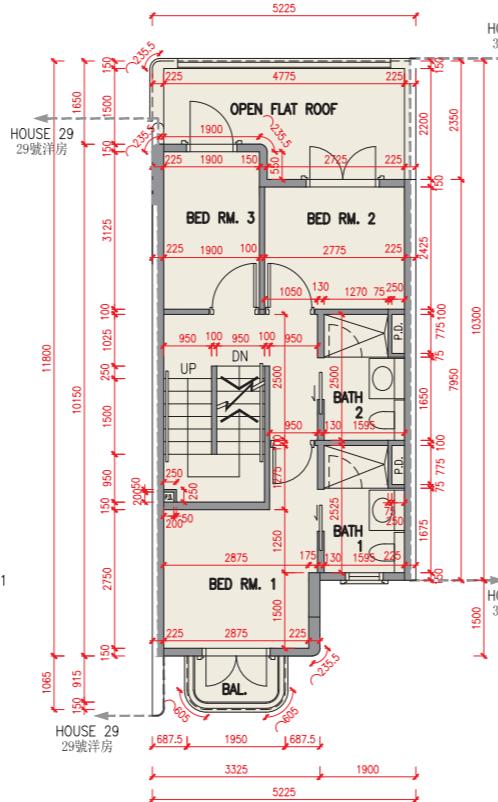
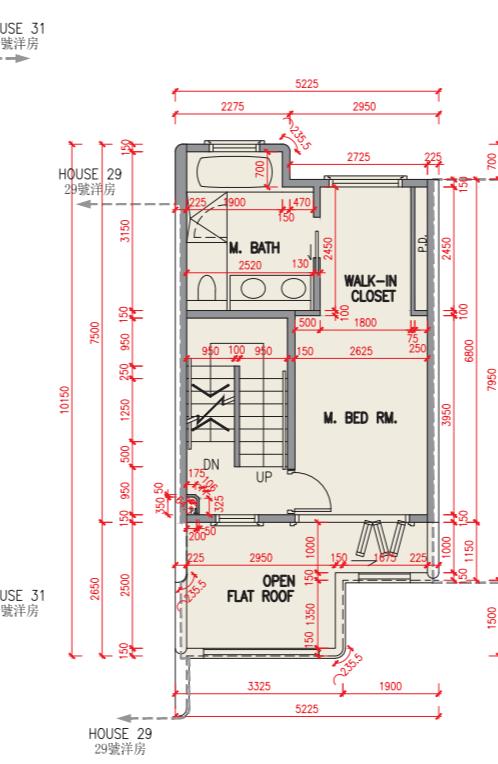
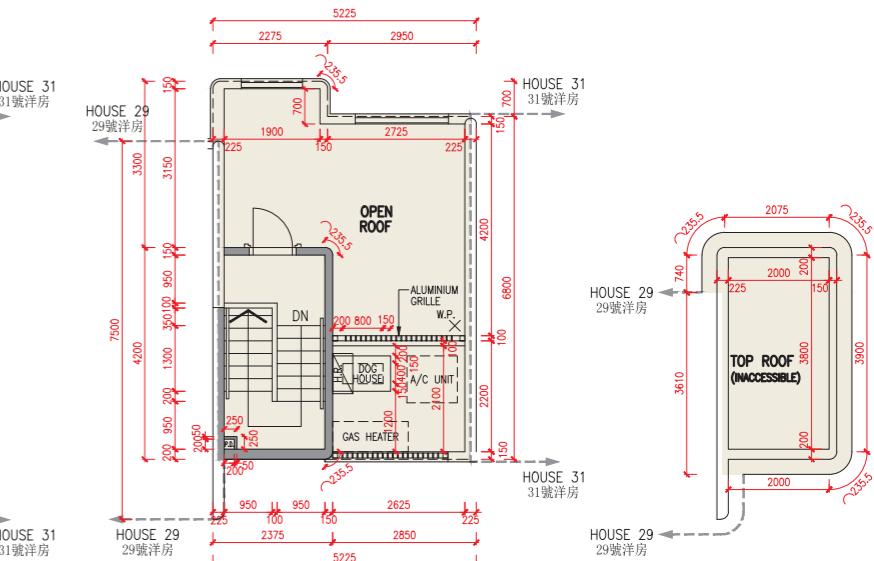
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Note

- Notes.

 1. The dimensions in the floor plans are all structural dimensions in millimetre.
 2. The air-conditioning outdoor unit(s) for House 29 is/are located on the roof of the House.
 3. The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
 4. The thickness of the floor slabs excludes plaster of each residential property.

30號洋房 House 30

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan

比例 0米/M
Scale 0m/M

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 30號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

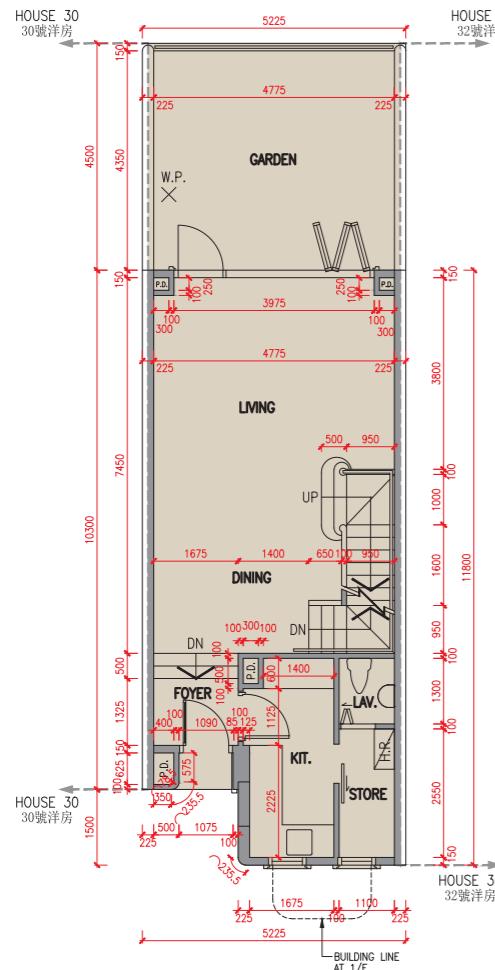
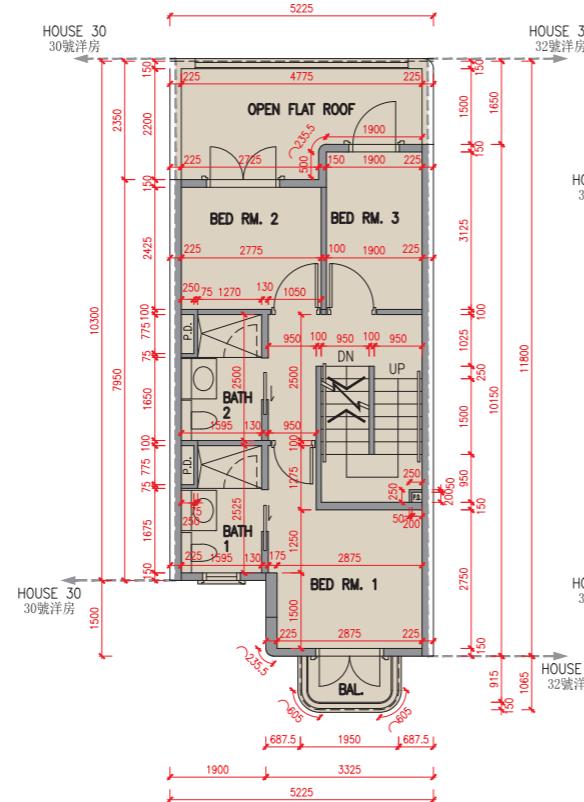
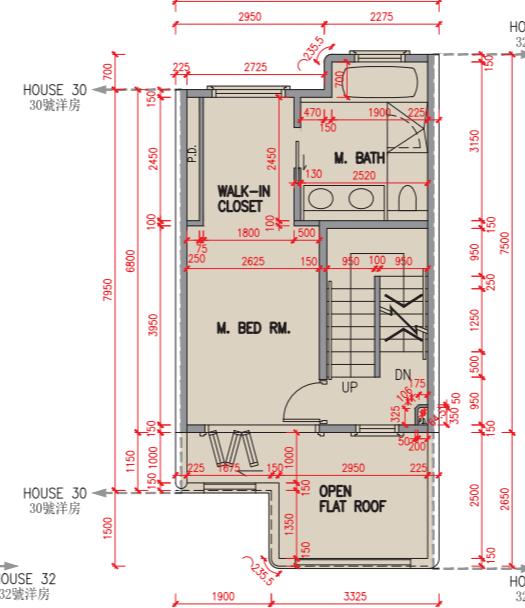
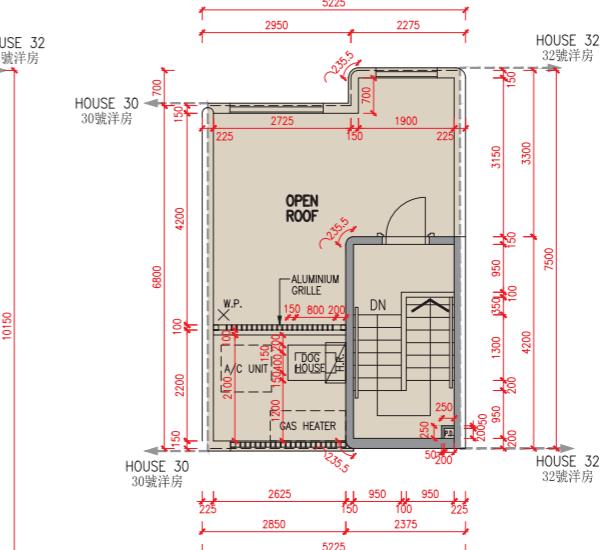

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 30 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

31號洋房 House 31

地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale 0m/M

5米/M

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 31號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

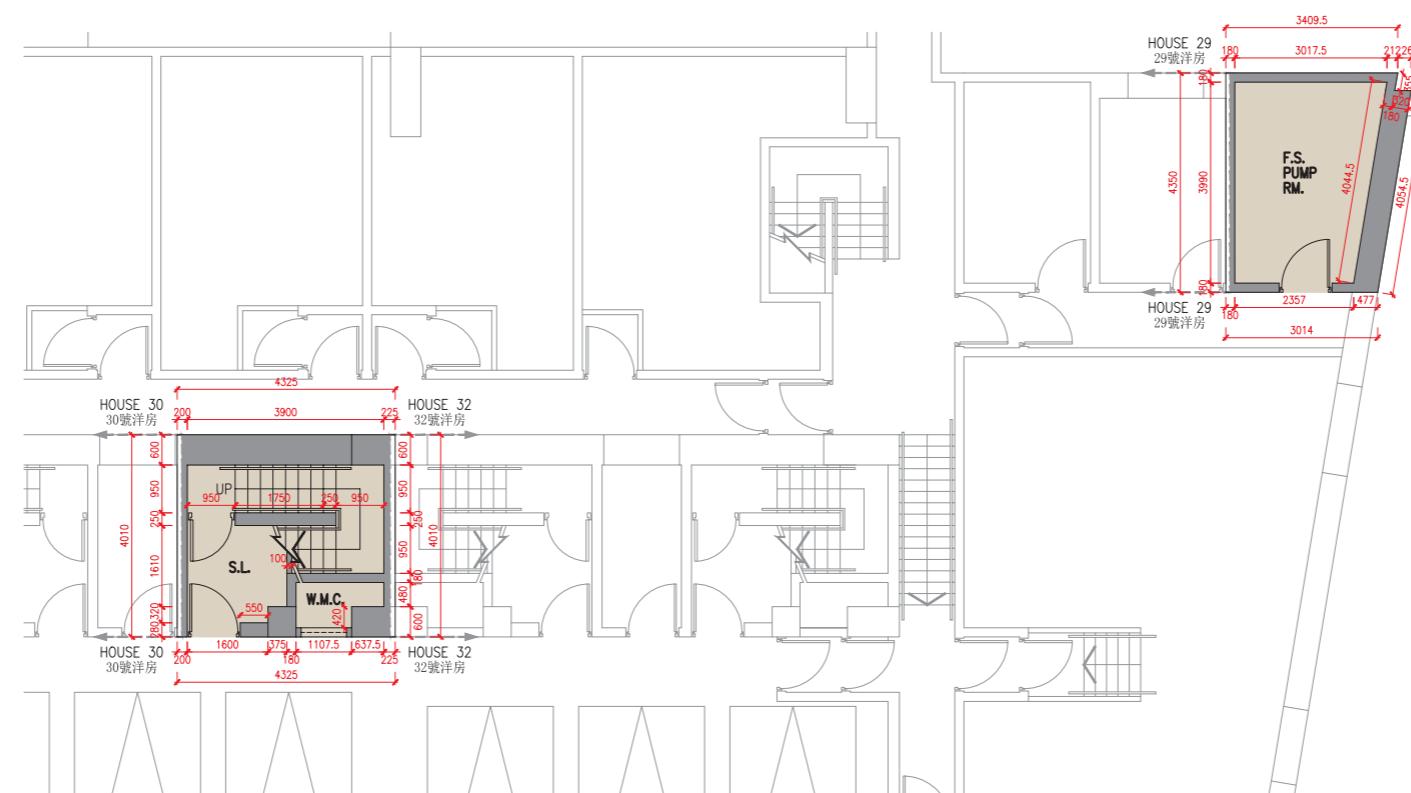
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 31 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

31號洋房 House 31

地庫平面
B/F Plan



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度（毫米） Floor-to-floor height (mm)	7250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度（毫米） Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積和大。（不適用）

備註

- 備註：

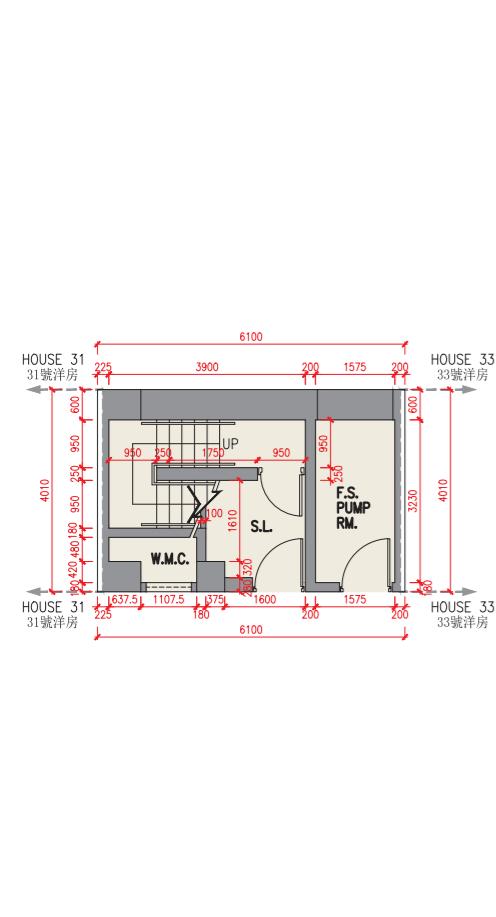
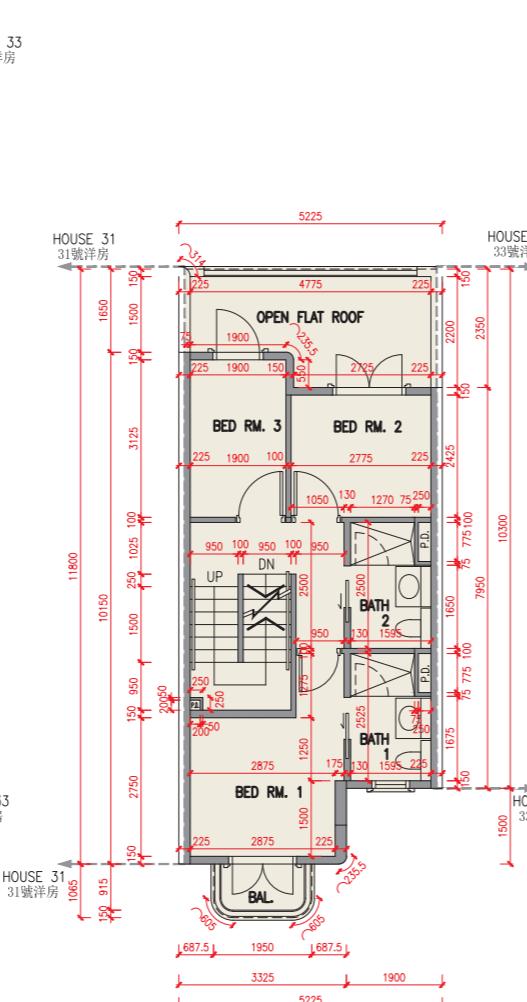
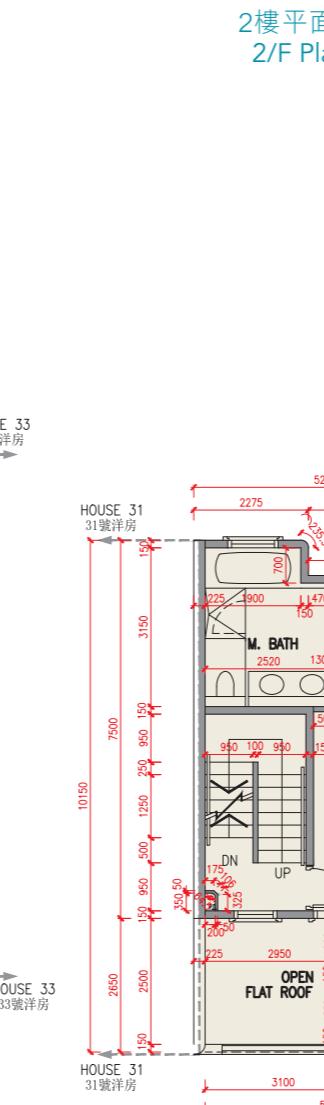
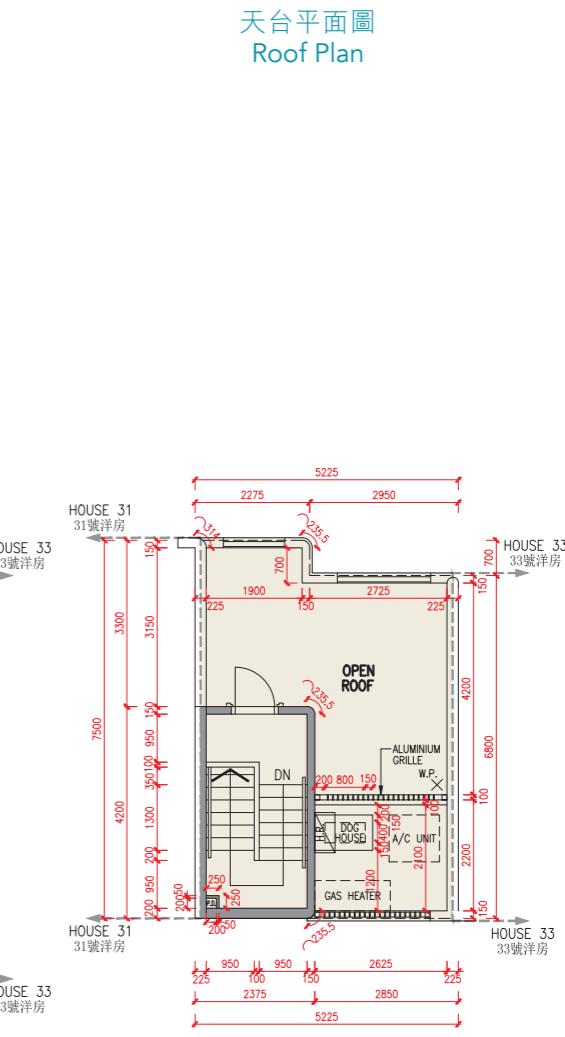
 1. 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
 2. 31號洋房的空調機室外機安裝於此洋房天台上。
 3. 每個住家物業的層與層之間的高度指該樓層之石屎地台面上一層石屎地台面之高度距離。
 4. 每個住家物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
 2. The air-conditioning outdoor unit(s) for House 31 is/are located on the roof of the House.
 3. The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
 4. The thickness of the floor slabs excludes plaster of each residential property.

32號洋房 House 32

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 32號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

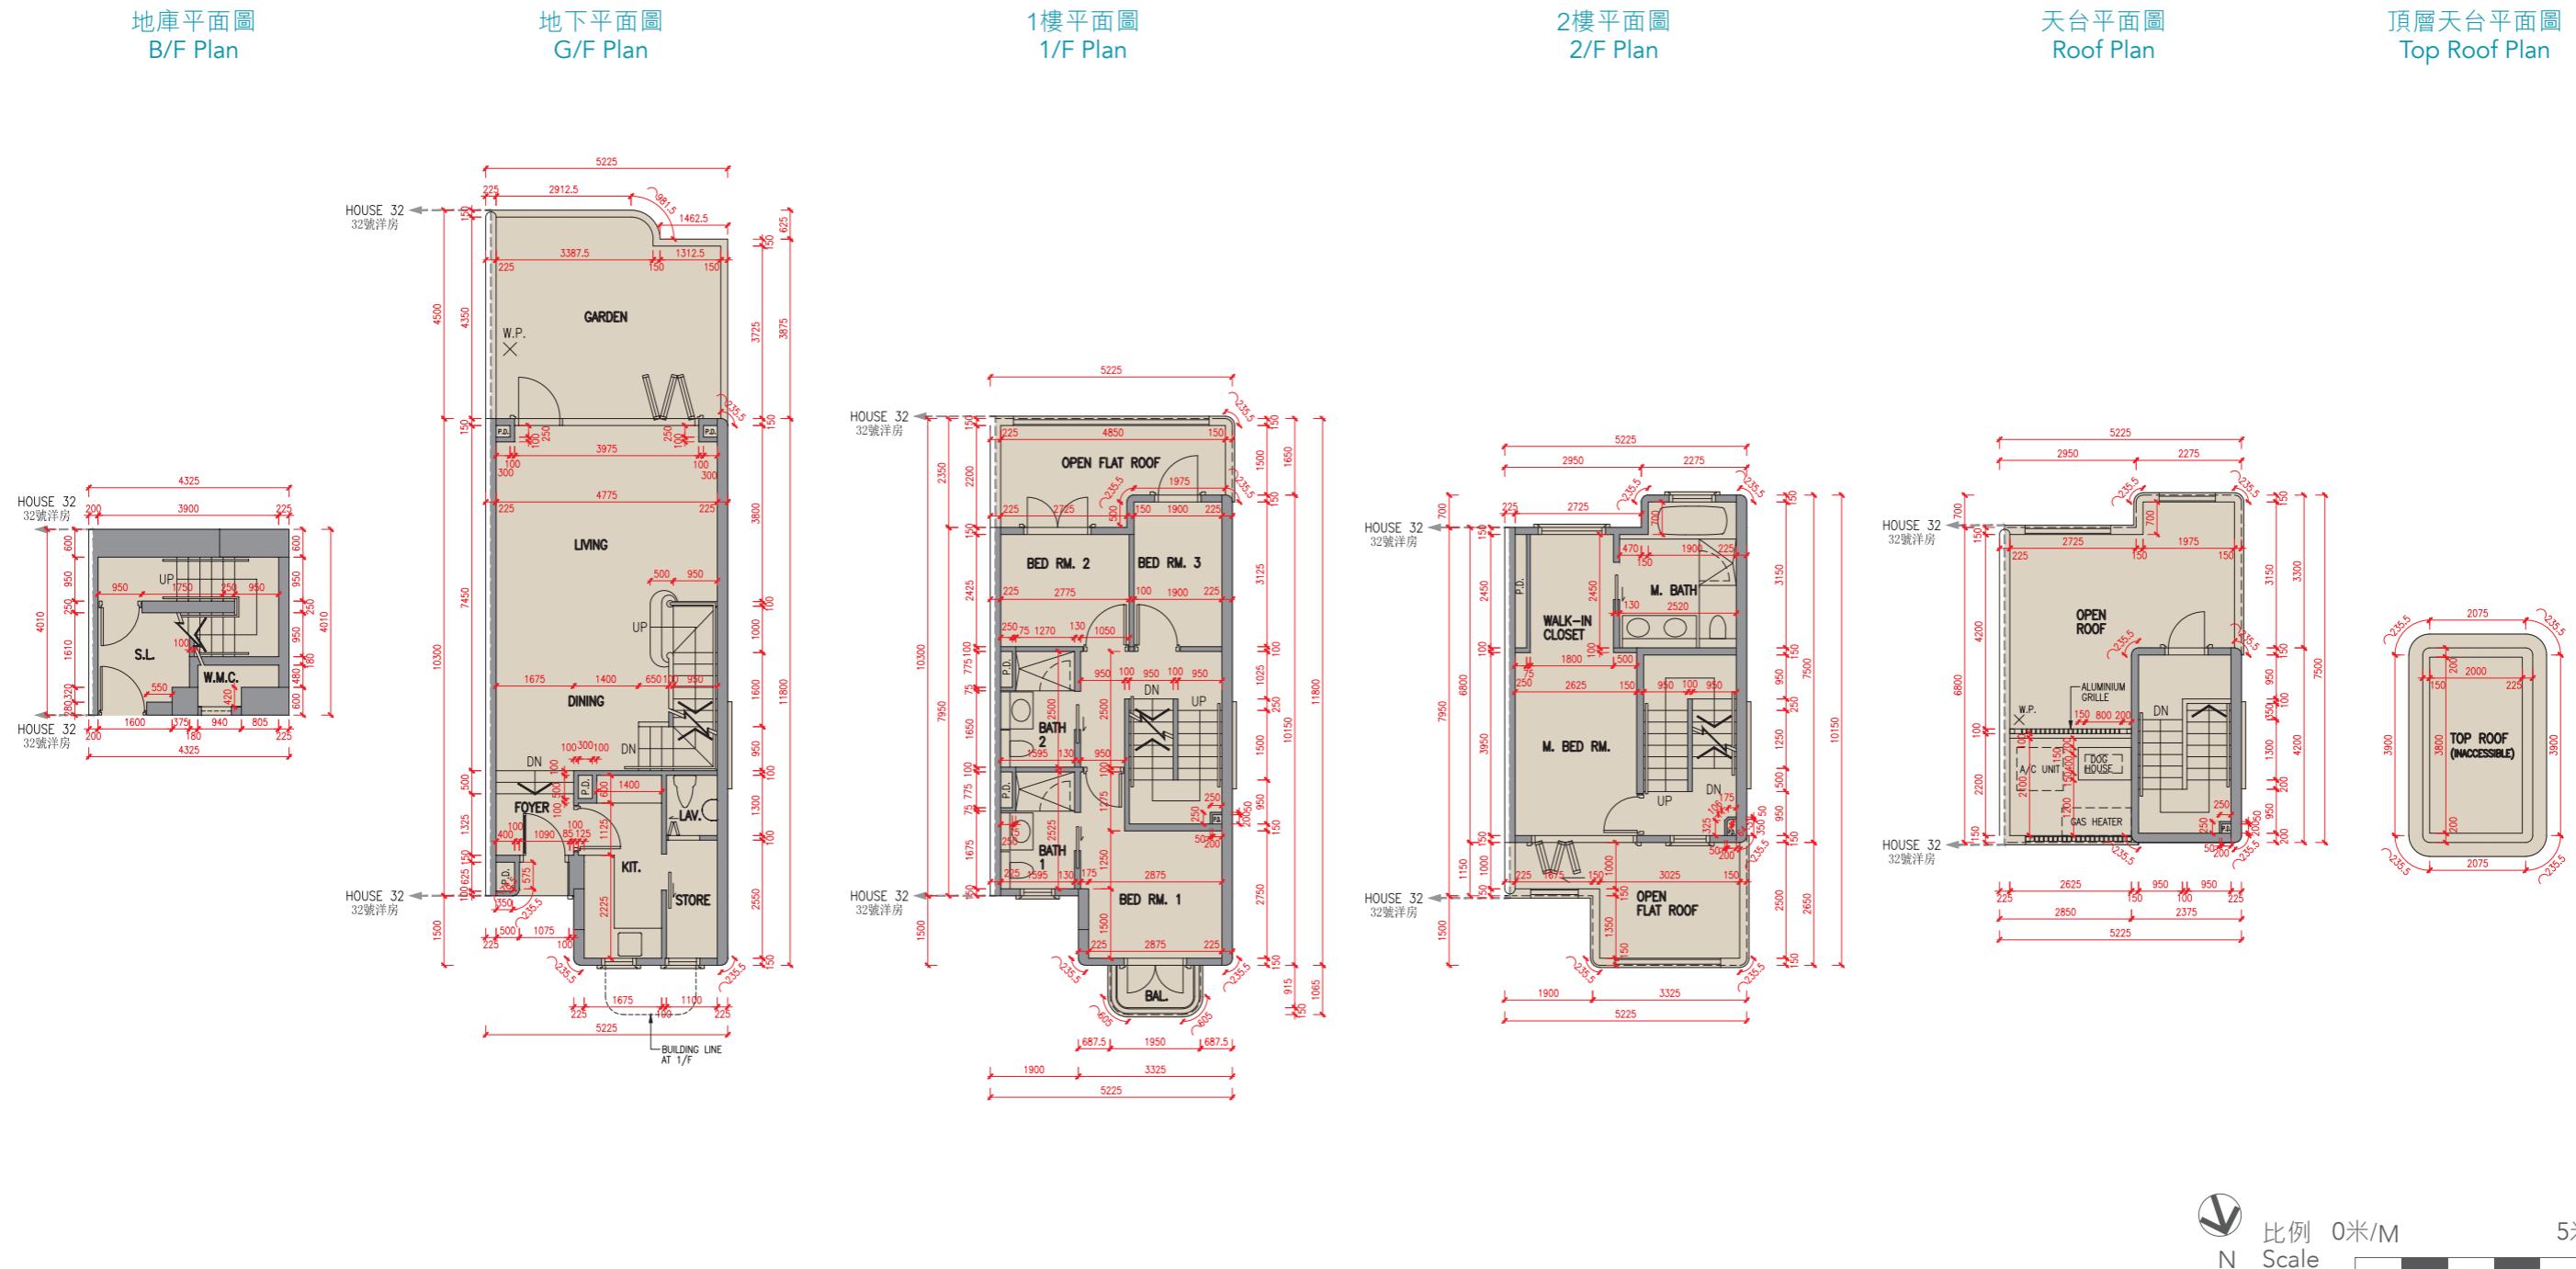
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 32 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度（毫米） Floor-to-floor height (mm)	6250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度（毫米） Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

33號洋房 House 33



樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	6250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 33號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:


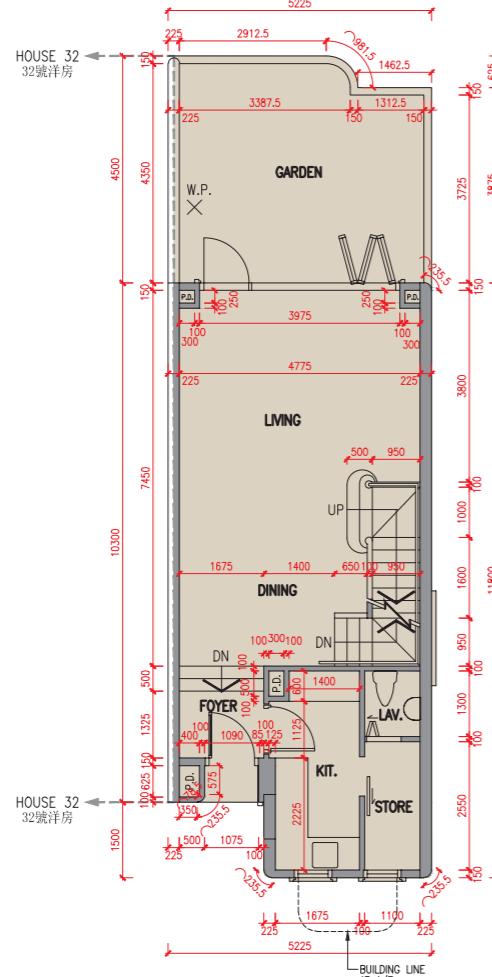
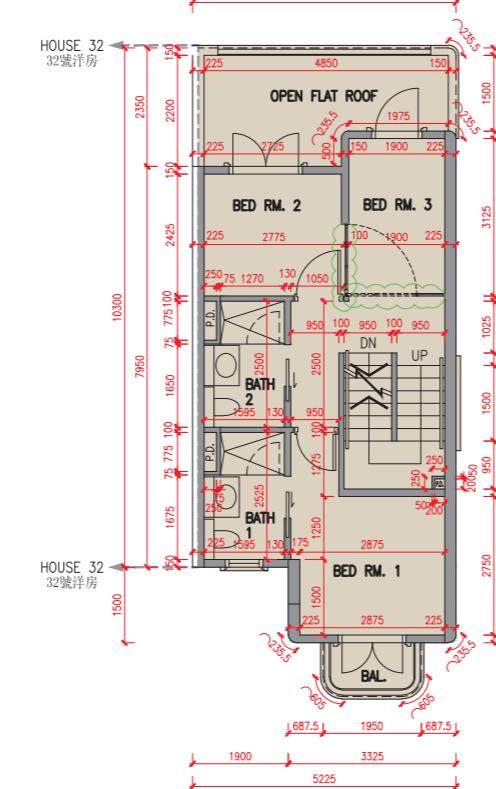
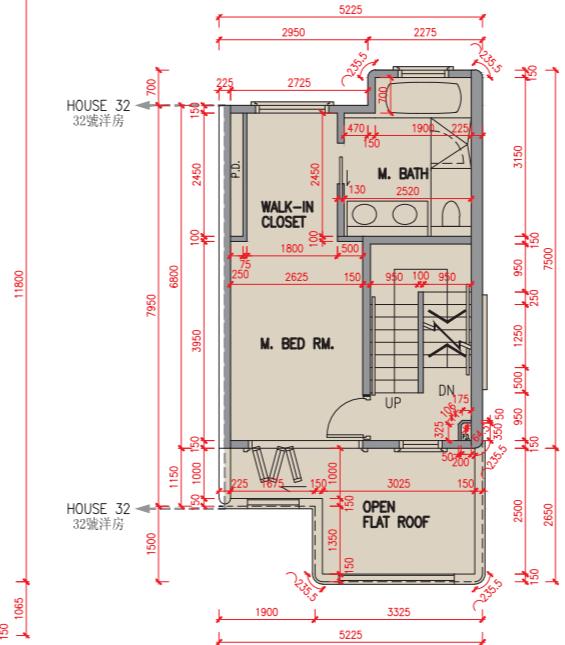
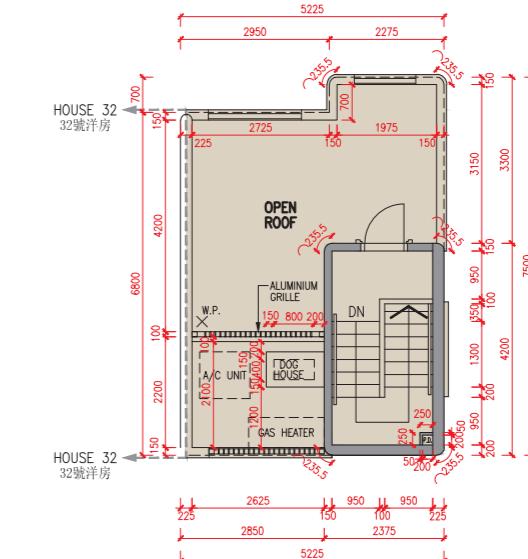

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 33 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

33號洋房 House 33

現狀平面圖 Floor Plan In "As-Is" Layout

33號洋房之睡房3的門及部分牆身已被修改，請見綠色標記所示。認可人士證明所修改的部分是根據建築物條例第41(3)條所獲豁免的建築工程及無須修訂建築圖則。

The door and part of the wall of Bedroom 3, House 33 has been altered, please refer to the position marked in green. The Authorised Person certified that such alteration is exempted building works under Section 41(3) of the Building Ordinance and no revision to the General Building Plans is required.

地庫平面圖
B/F Plan地下平面圖
G/F Plan1樓平面圖
1/F Plan2樓平面圖
2/F Plan天台平面圖
Roof Plan頂層天台平面圖
Top Roof Plan比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 33號洋房的空調機室外機安裝於此洋房天台上。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

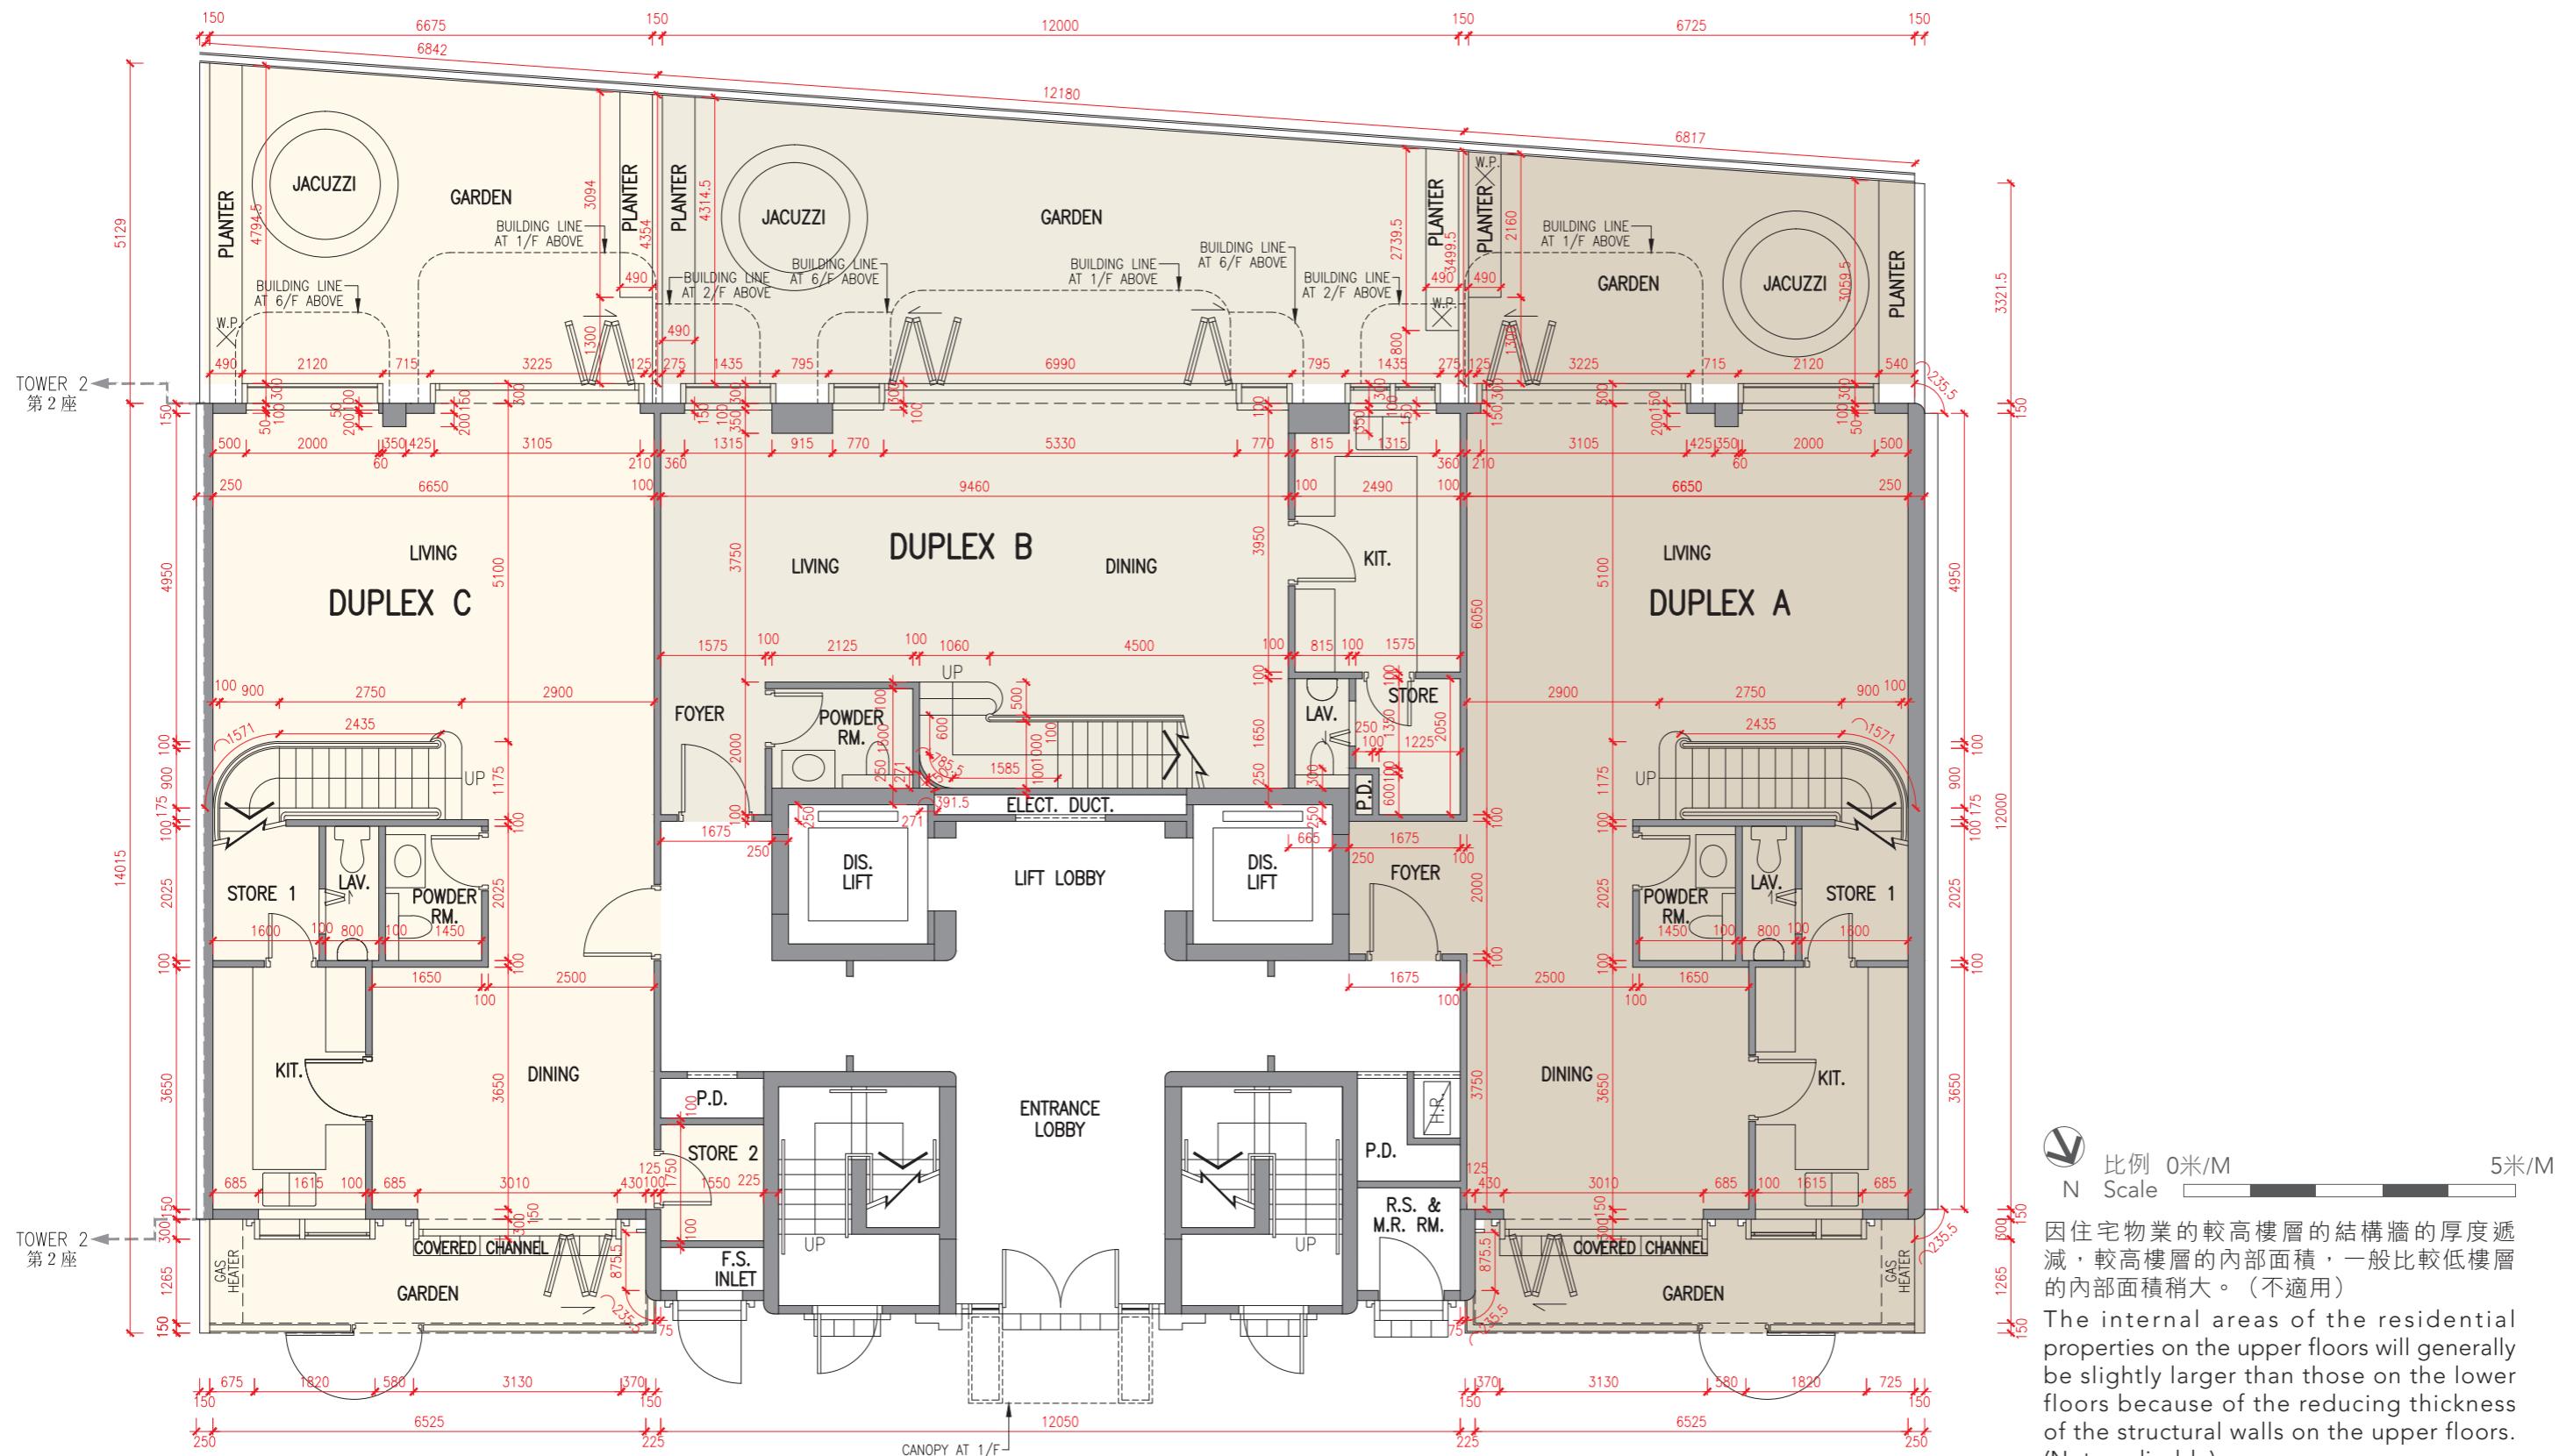
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The air-conditioning outdoor unit(s) for House 33 is/are located on the roof of the House.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

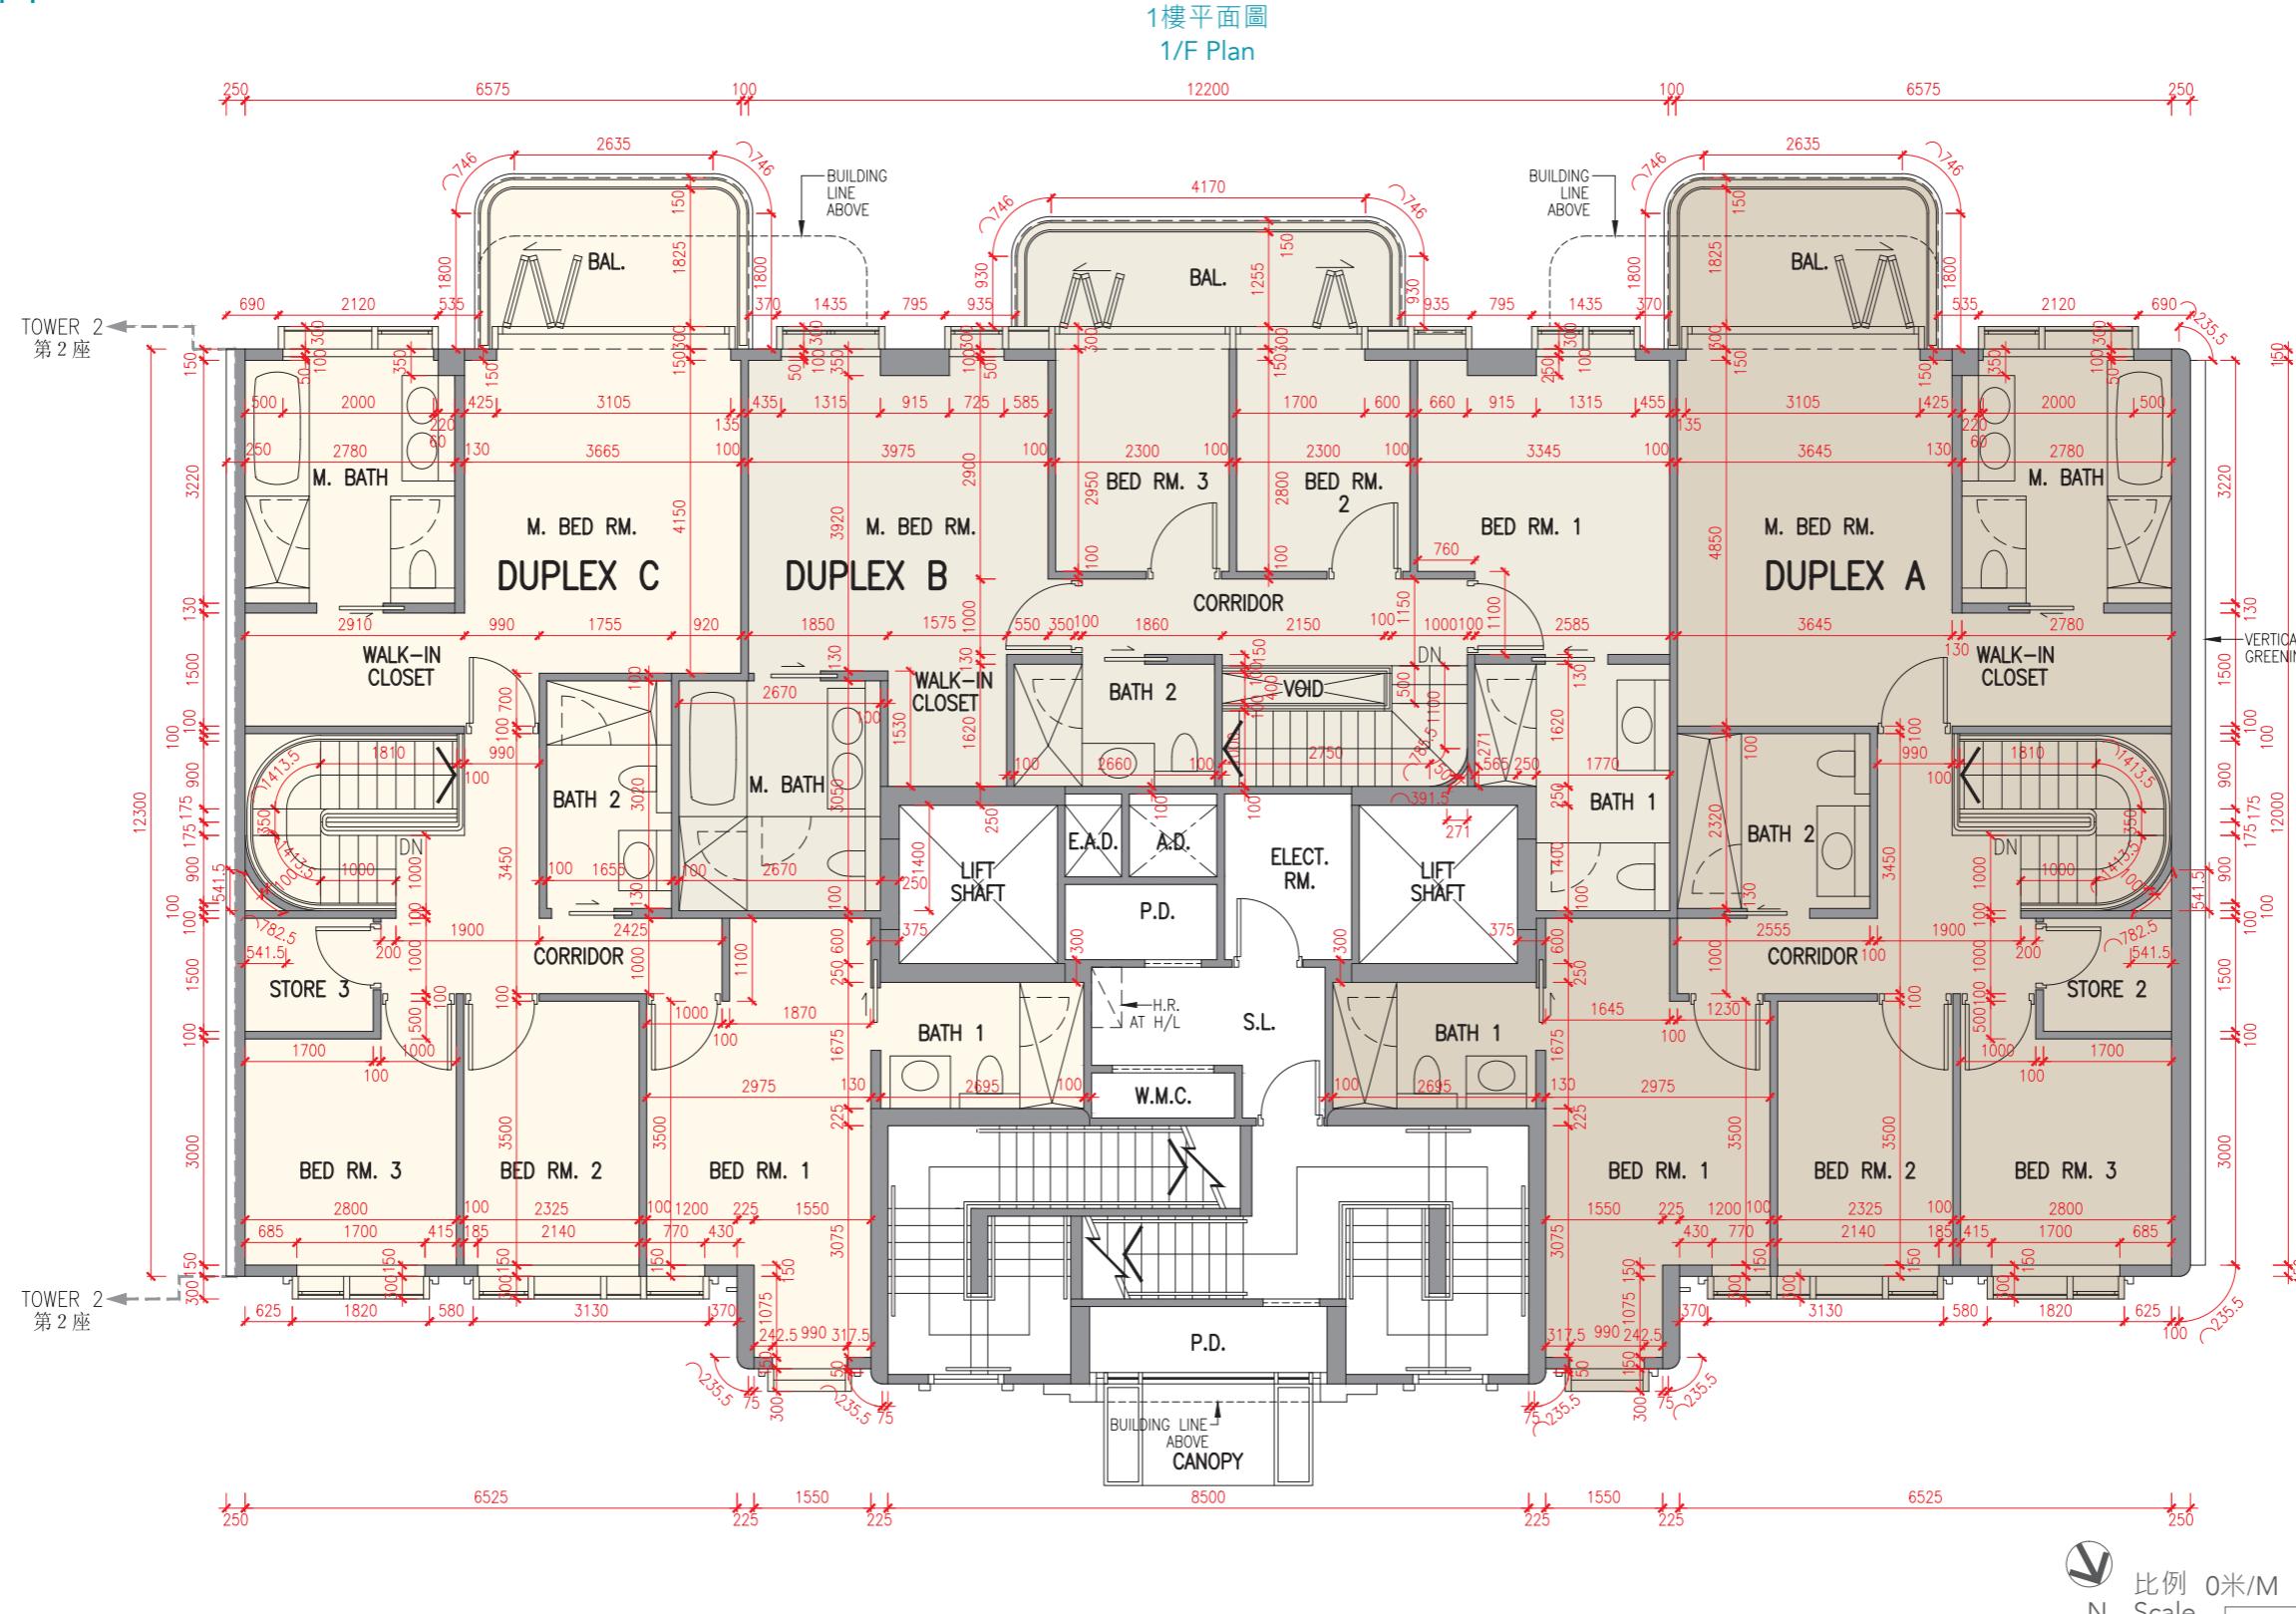
樓層 Floor	地庫 B/F	地下 G/F	1樓 1/F	2樓 2/F	天台 Roof	頂層天台 Top Roof
層與層之間的高度 (毫米) Floor-to-floor height (mm)	6250	4000, 4400	3500	3500	2350	不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)	250	200	150	150, 300	150	

第1座 Tower 1

地下平面圖
G/F Plan

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	C複式單位 Duplex C
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第1座 Tower 1	地下 G/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				200, 250	200, 225, 250	200, 250

第1座 Tower 1



	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	C複式單位 Duplex C
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第1座 Tower 1	1樓 1/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 200	150, 200	150, 200

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

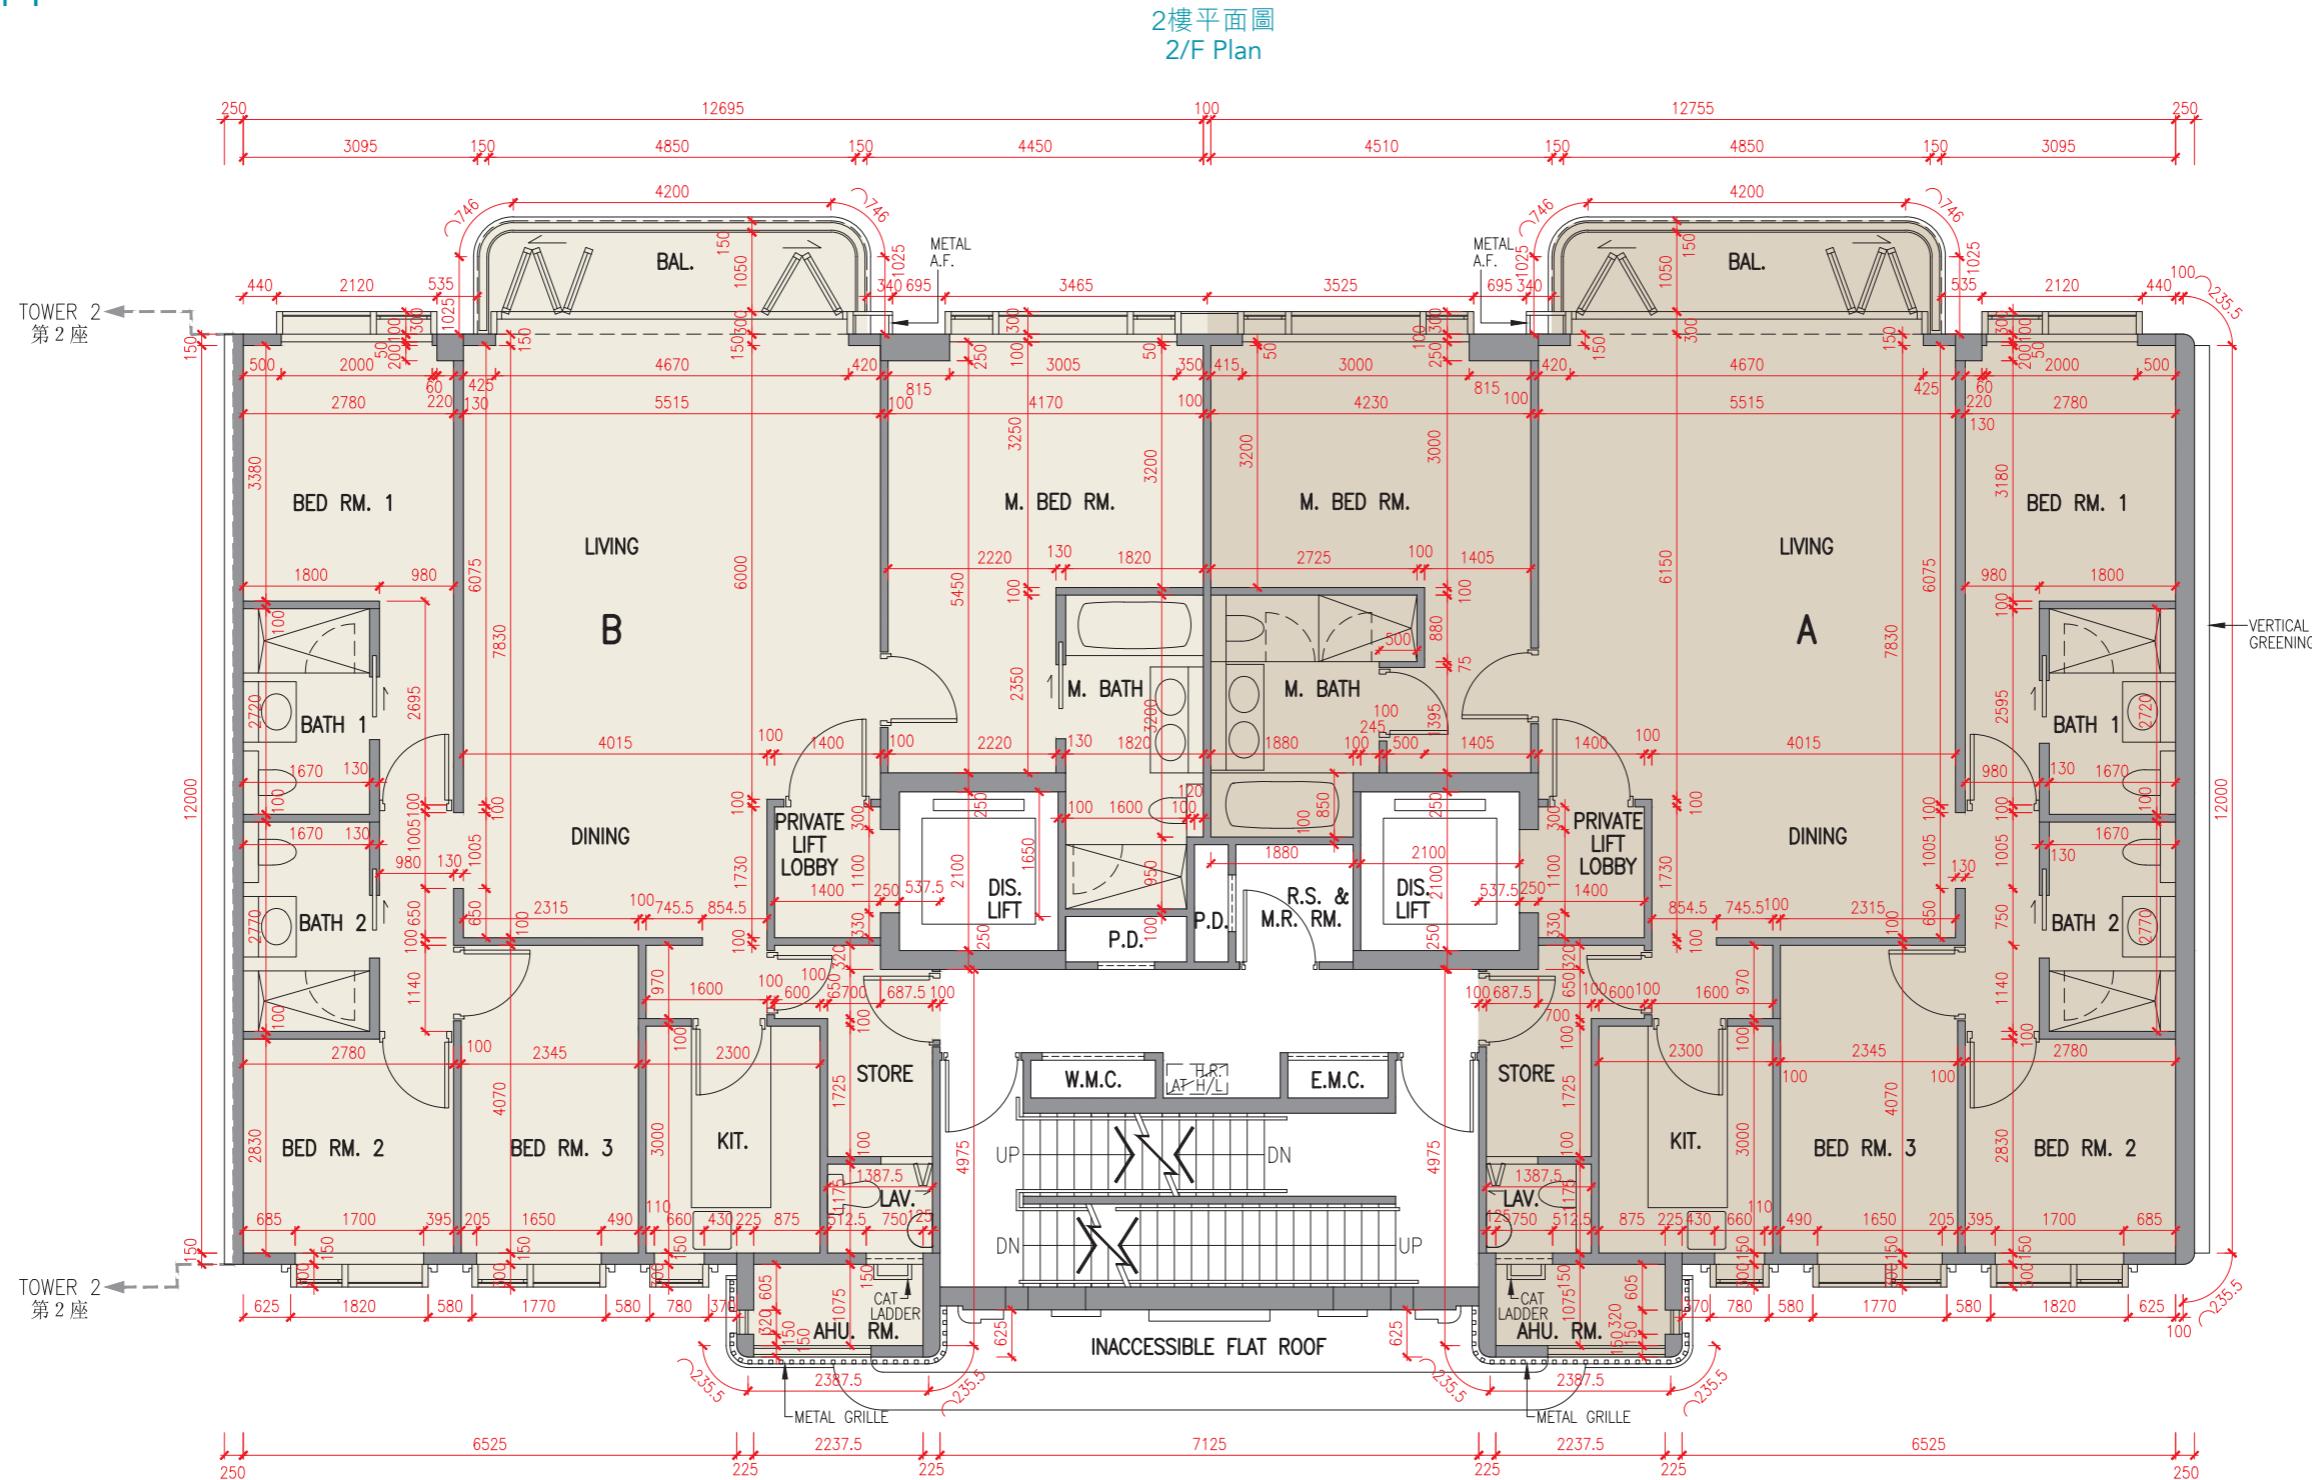
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。
- 第1座地下及1樓A複式單位、B複式單位及C複式單位的空調機室外機安裝於此座天台上。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.
- The air-conditioning outdoor unit(s) for Duplex A, Duplex B and Duplex C on G/F and 1/F of Tower 1 is/are located on the roof of the Tower.

第1座 Tower 1

比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

1. 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
3. 每個住宅物業的樓板的厚度不包括灰泥。

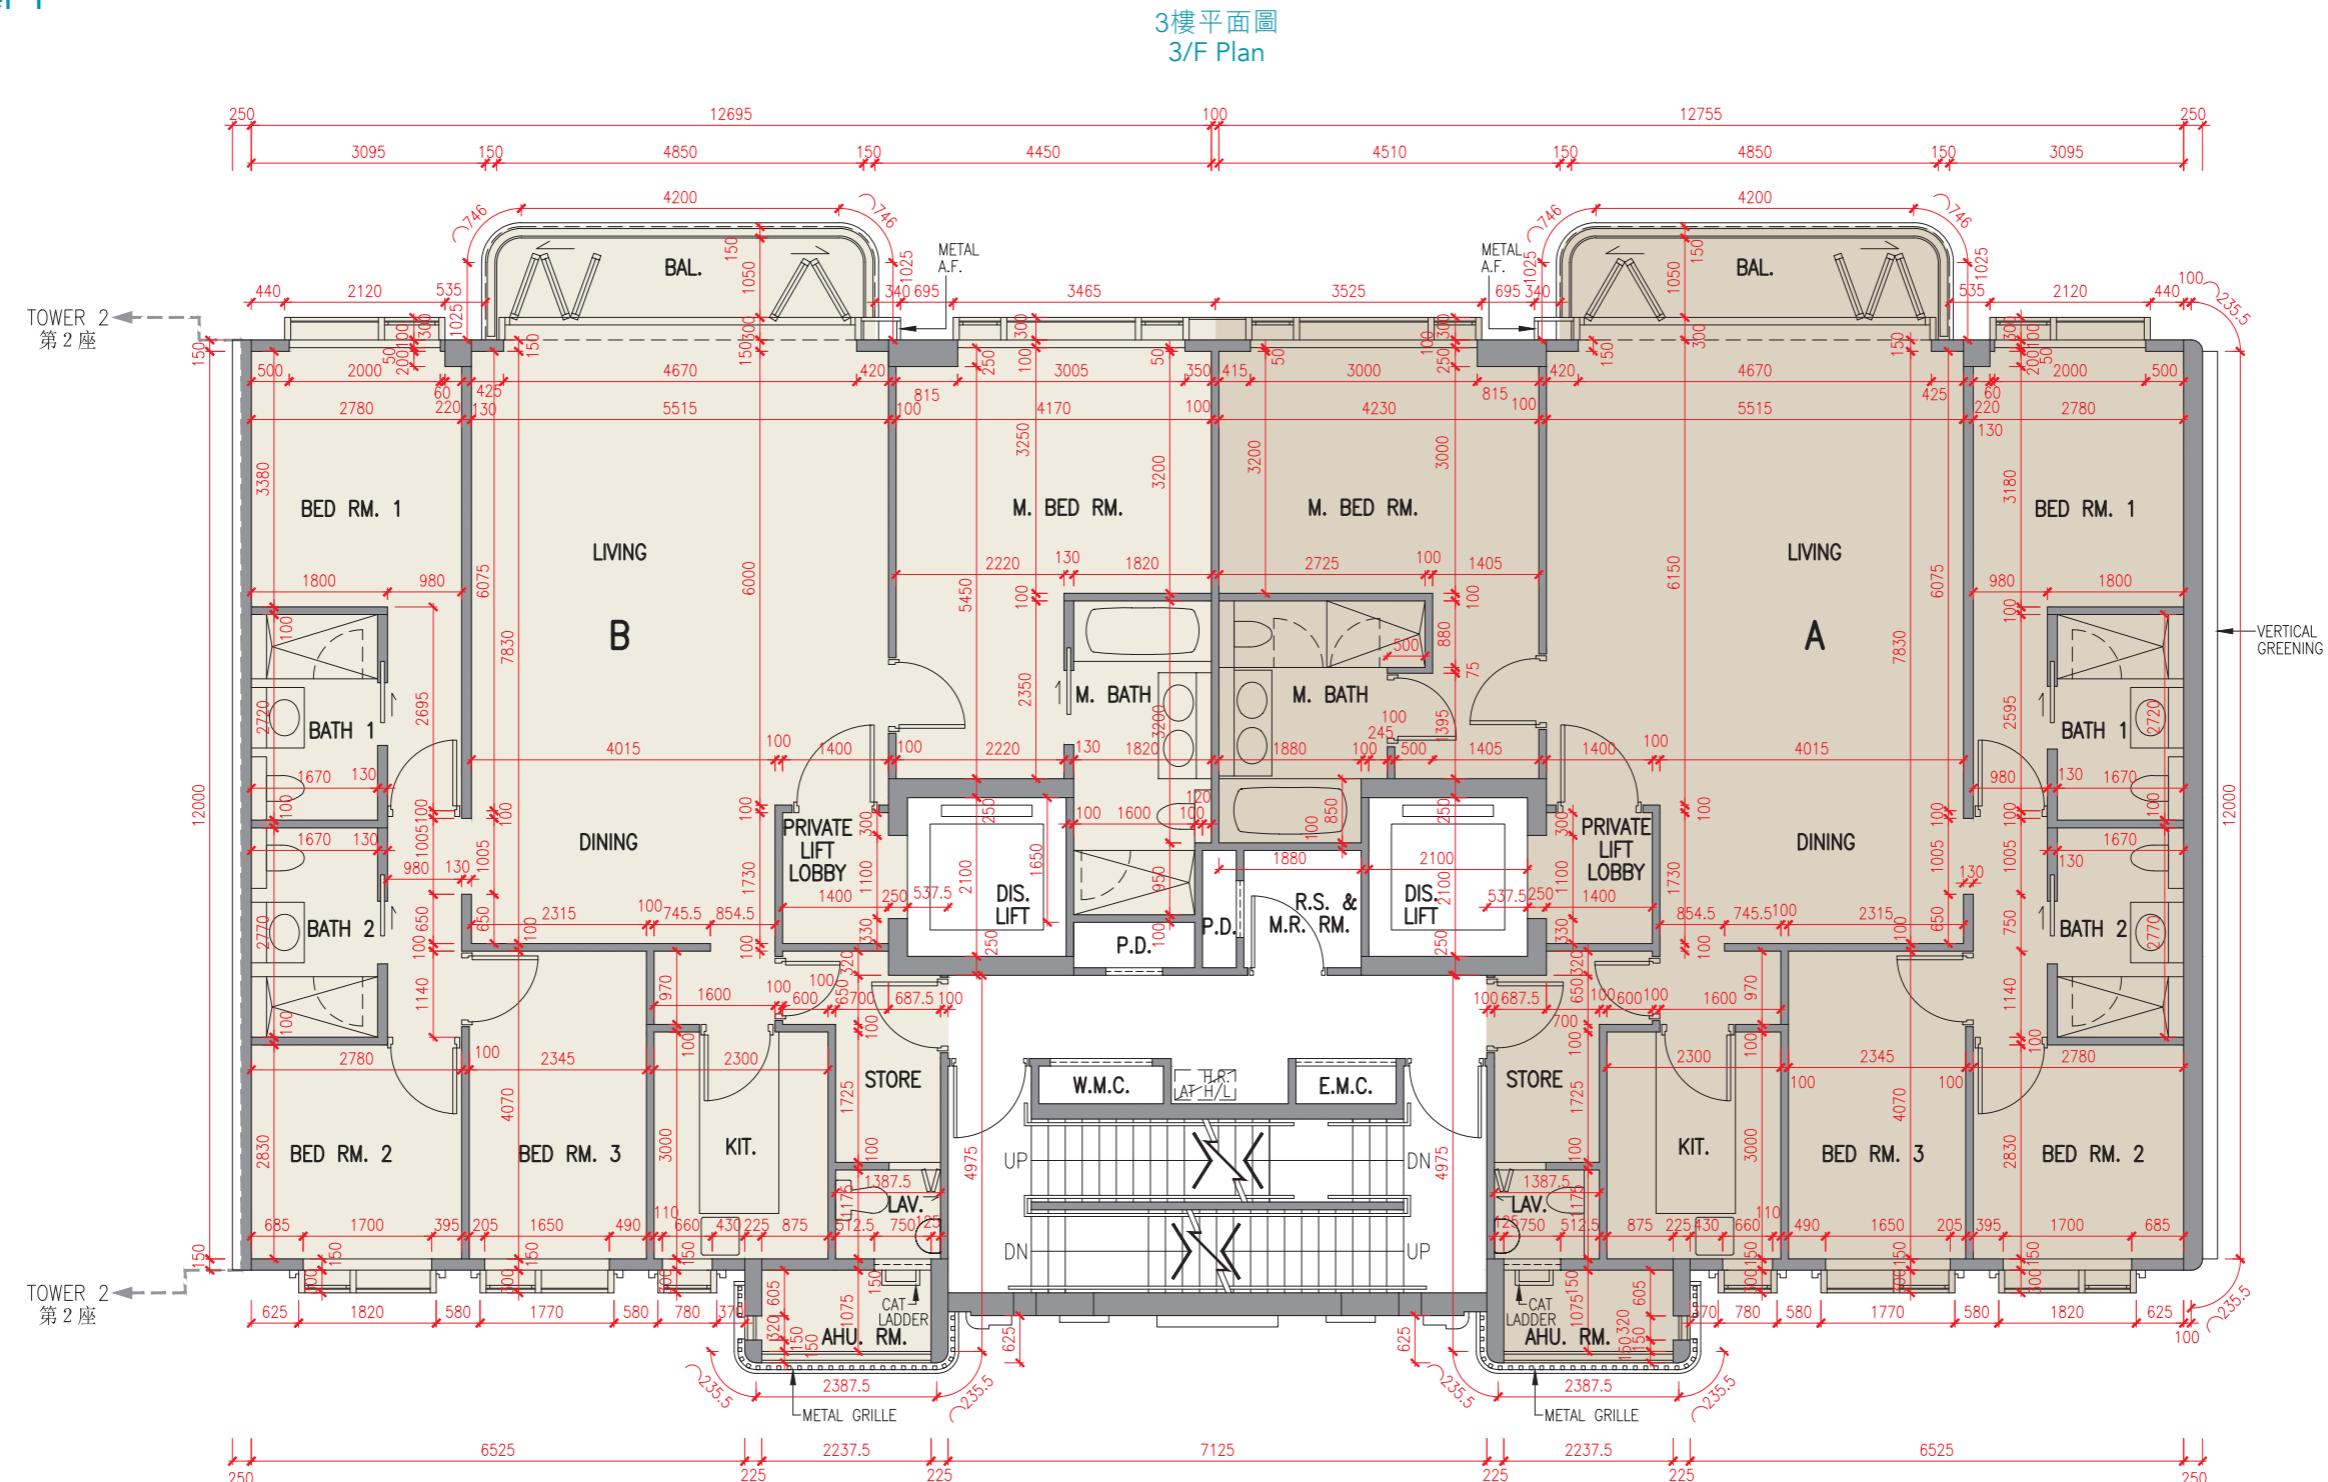
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

1. The dimensions in the floor plans are all structural dimensions in millimetre.
2. The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
3. The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A單位 Flat A	B單位 Flat B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第1座 Tower 1	2樓 2/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175, 200	150, 175, 200

第1座 Tower 1



比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

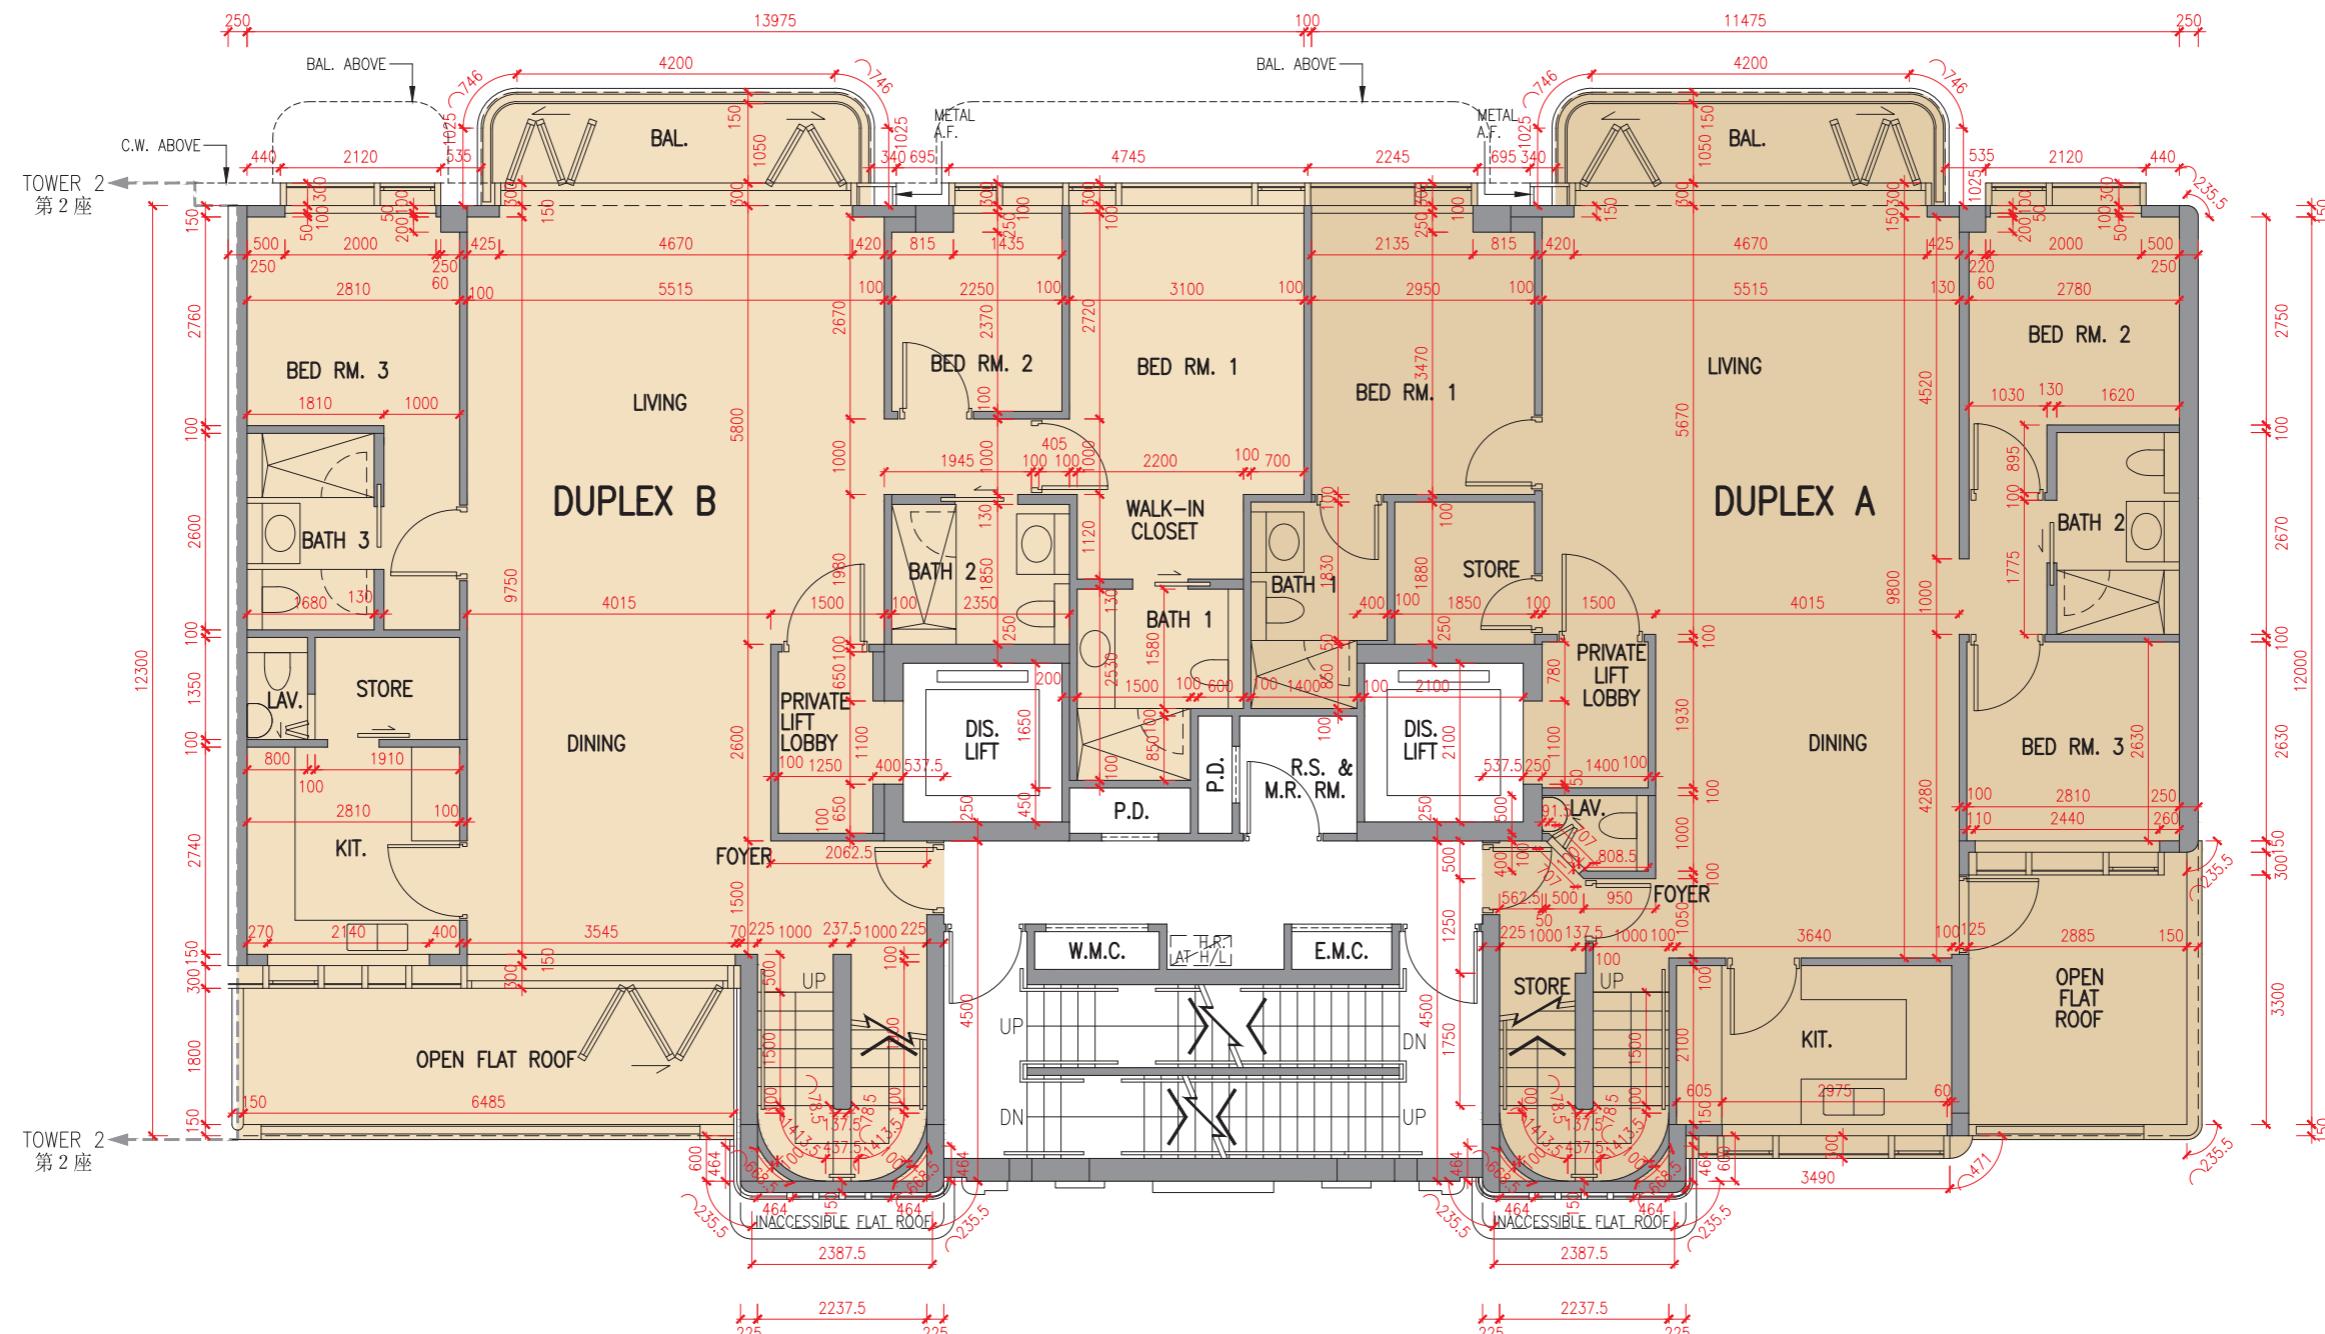
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A單位 Flat A	B單位 Flat B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第1座 Tower 1	3樓 3/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175	150, 175

第1座 Tower 1

5樓平面圖
5/F Plan

比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

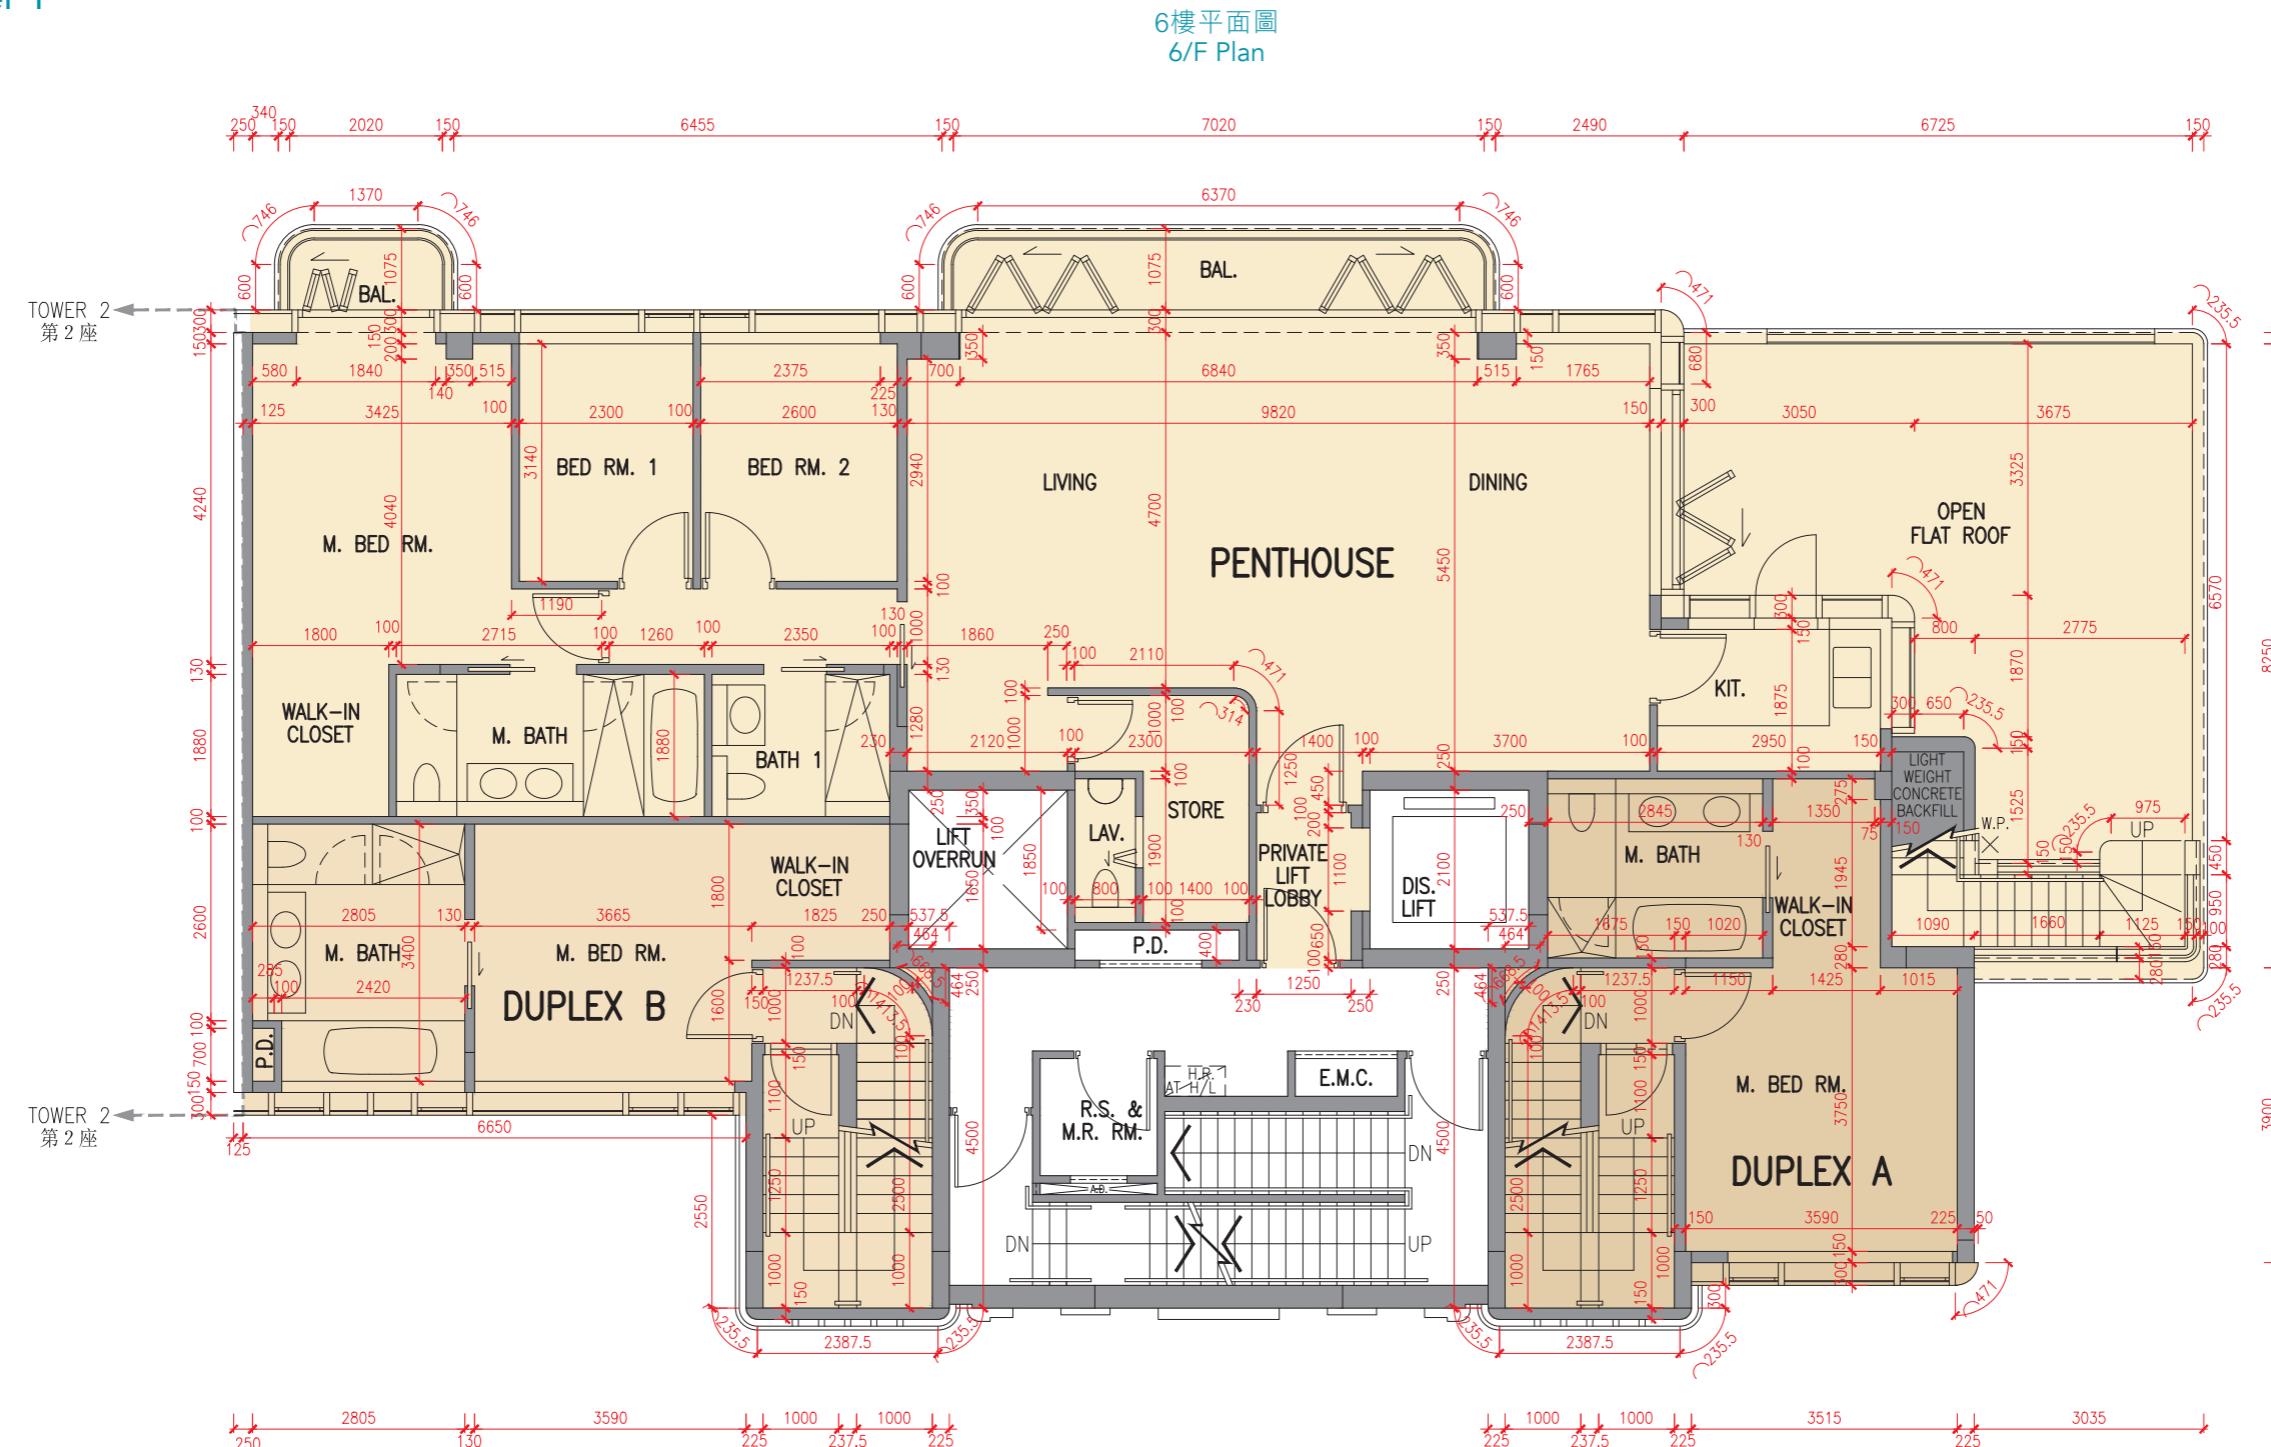
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第1座 Tower 1	5樓 5/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175, 200	150, 175, 200

第1座 Tower 1

比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

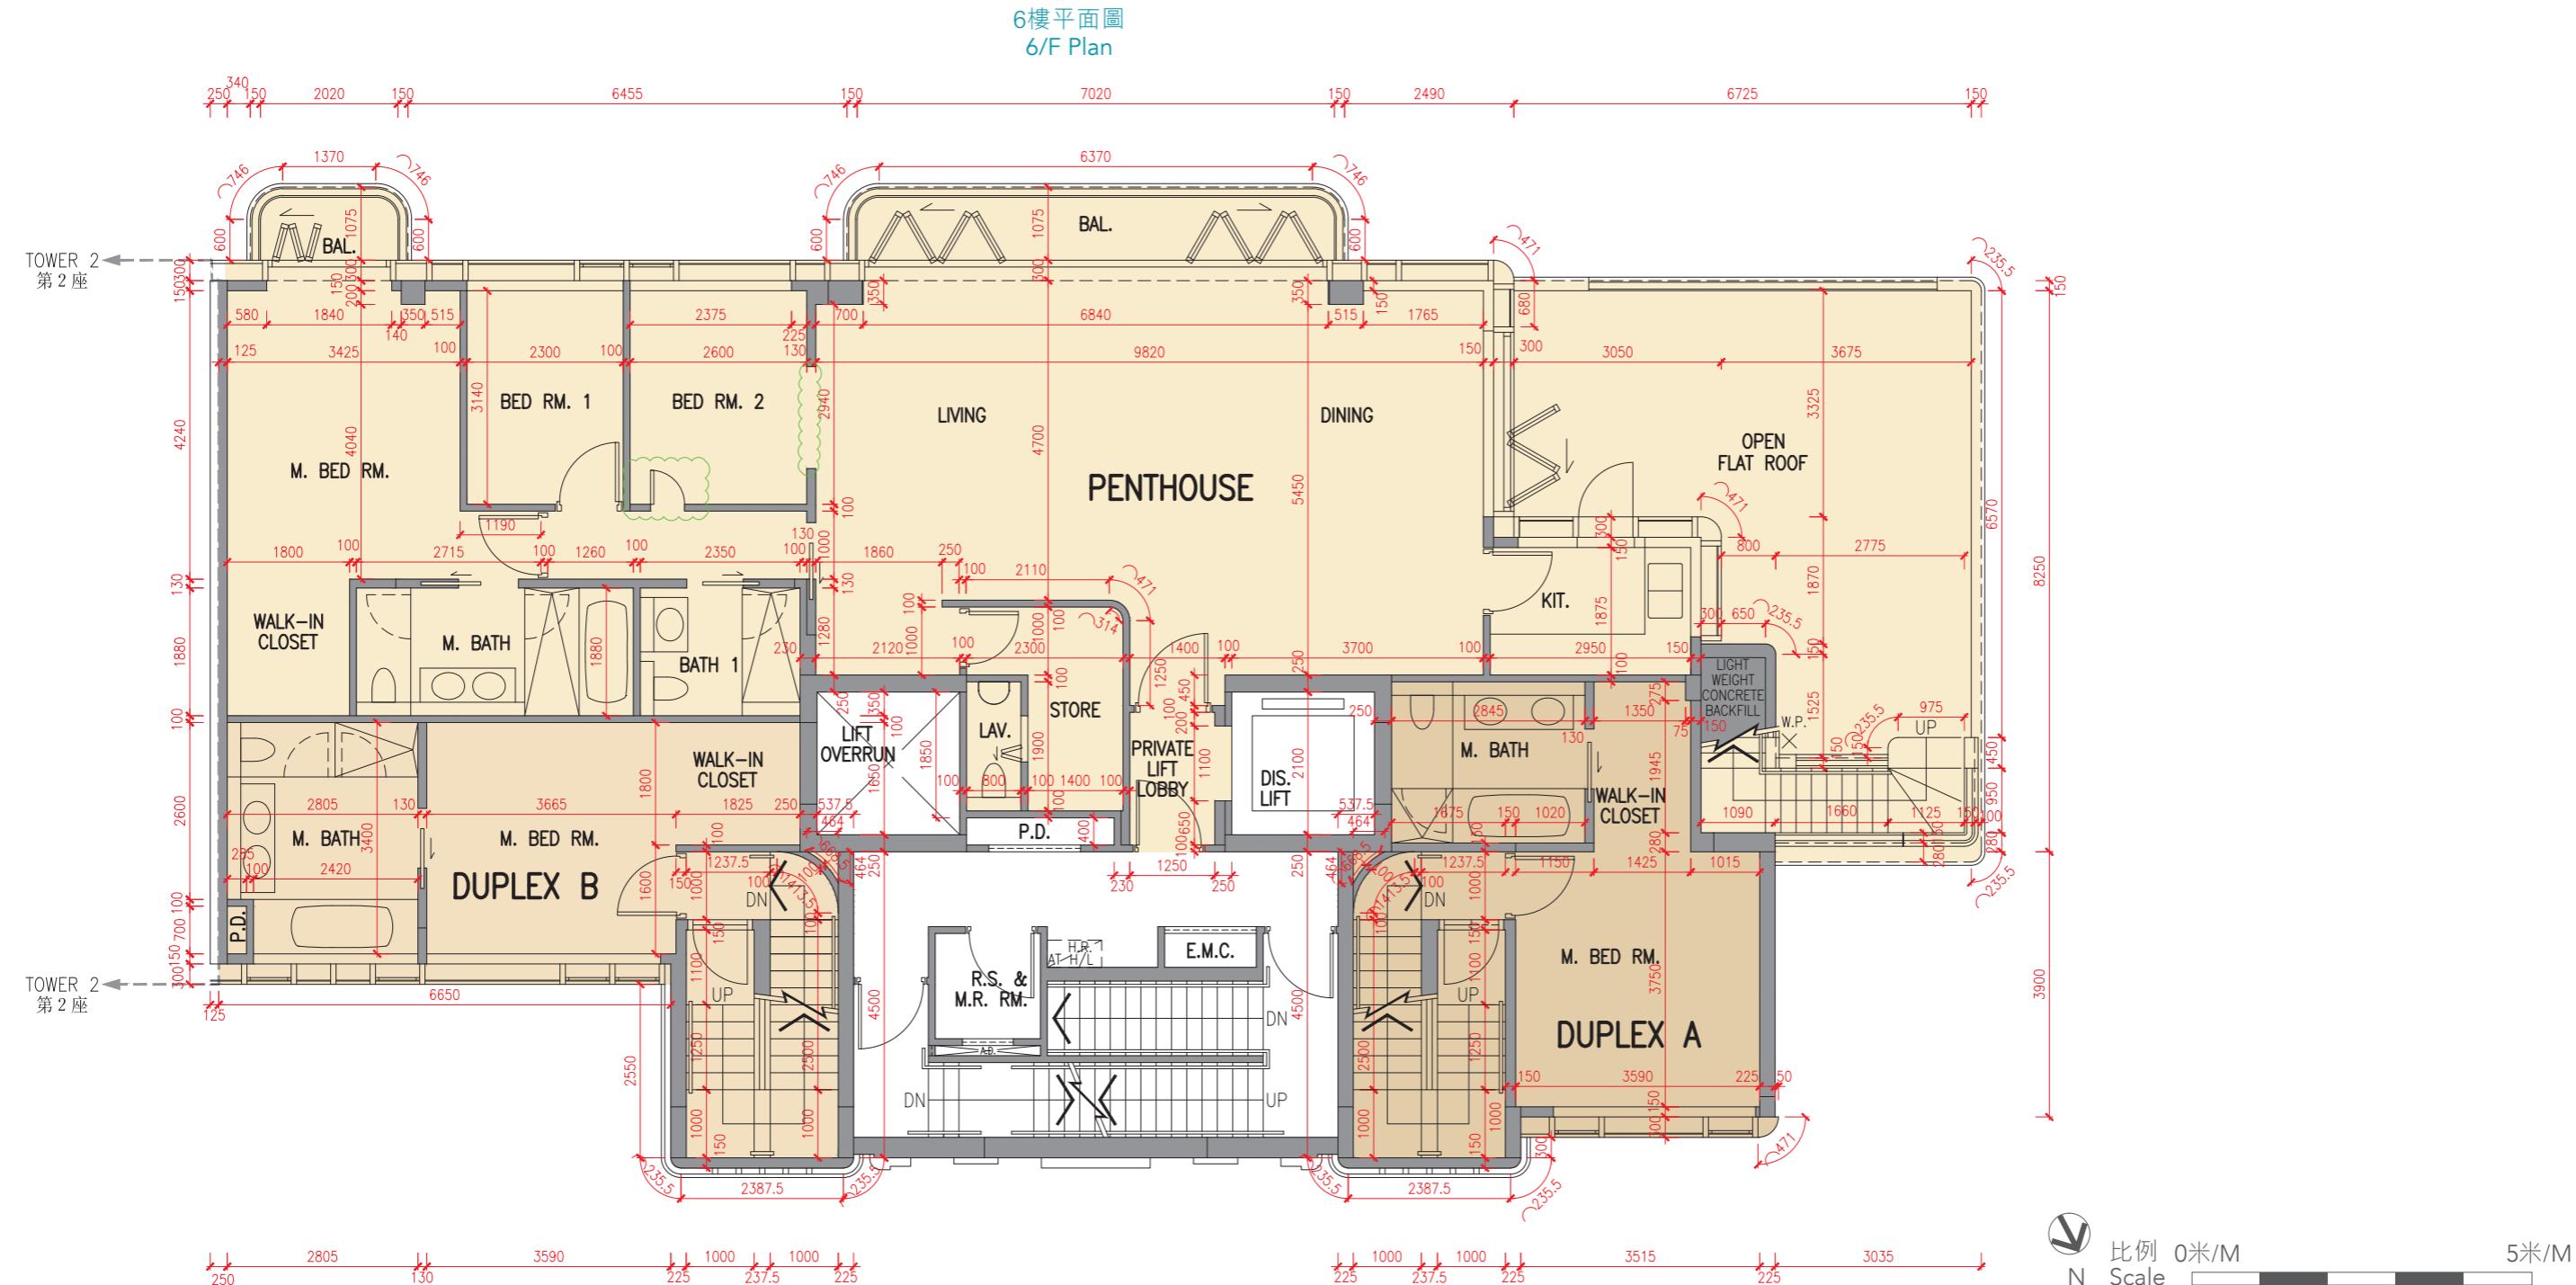
	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第1座 Tower 1	6樓 6/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150	150, 175	150, 175, 200, 225

第1座 Tower 1

6樓現狀平面圖 6/F Floor Plan In "As-Is" Layout

第一座6樓頂層單位之睡房2的門及部分牆身已被修改，請見綠色標記所示。認可人士證明所修改的部分是根據建築物條例第41(3)條所獲豁免的建築工程及無須修訂建築圖則

The door and part of the wall of Bedroom 2, Penthouse on 6/F, Tower 1 has been altered, please refer to the position marked in green. The Authorised Person certified that such alteration is exempted building works under Section 41(3) of the Building Ordinance and no revision to the General Building Plans is required.



因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註

- 備註

 - 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
 - 每個住宅物業的層與層之間的高度指該樓層之石屎地台面上一層石屎地台面之高度距離。
 - 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

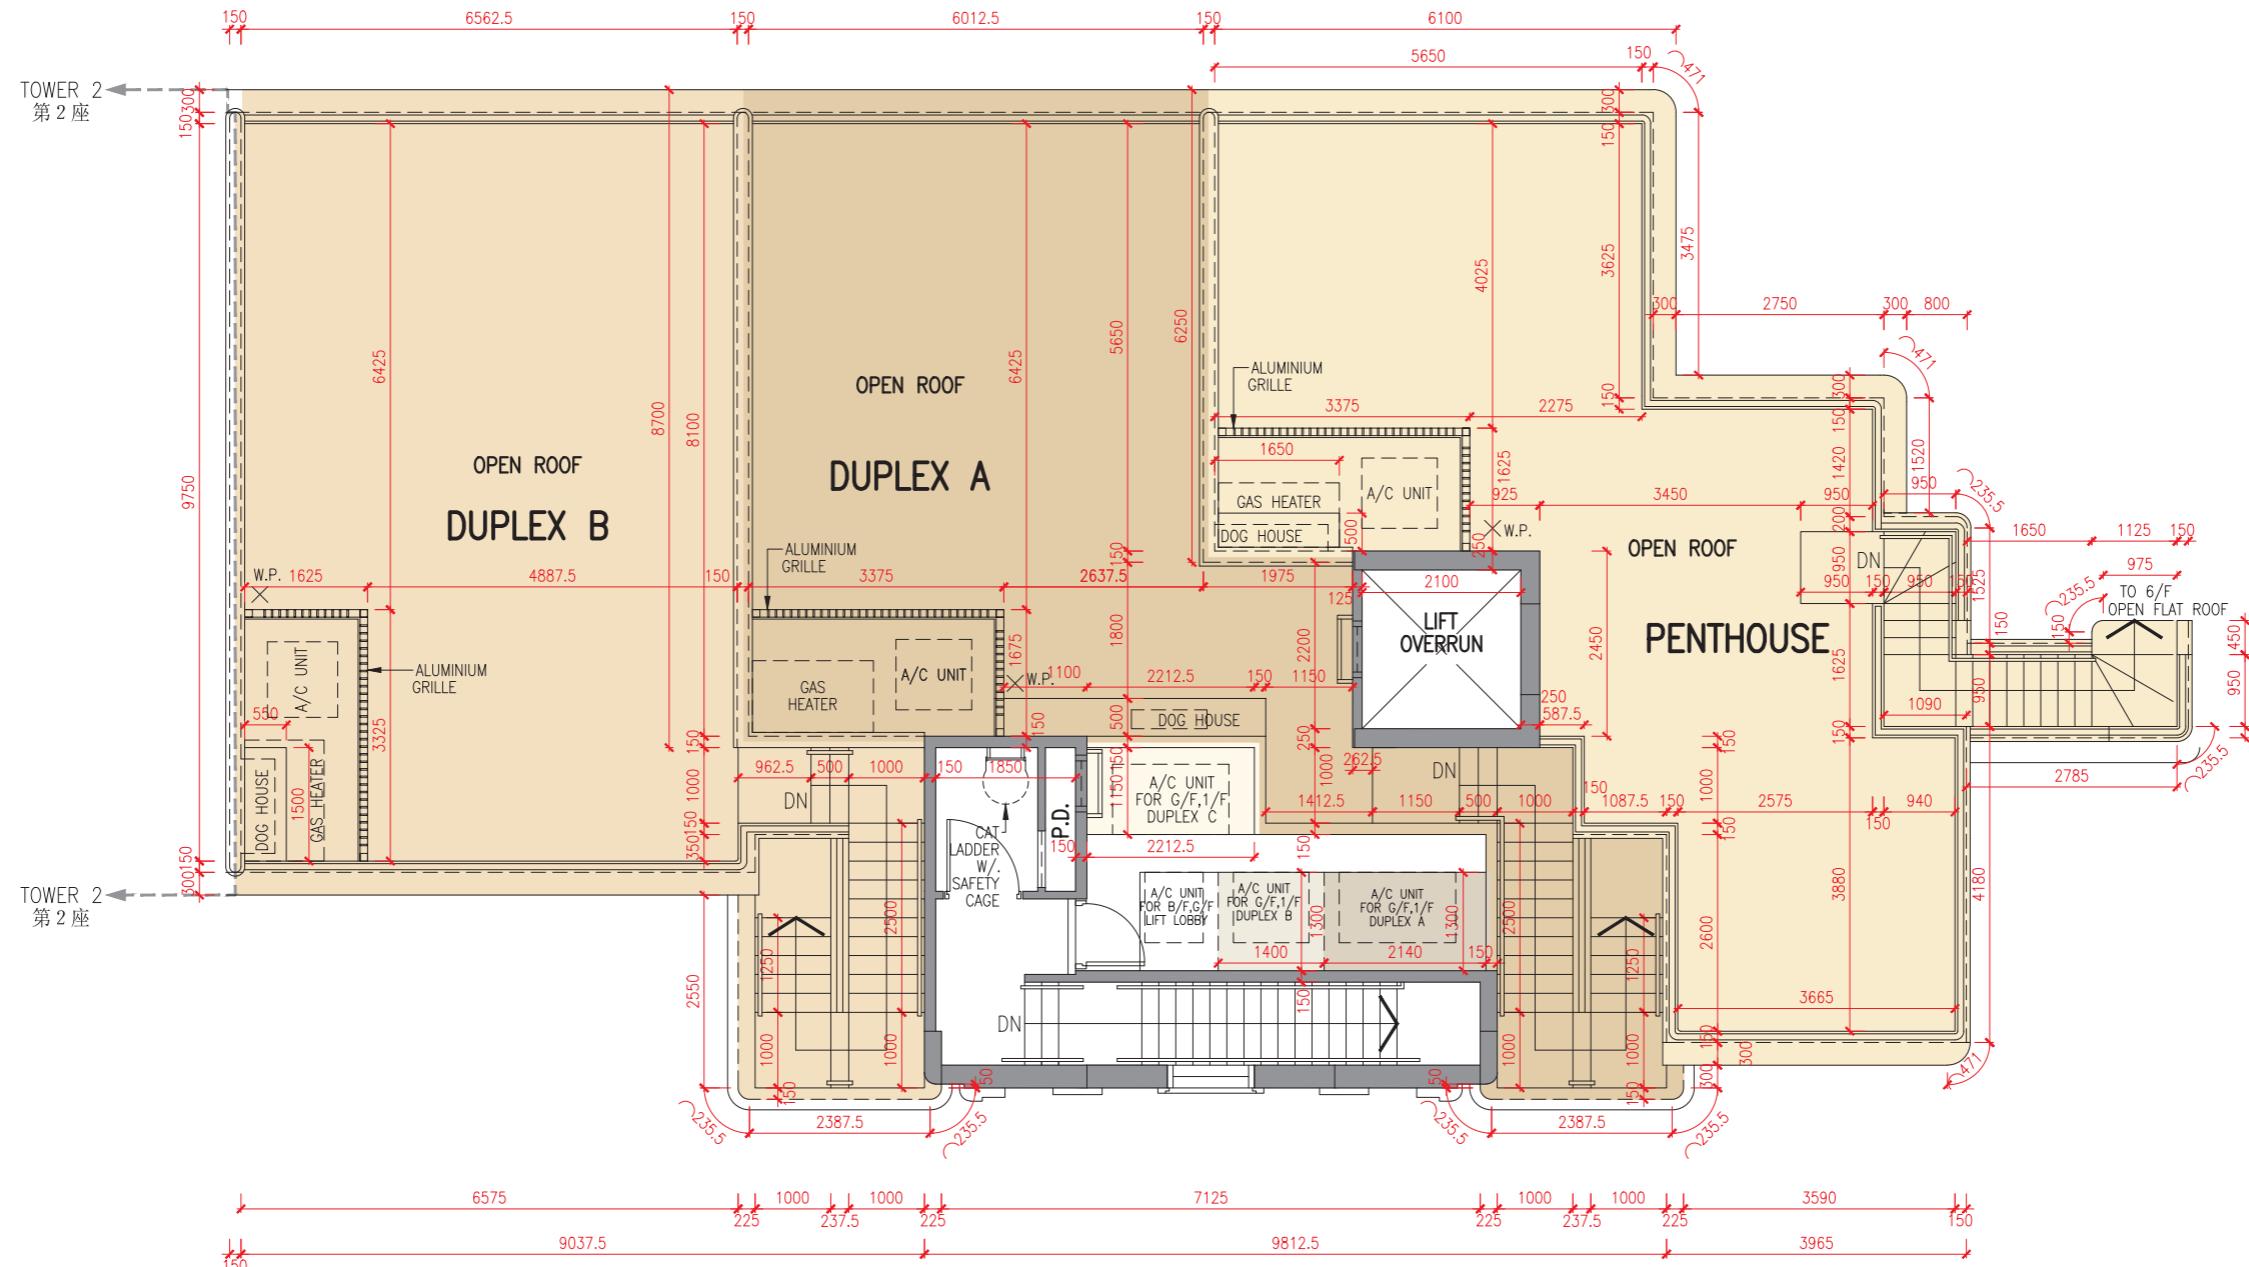
Notes:

- Notes:

 1. The dimensions in the floor plans are all structural dimensions in millimetre.
 2. The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
 3. The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第1座 Tower 1	6樓 6/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150	150, 175	150, 175, 200,

第1座 Tower 1

天台平面圖
Roof Plan

比例 0米/M
Scale 5米/M

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第1座 Tower 1	天台 Roof			不適用 N/A	
樓板厚度 (毫米) Thickness of the floor slabs (mm)						

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

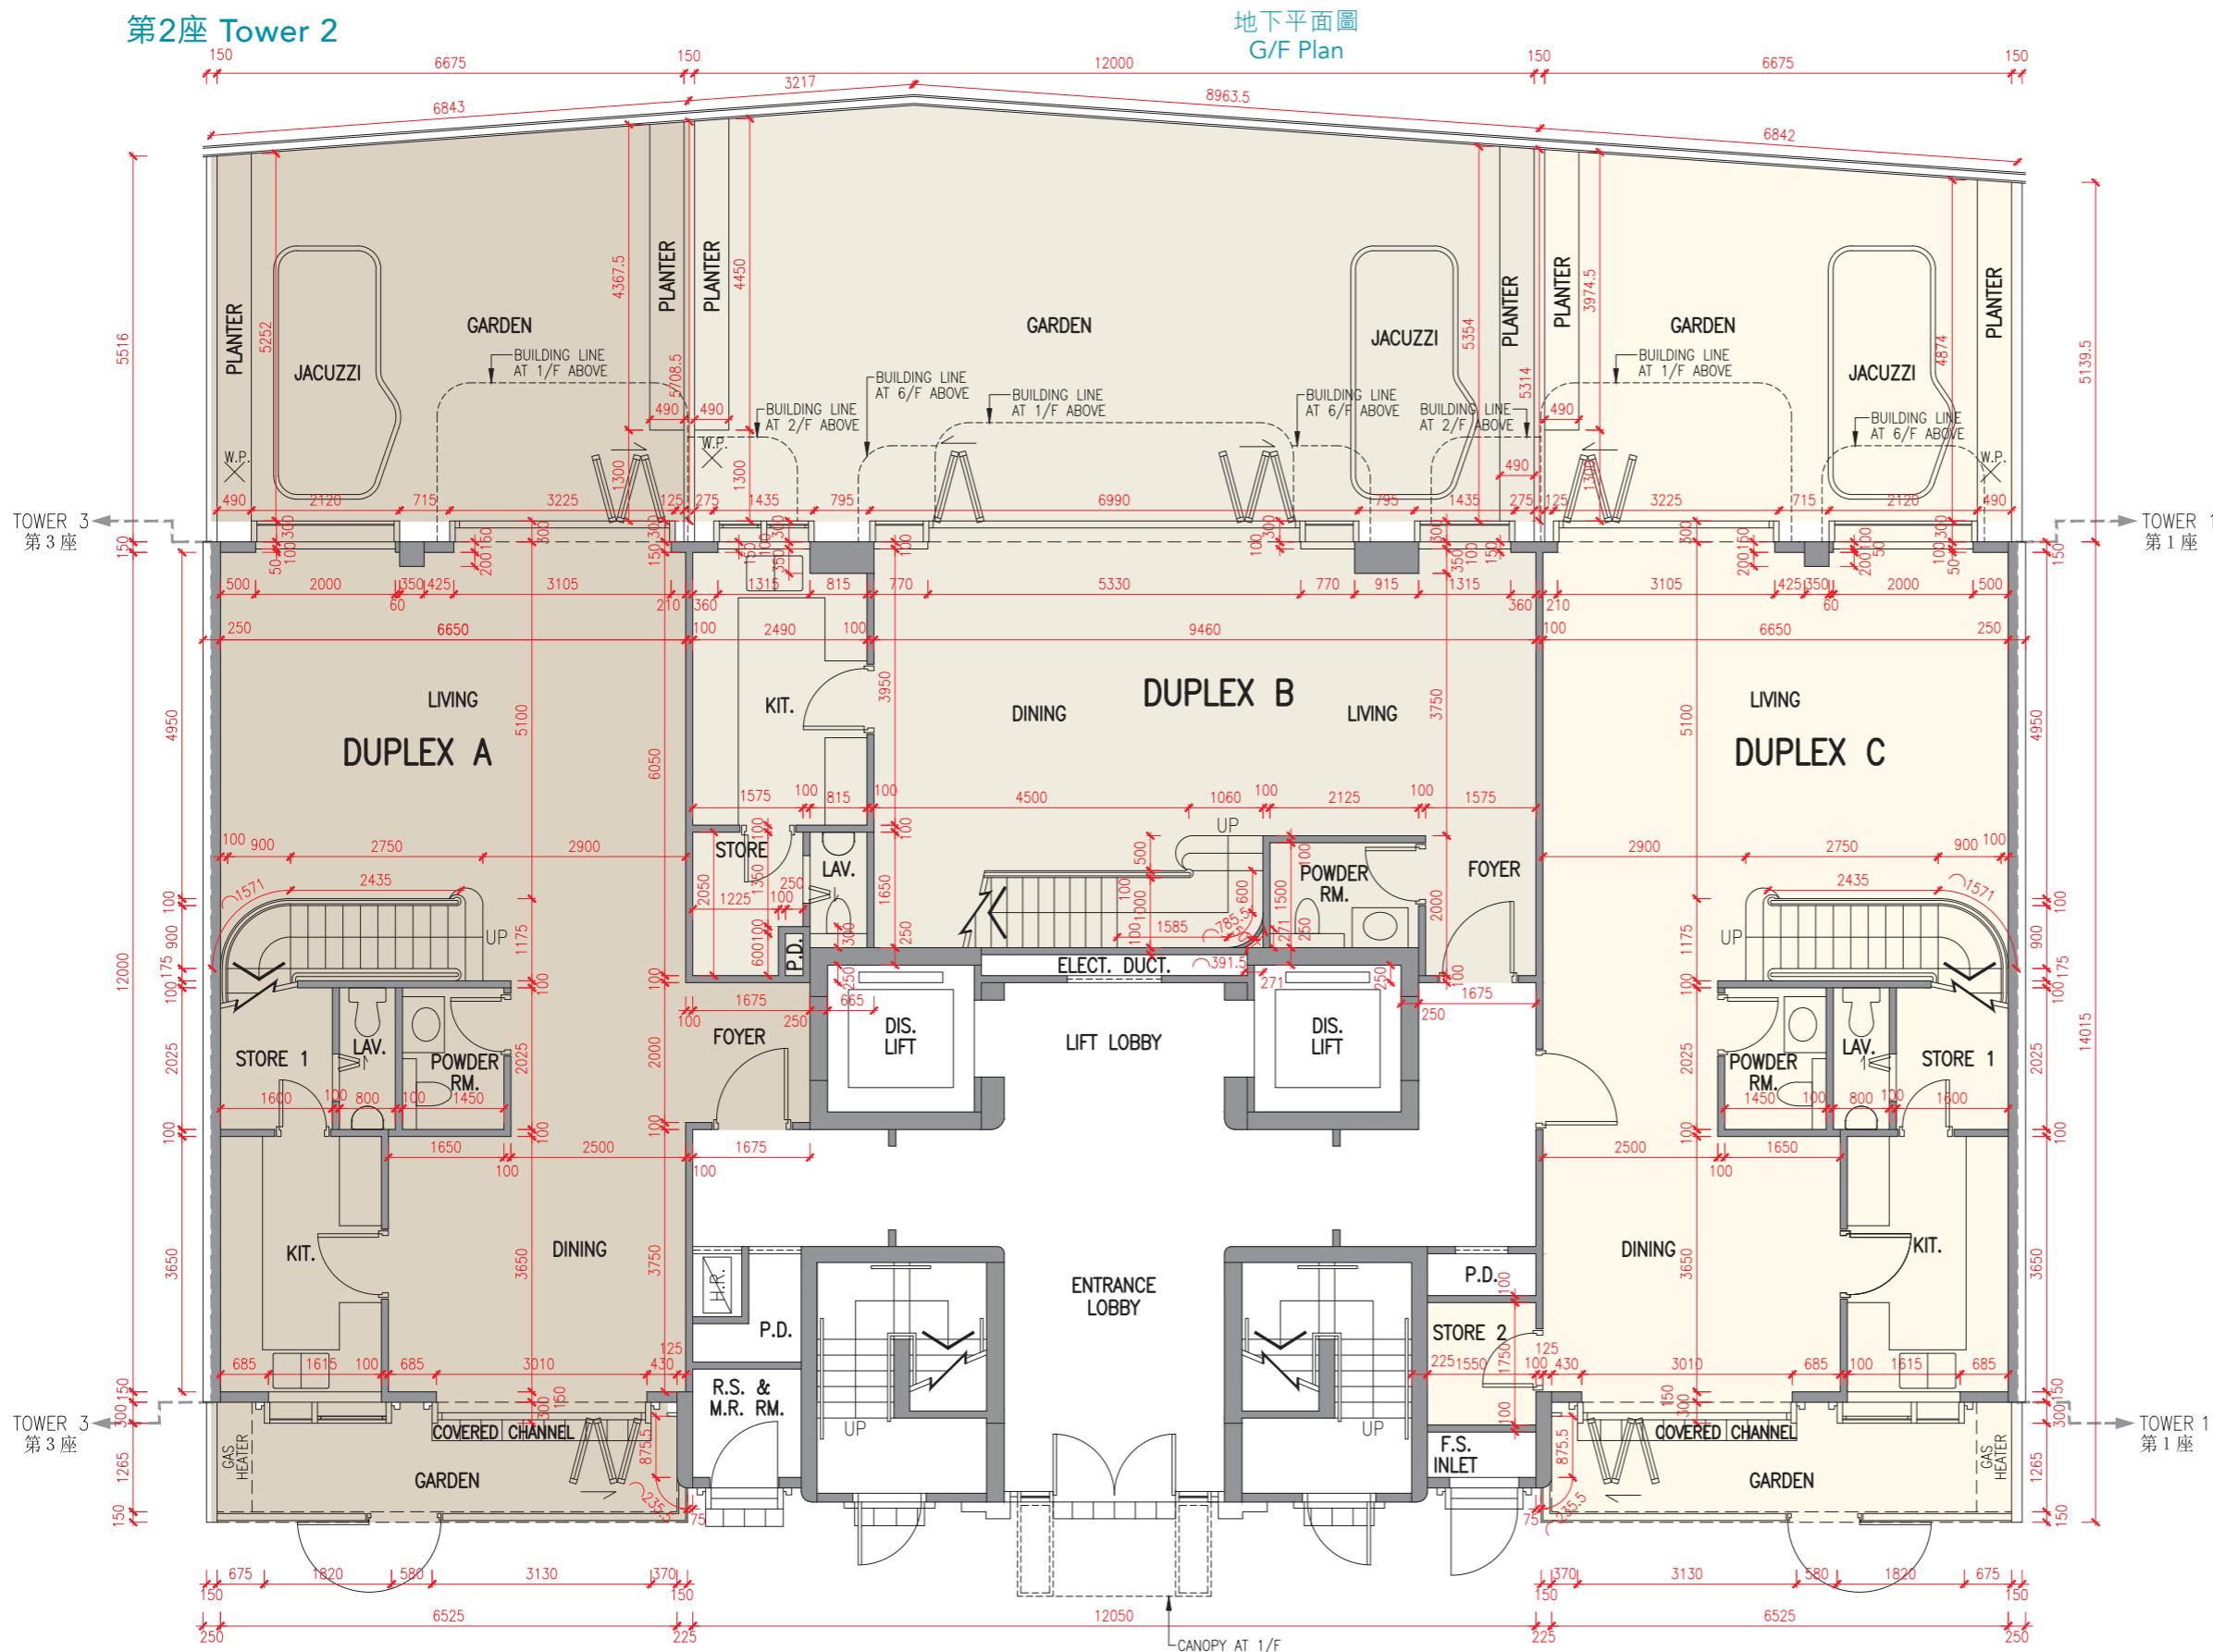
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

第2座 Tower 2

比例 0米/M
N Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
(Not applicable)

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	C複式單位 Duplex C
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第2座 Tower 2	地下 G/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				200, 250	200, 225, 250	200, 250

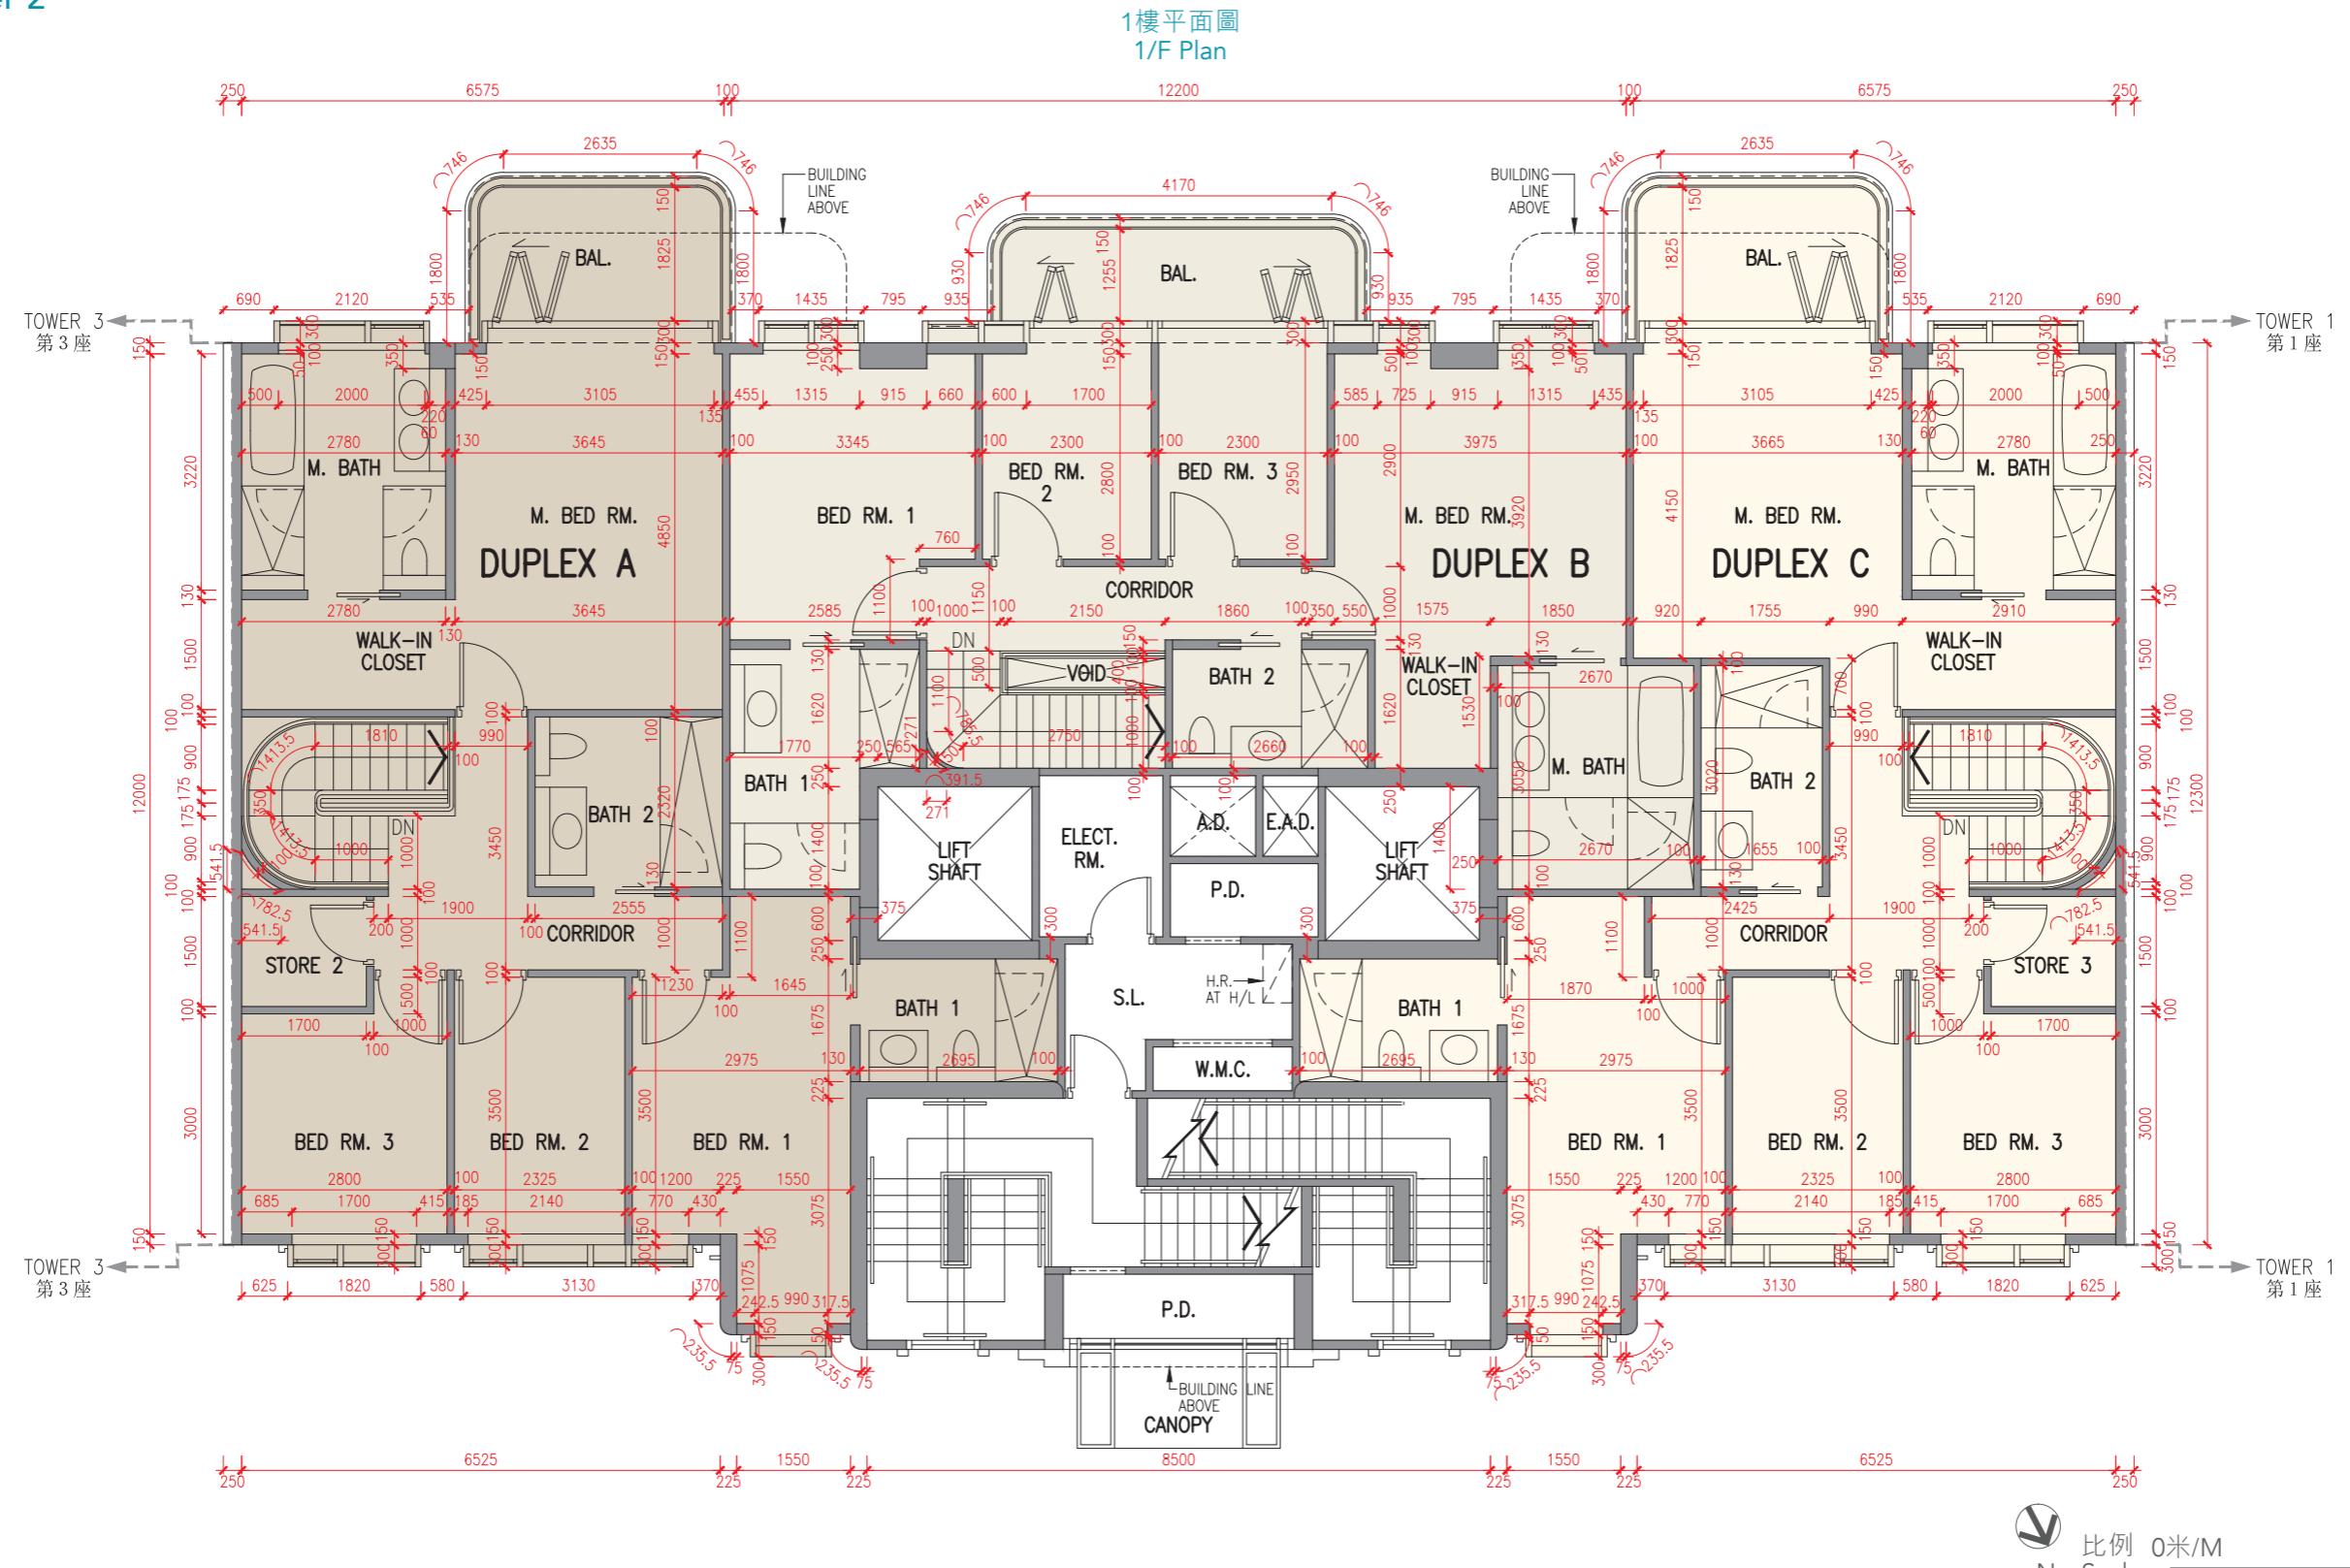
備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。
- 第2座地下及1樓A複式單位、B複式單位及C複式單位的空調機室外機安裝於此座天台上。

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.
- The air-conditioning outdoor unit(s) for Duplex A, Duplex B and Duplex C on G/F and 1/F of Tower 2 is/are located on the roof of the Tower.

第2座 Tower 2



	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	C複式單位 Duplex C
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第2座 Tower 2	1樓 1/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 200	150, 200	150, 200

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

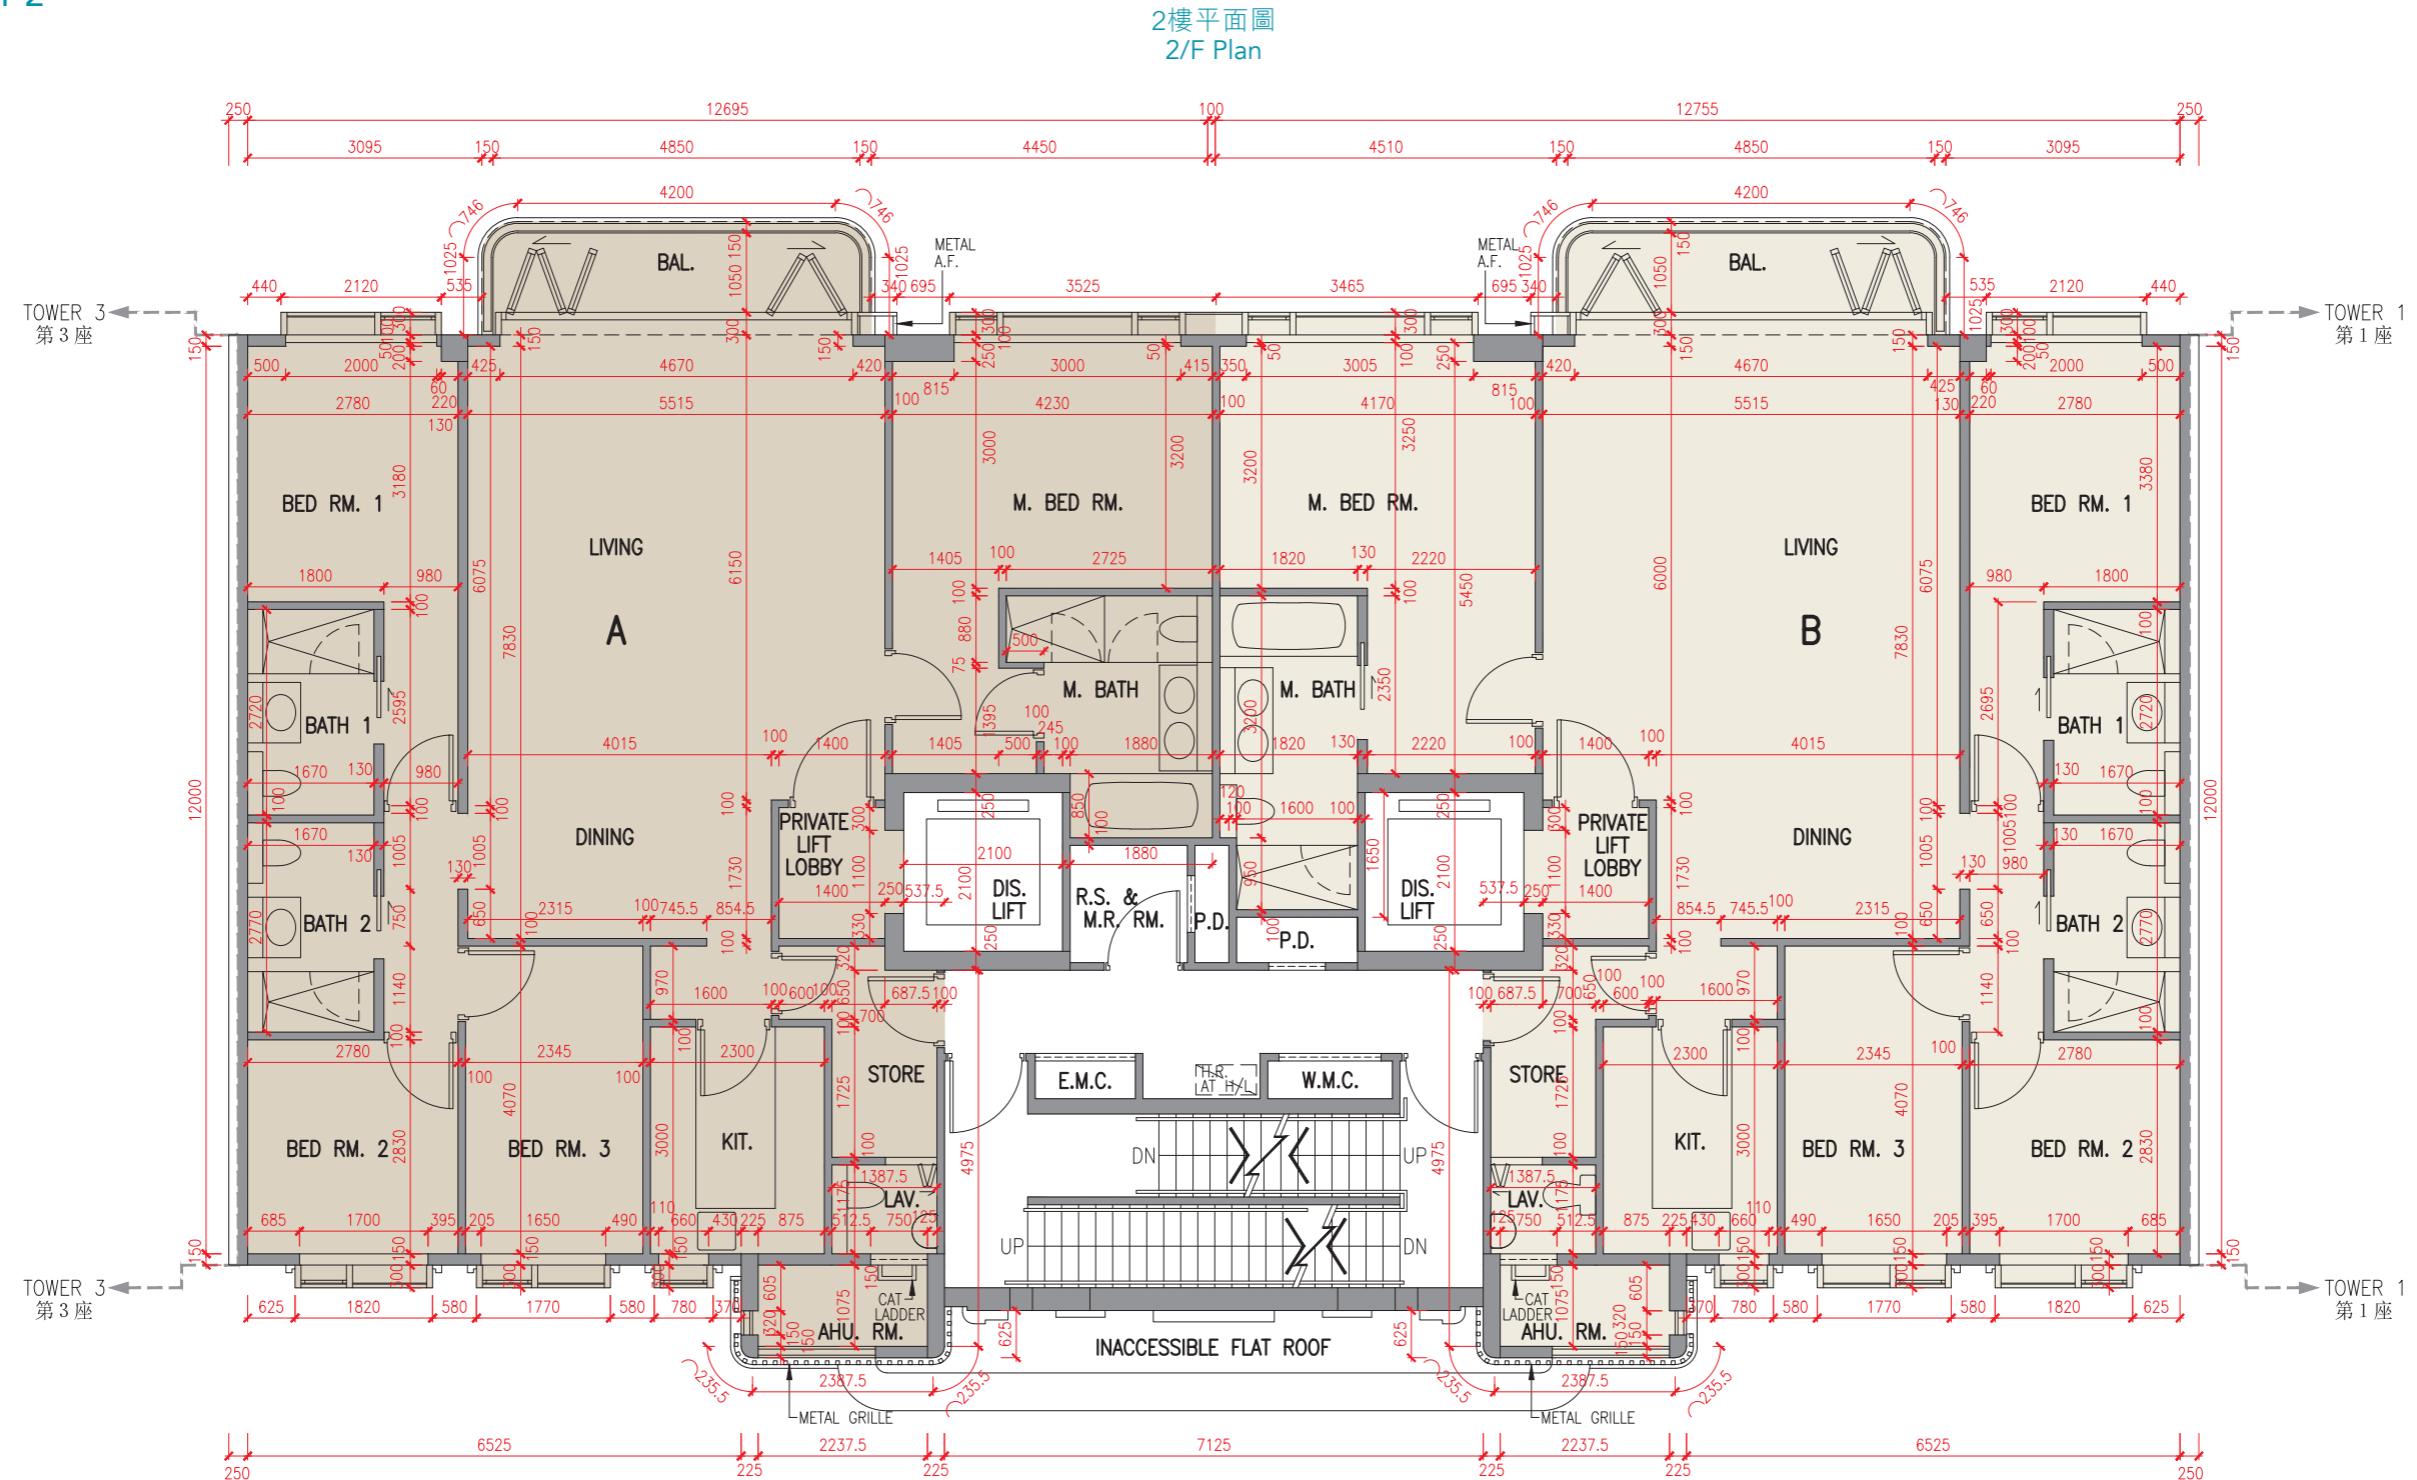
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。
- 第2座地下及1樓A複式單位、B複式單位及C複式單位的空調機室外機安裝於此座天台上。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.
- The air-conditioning outdoor unit(s) for Duplex A, Duplex B and Duplex C on G/F and 1/F of Tower 2 is/are located on the roof of the Tower.

第2座 Tower 2

比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

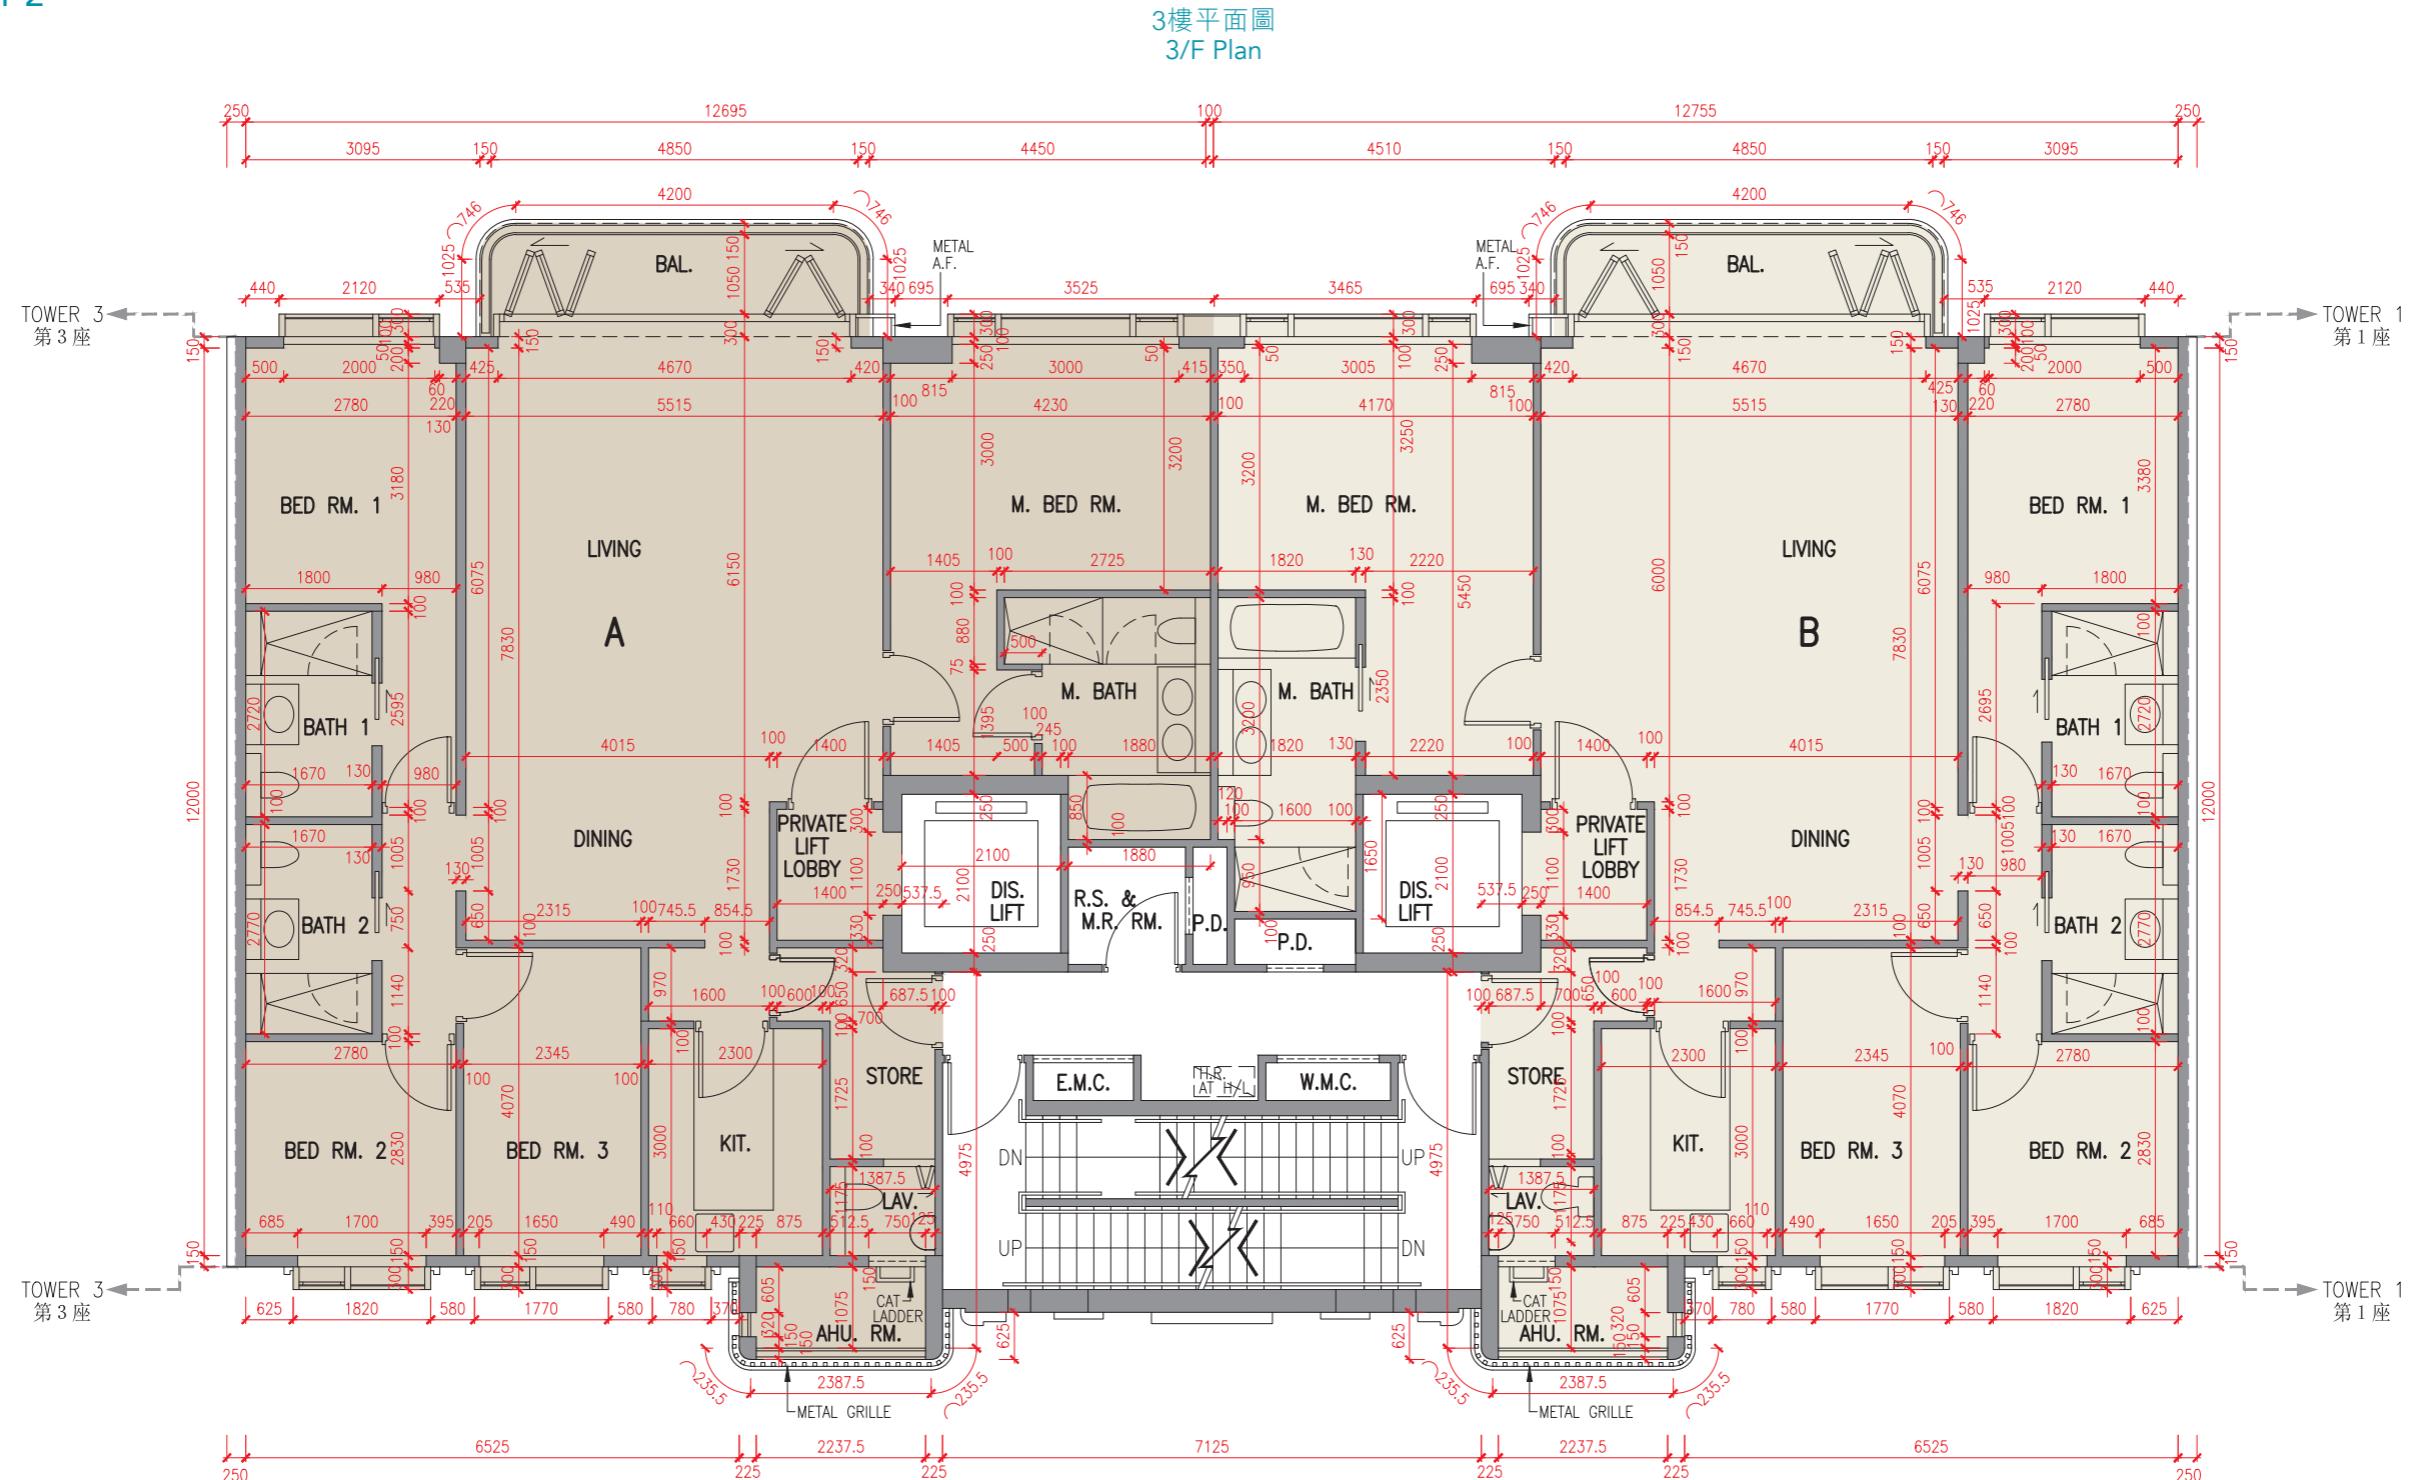
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A單位 Flat A	B單位 Flat B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第2座 Tower 2	2樓 2/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175, 200	150, 175, 200

第2座 Tower 2

比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

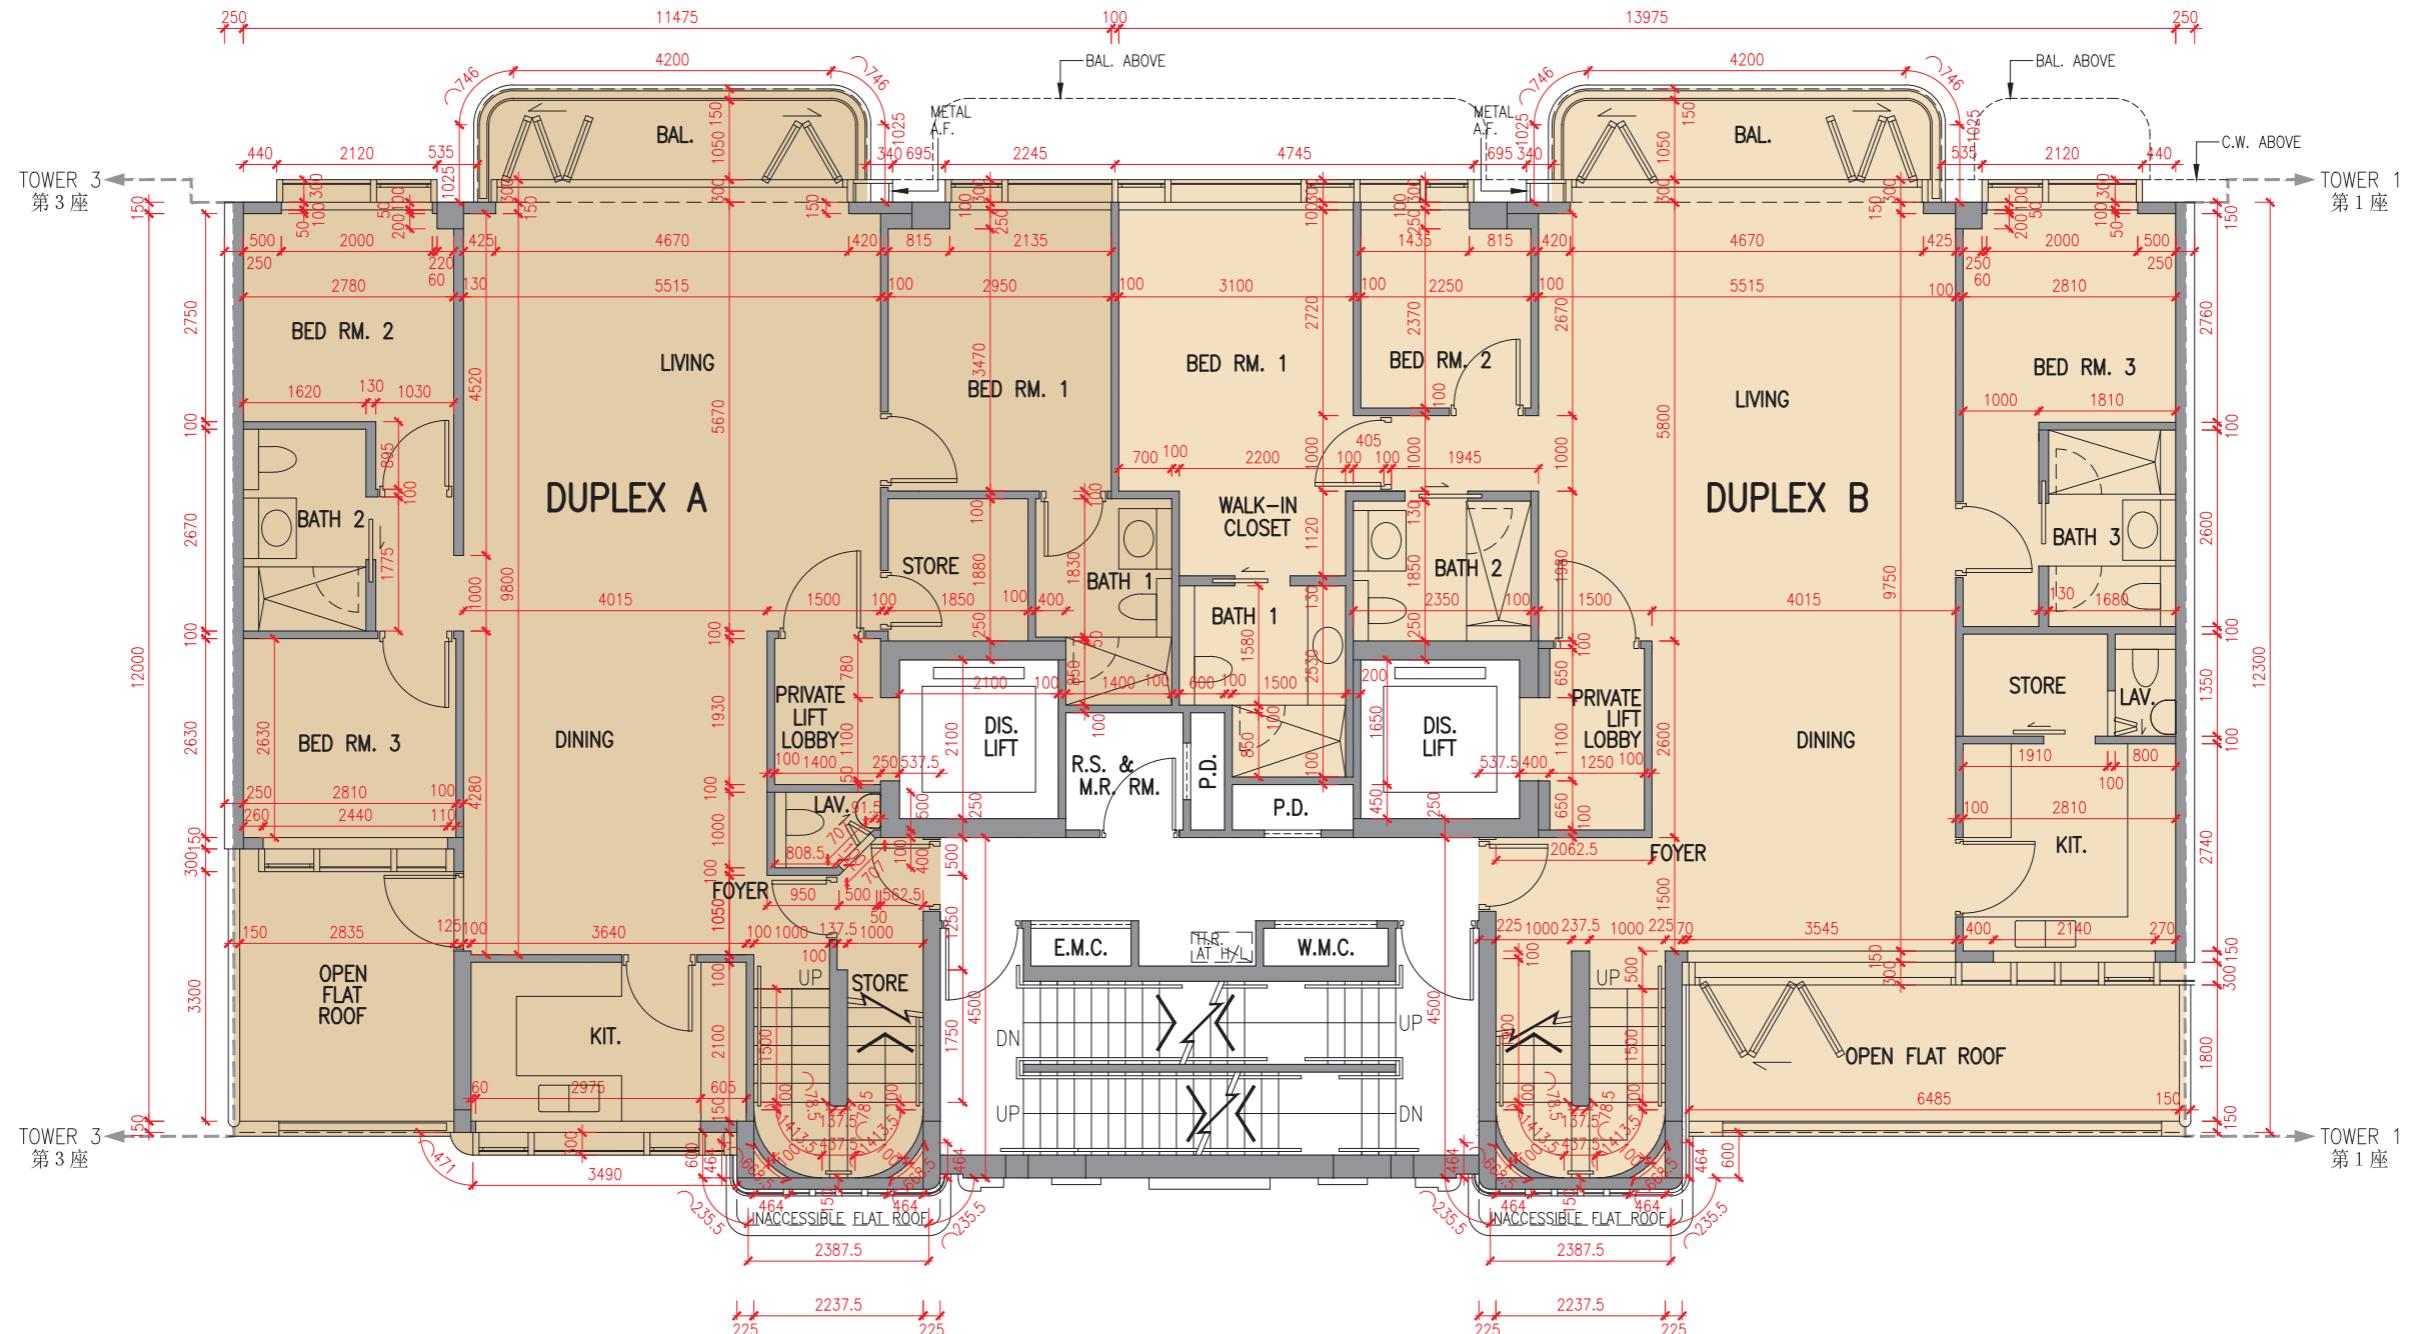
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A單位 Flat A	B單位 Flat B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第2座 Tower 2	3樓 3/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175	150, 175

第2座 Tower 2

5樓平面圖
5/F Plan比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

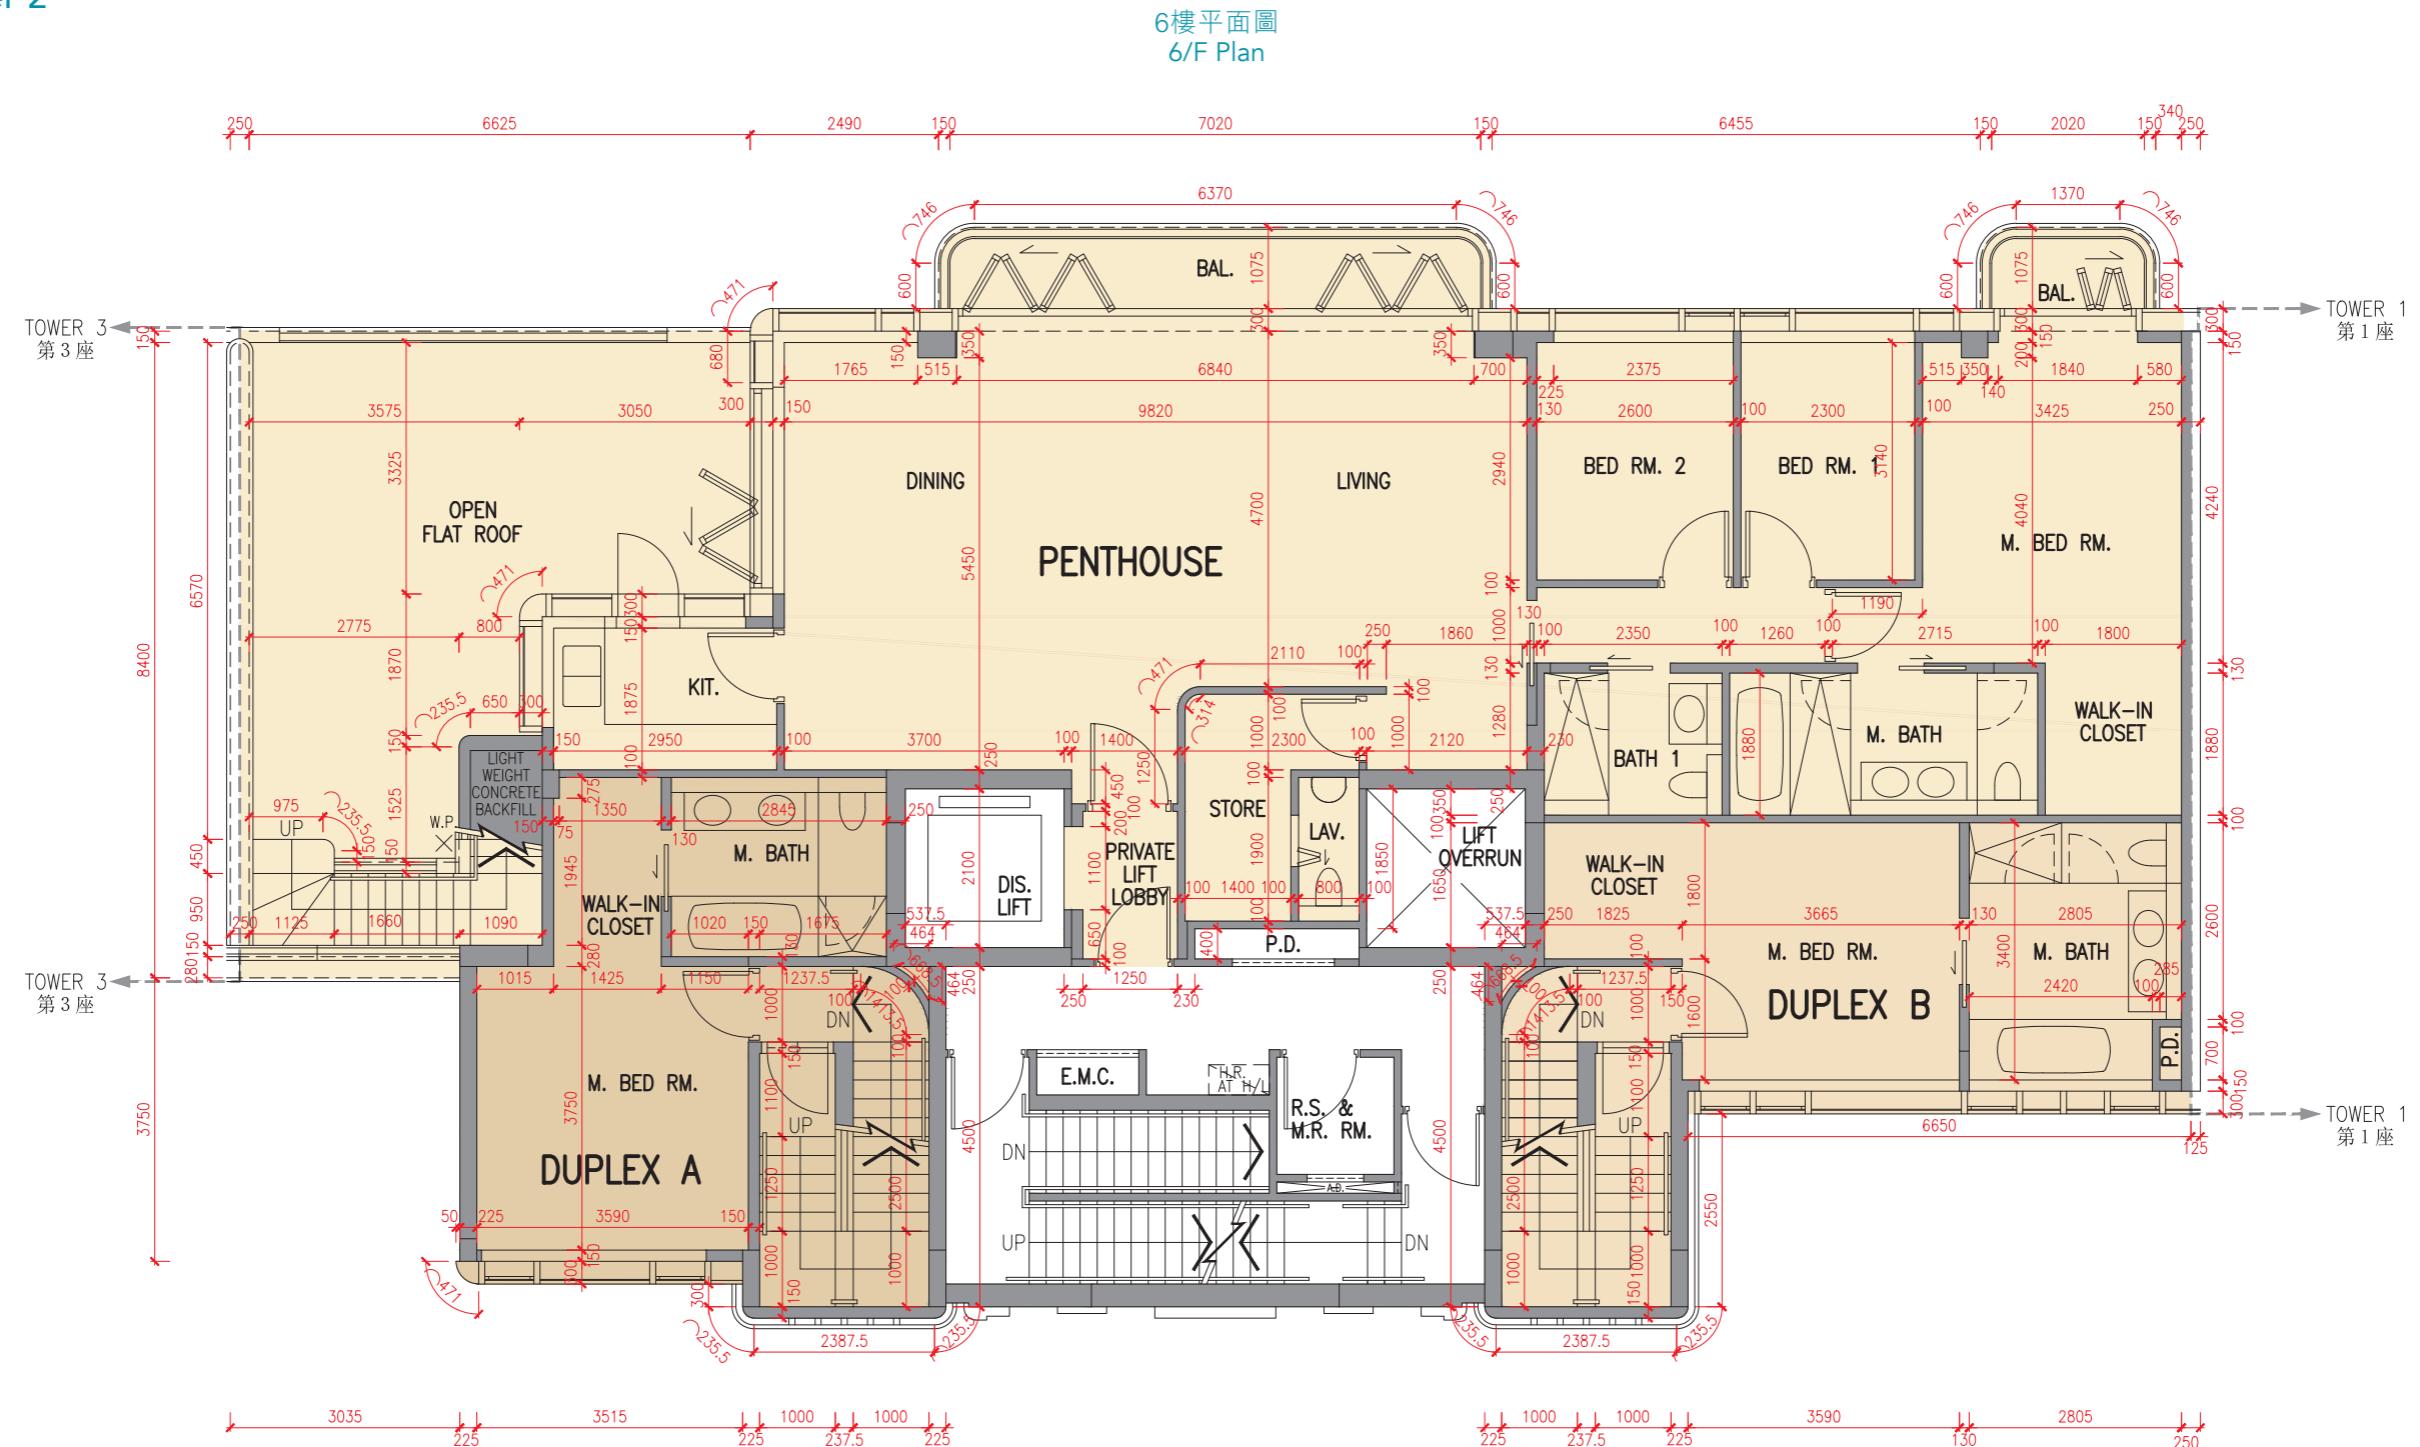
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第2座 Tower 2	5樓 5/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175, 200	150, 175, 200

第2座 Tower 2



比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

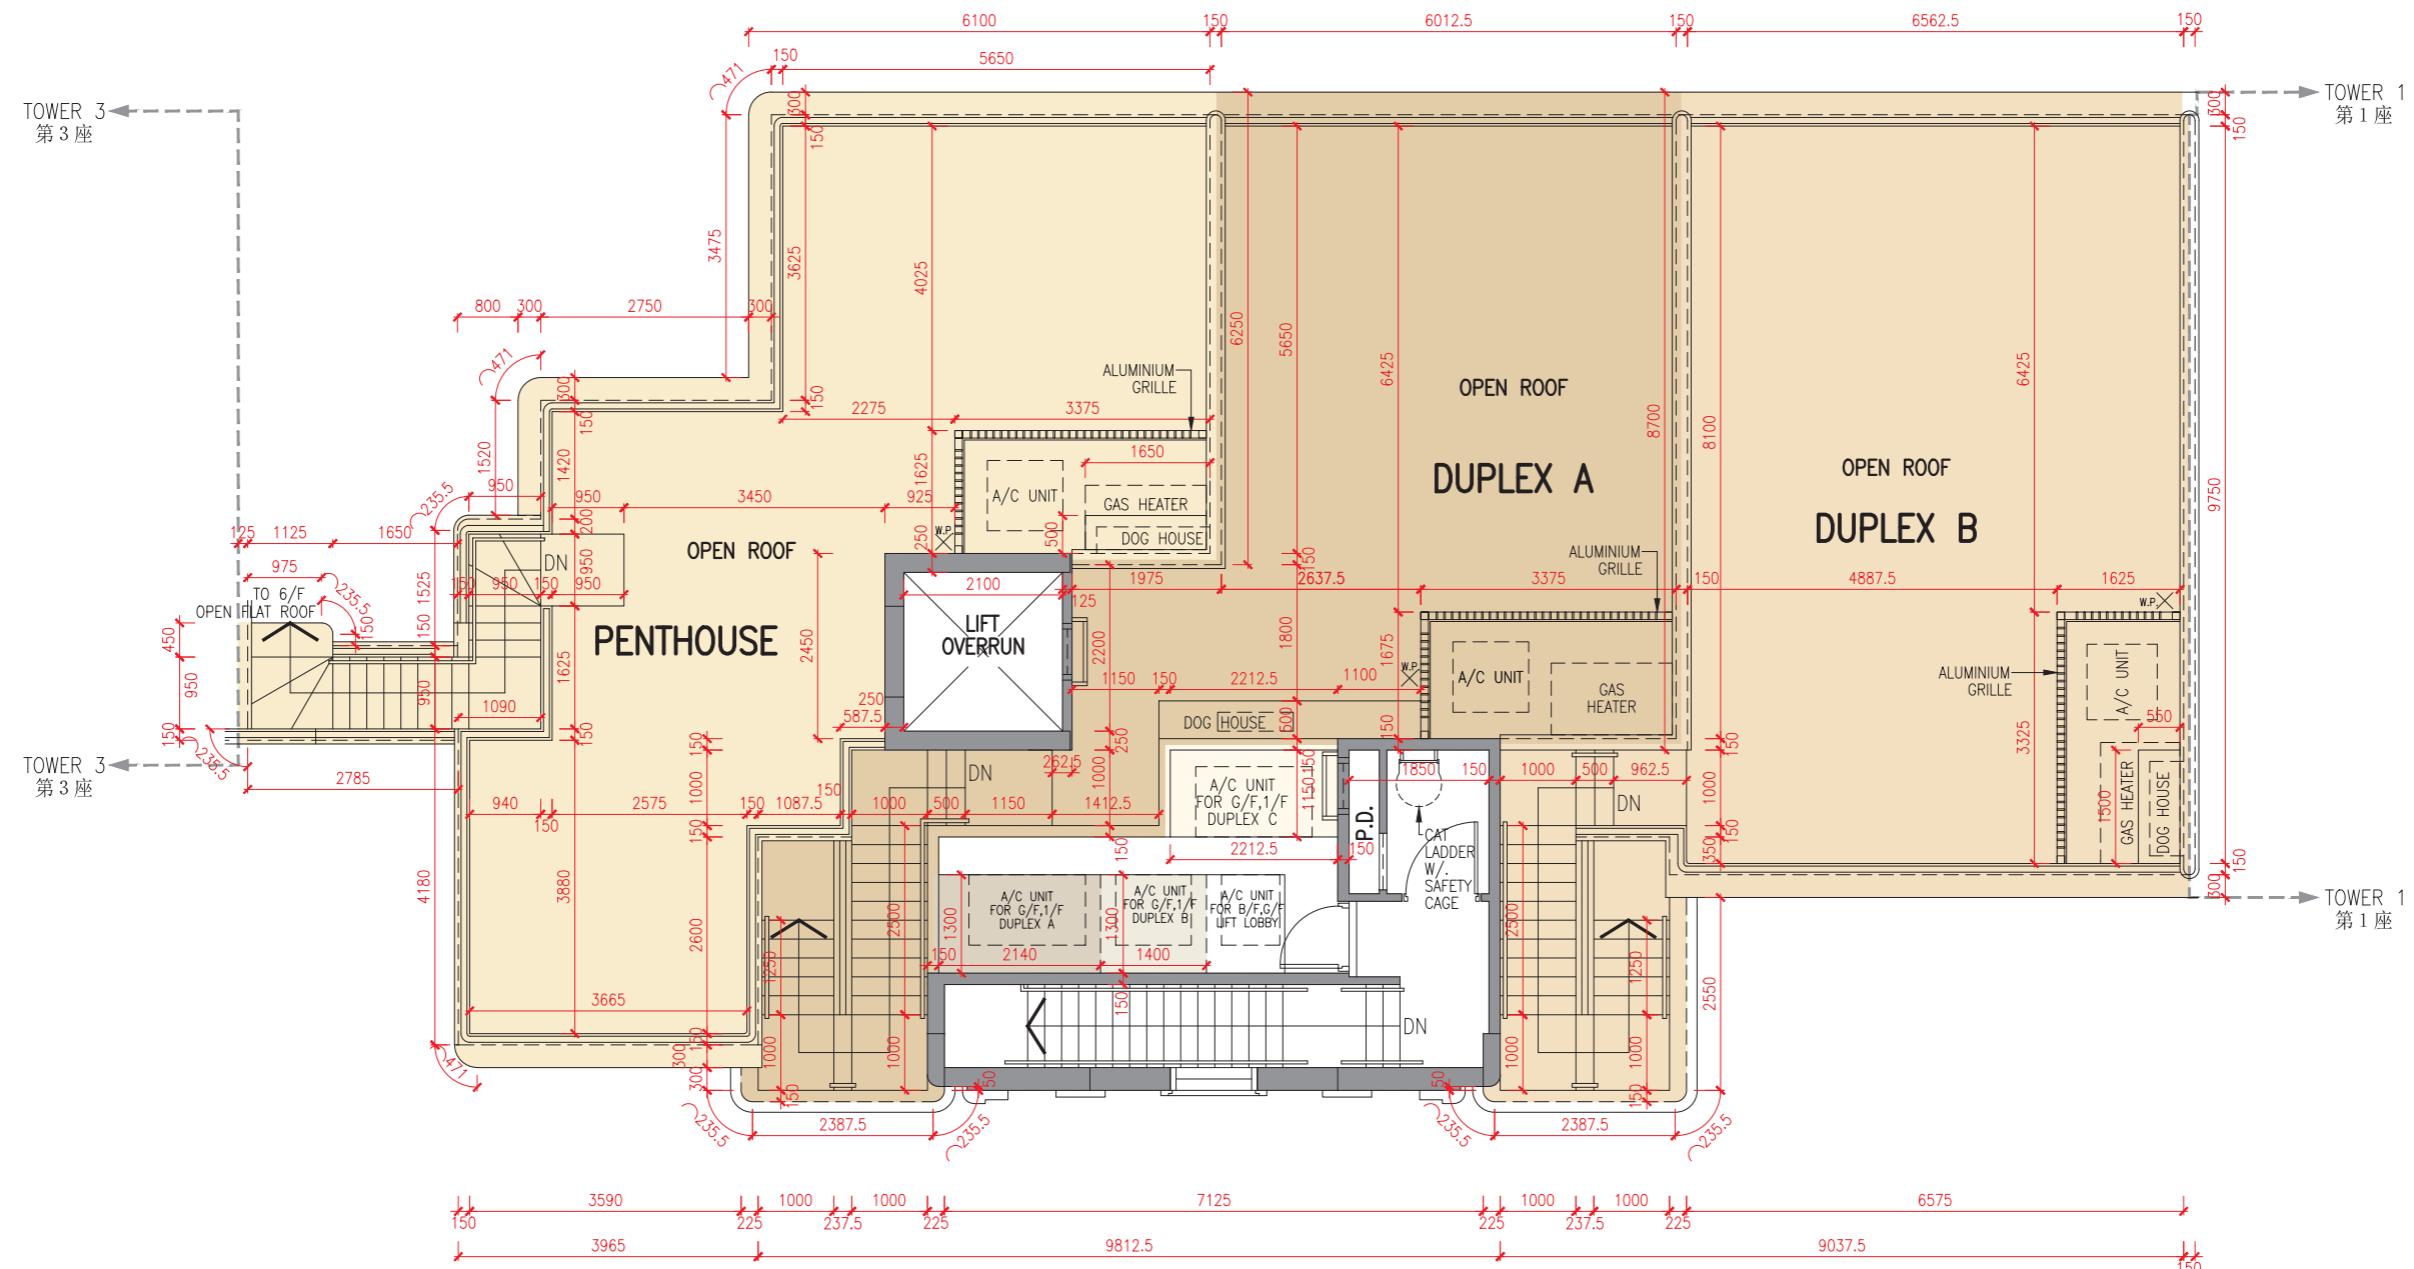
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第2座 Tower 2	6樓 6/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)			150	150, 175	150, 175, 200, 225	150, 175, 200, 225

第2座 Tower 2

天台平面圖
Roof Plan

比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

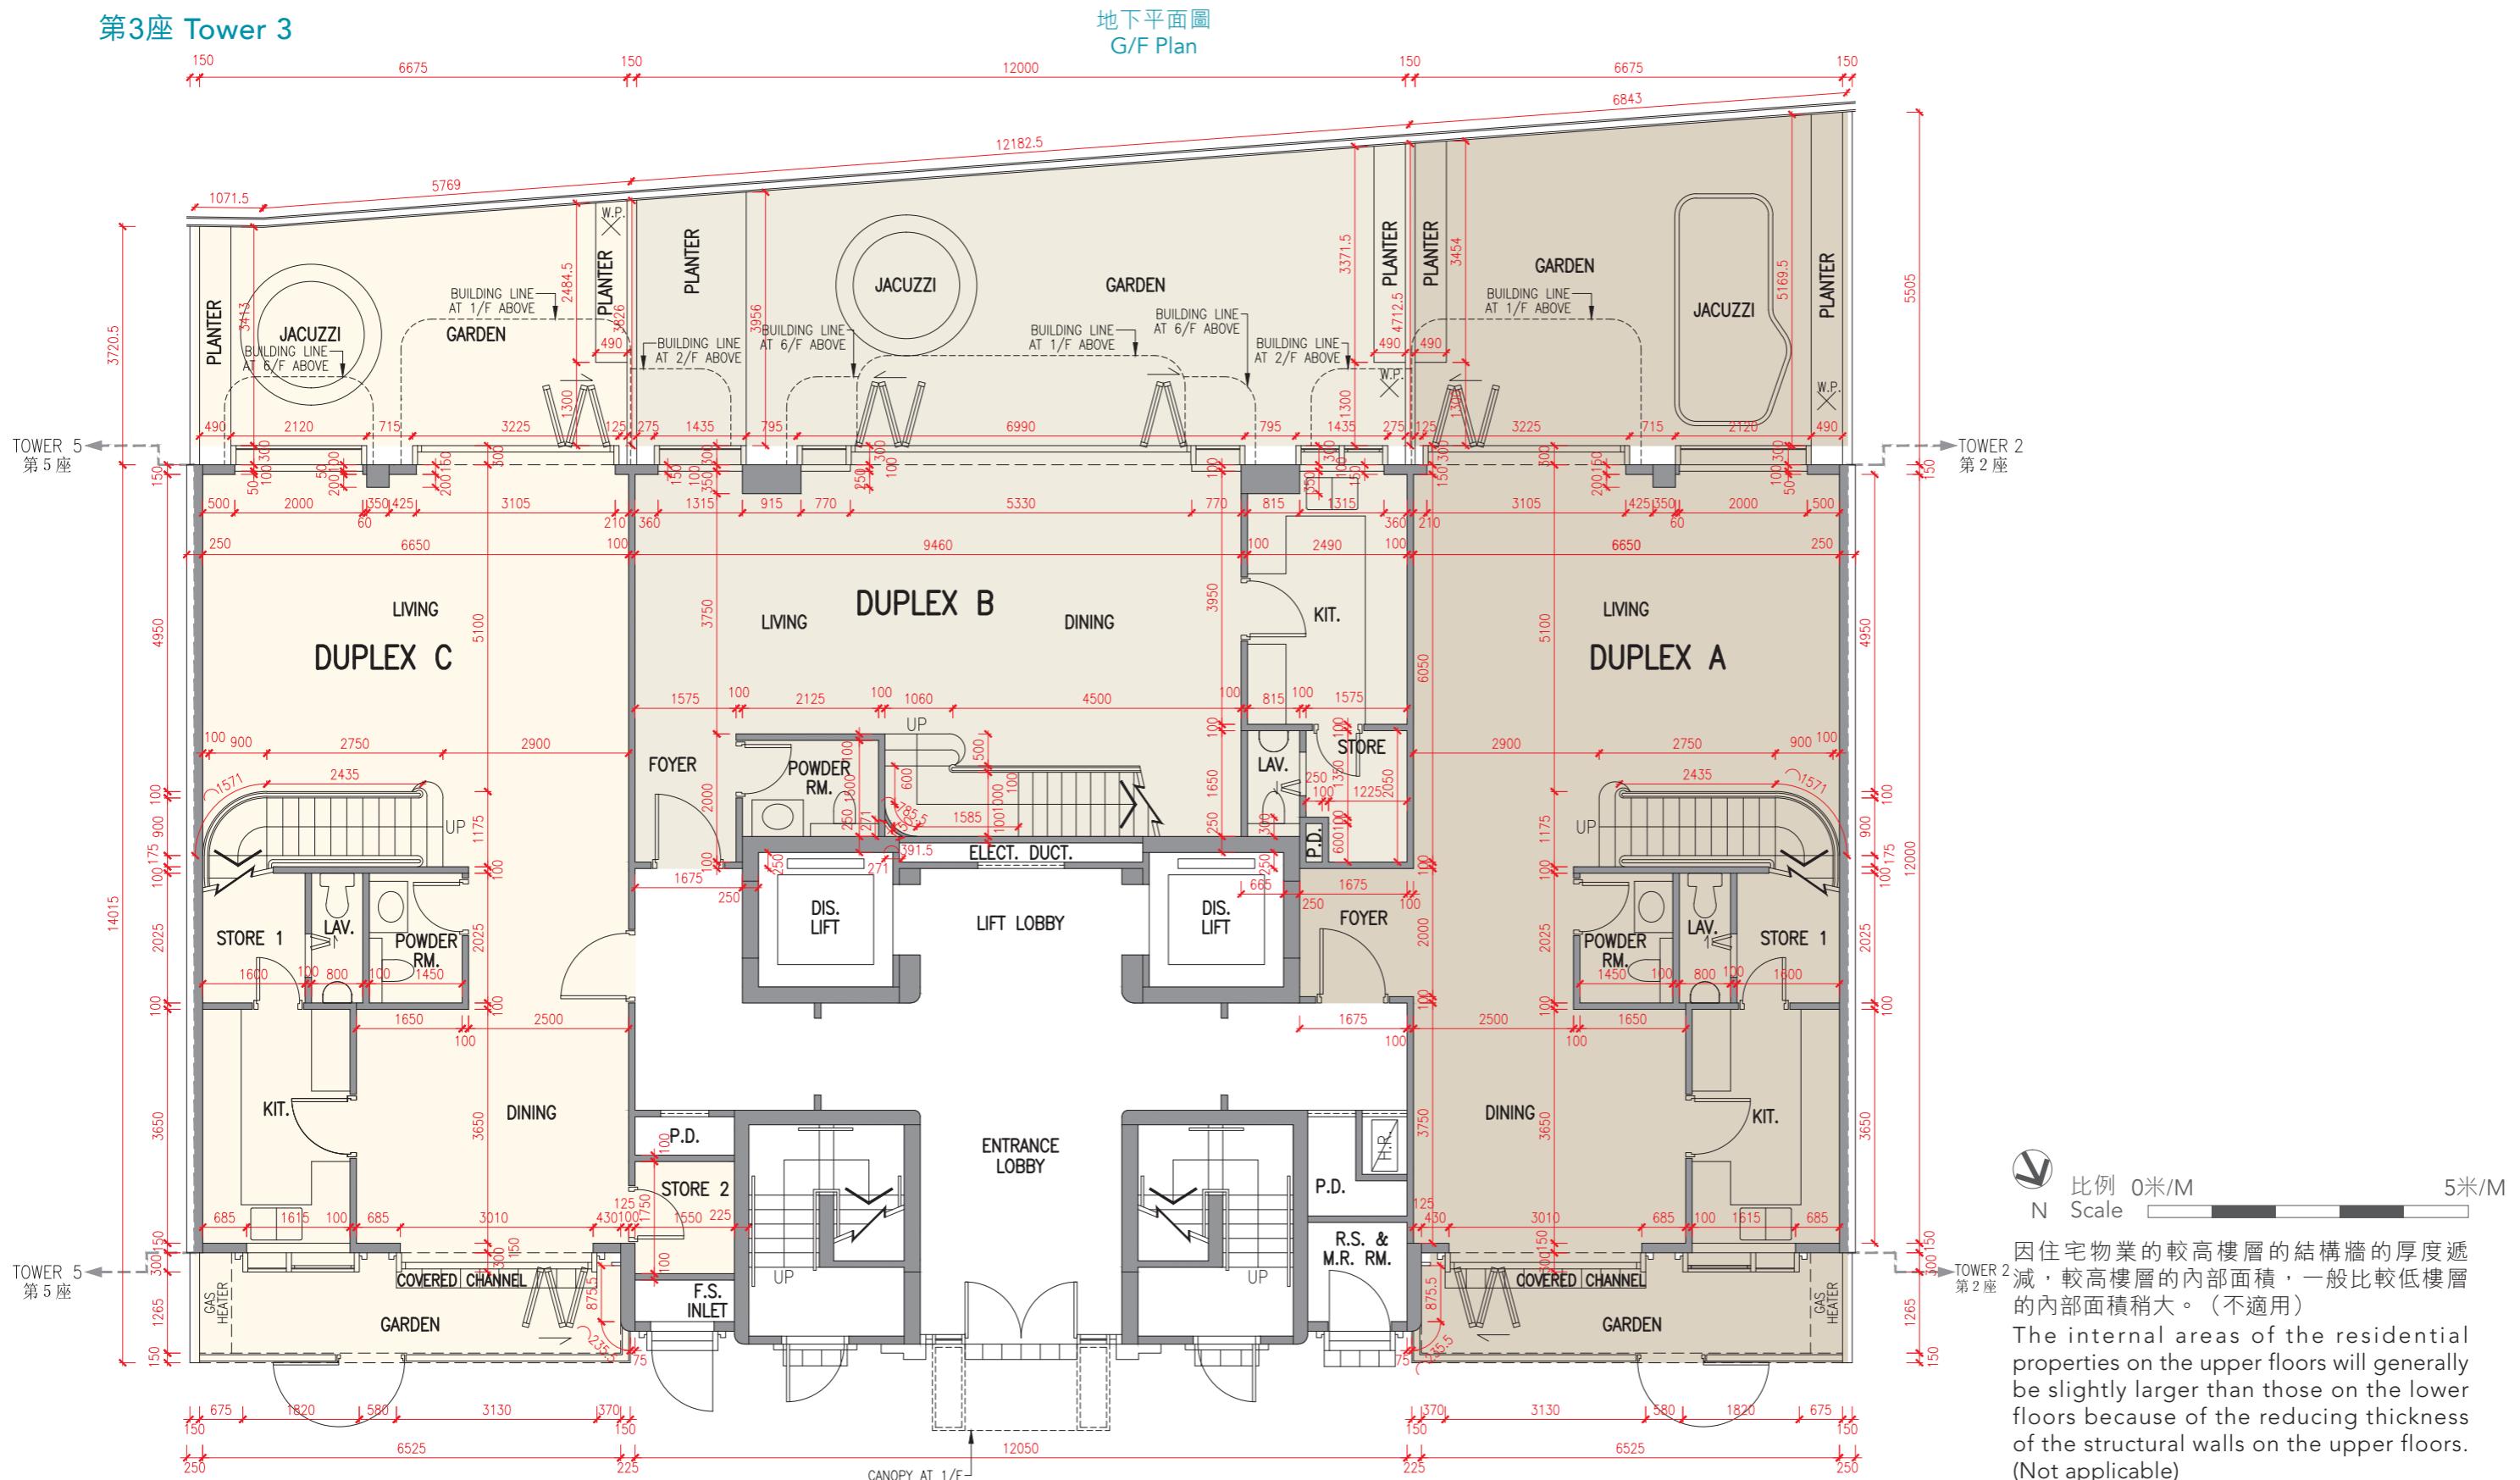
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第2座 Tower 2	天台 Roof			不適用 N/A	
樓板厚度 (毫米) Thickness of the floor slabs (mm)						

第3座 Tower 3



	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	C複式單位 Duplex C
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第3座 Tower 3	地下 G/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				200, 250	200, 225, 250	200, 250

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。
- 第3座地下及1樓A複式單位、B複式單位及C複式單位的空調機室外機安裝於此座天台上。

Notes:

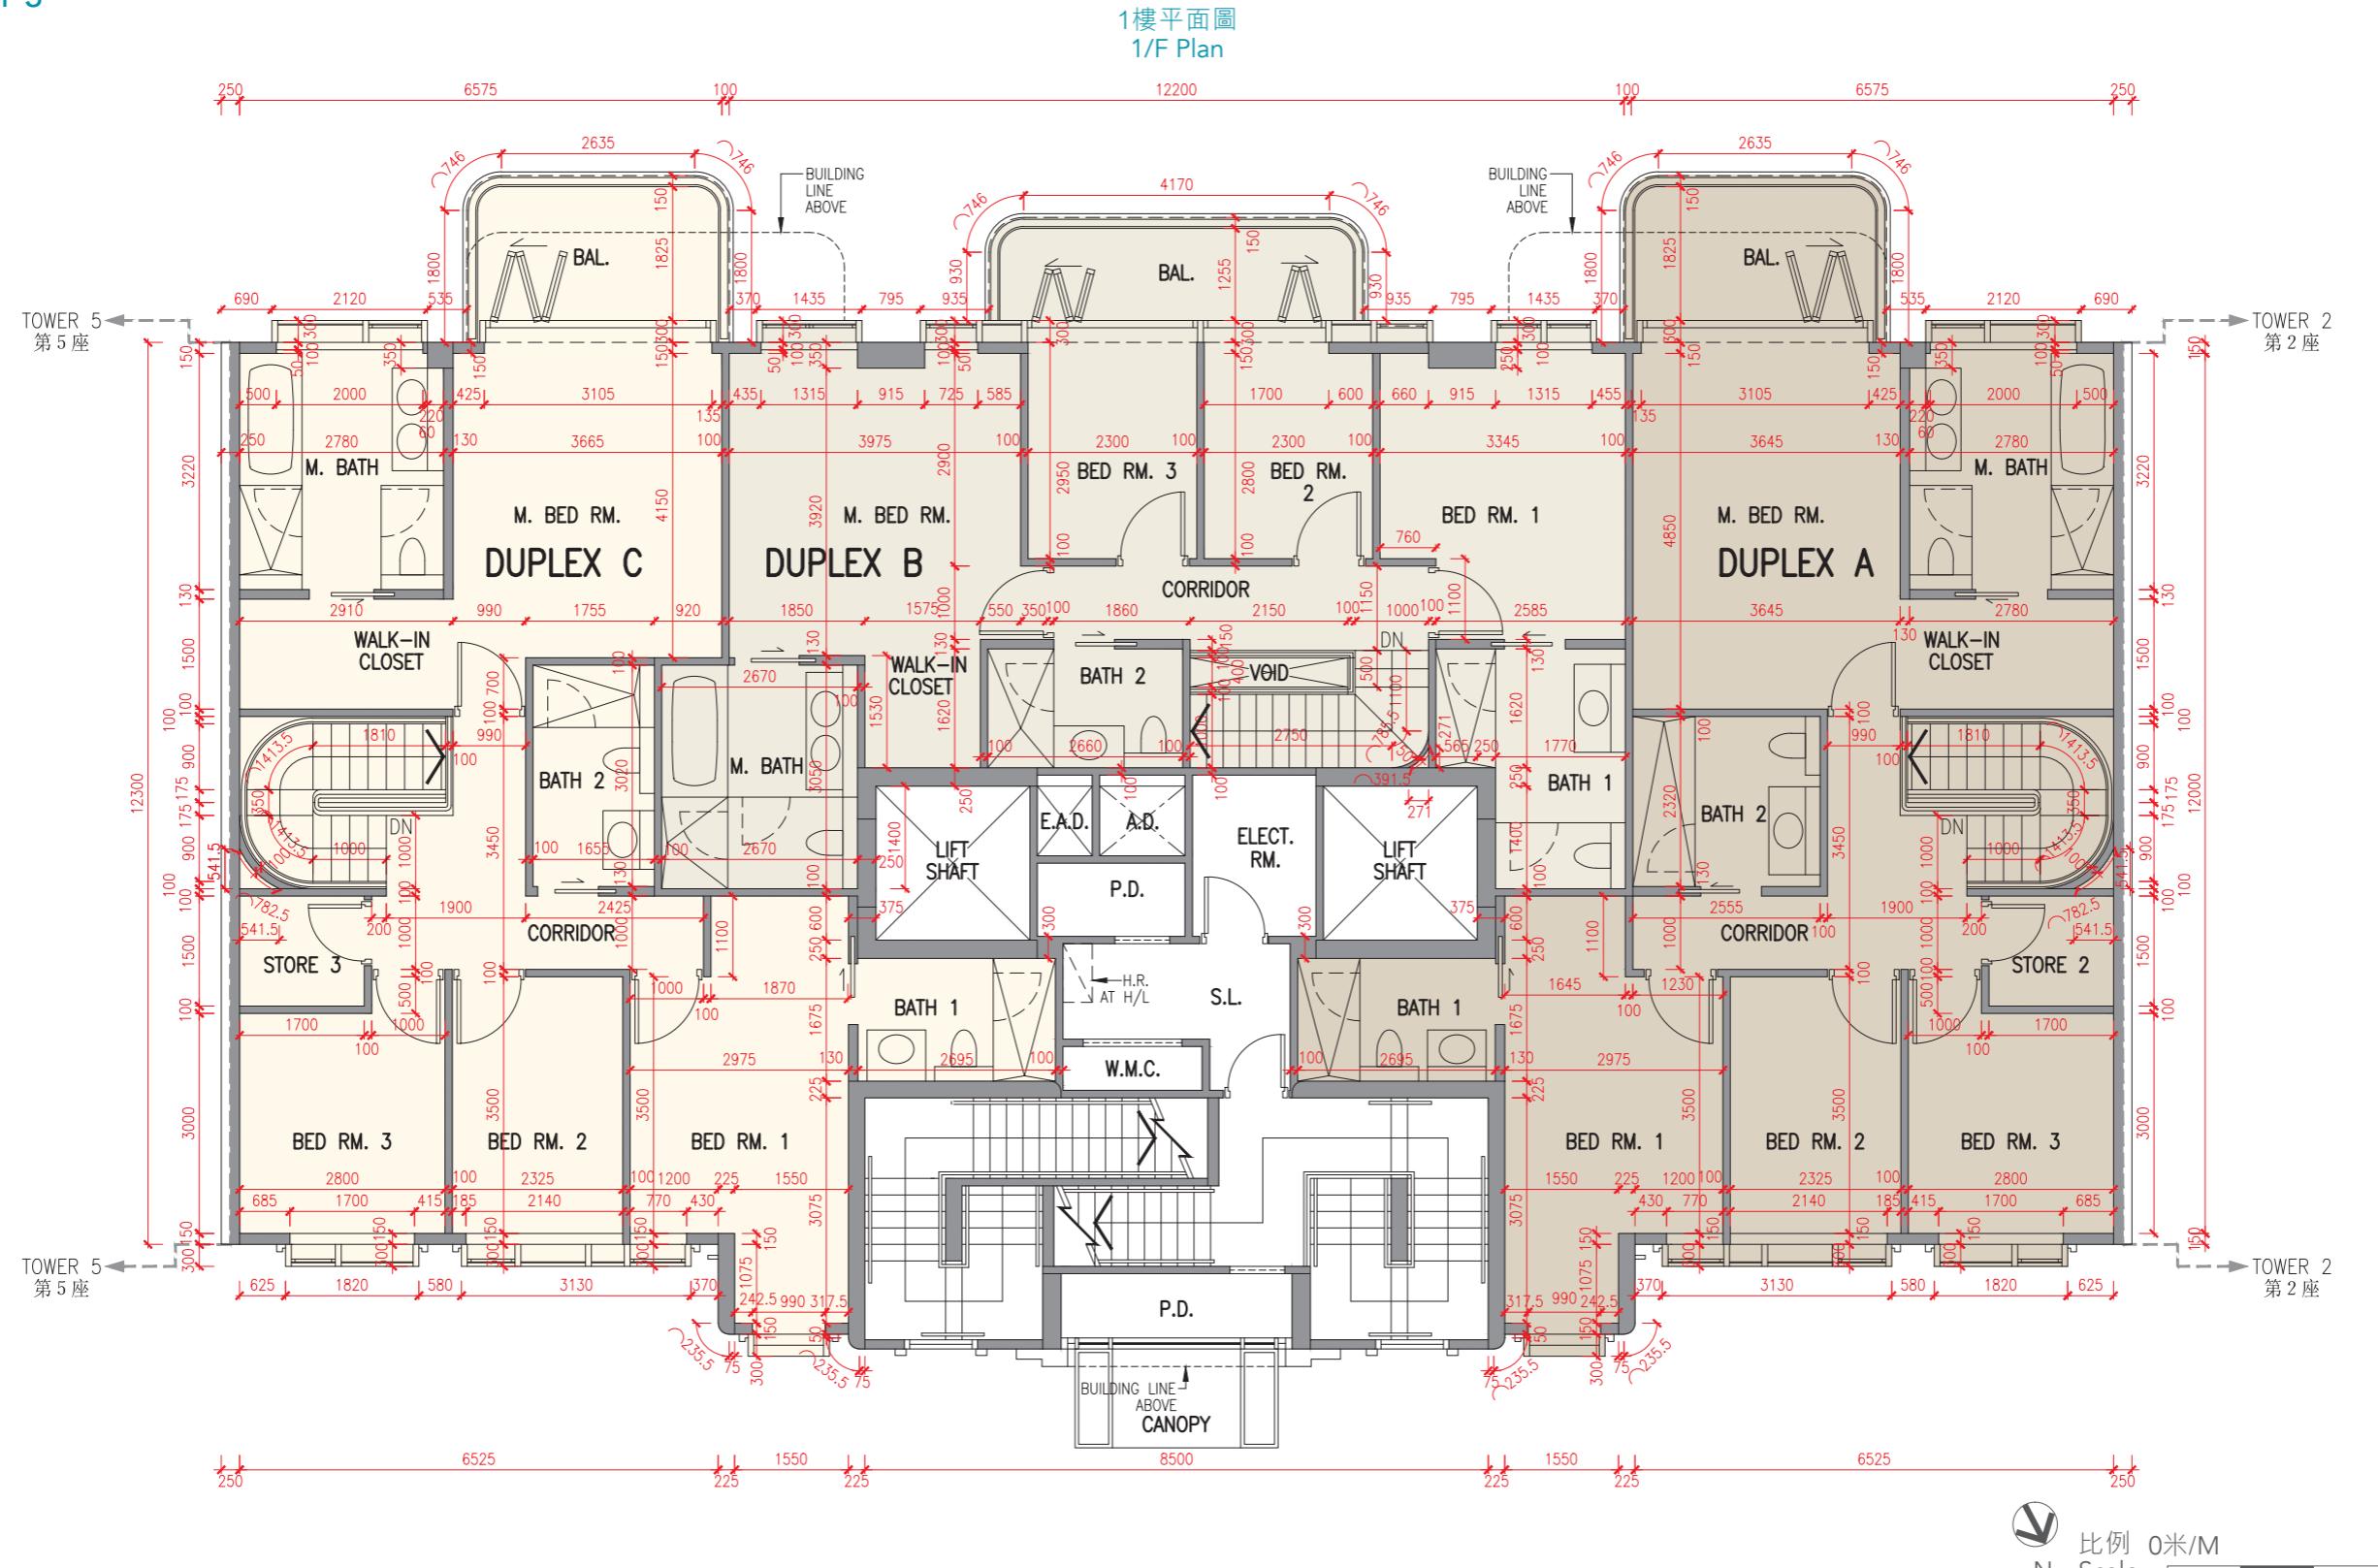
- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.
- The air-conditioning outdoor unit(s) for Duplex A, Duplex B and Duplex C on G/F and 1/F of Tower 3 is/are located on the roof of the Tower.

N 比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
(Not applicable)

第3座 Tower 3



	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	C複式單位 Duplex C
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第3座 Tower 3	1樓 1/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 200	150, 200	150, 200

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

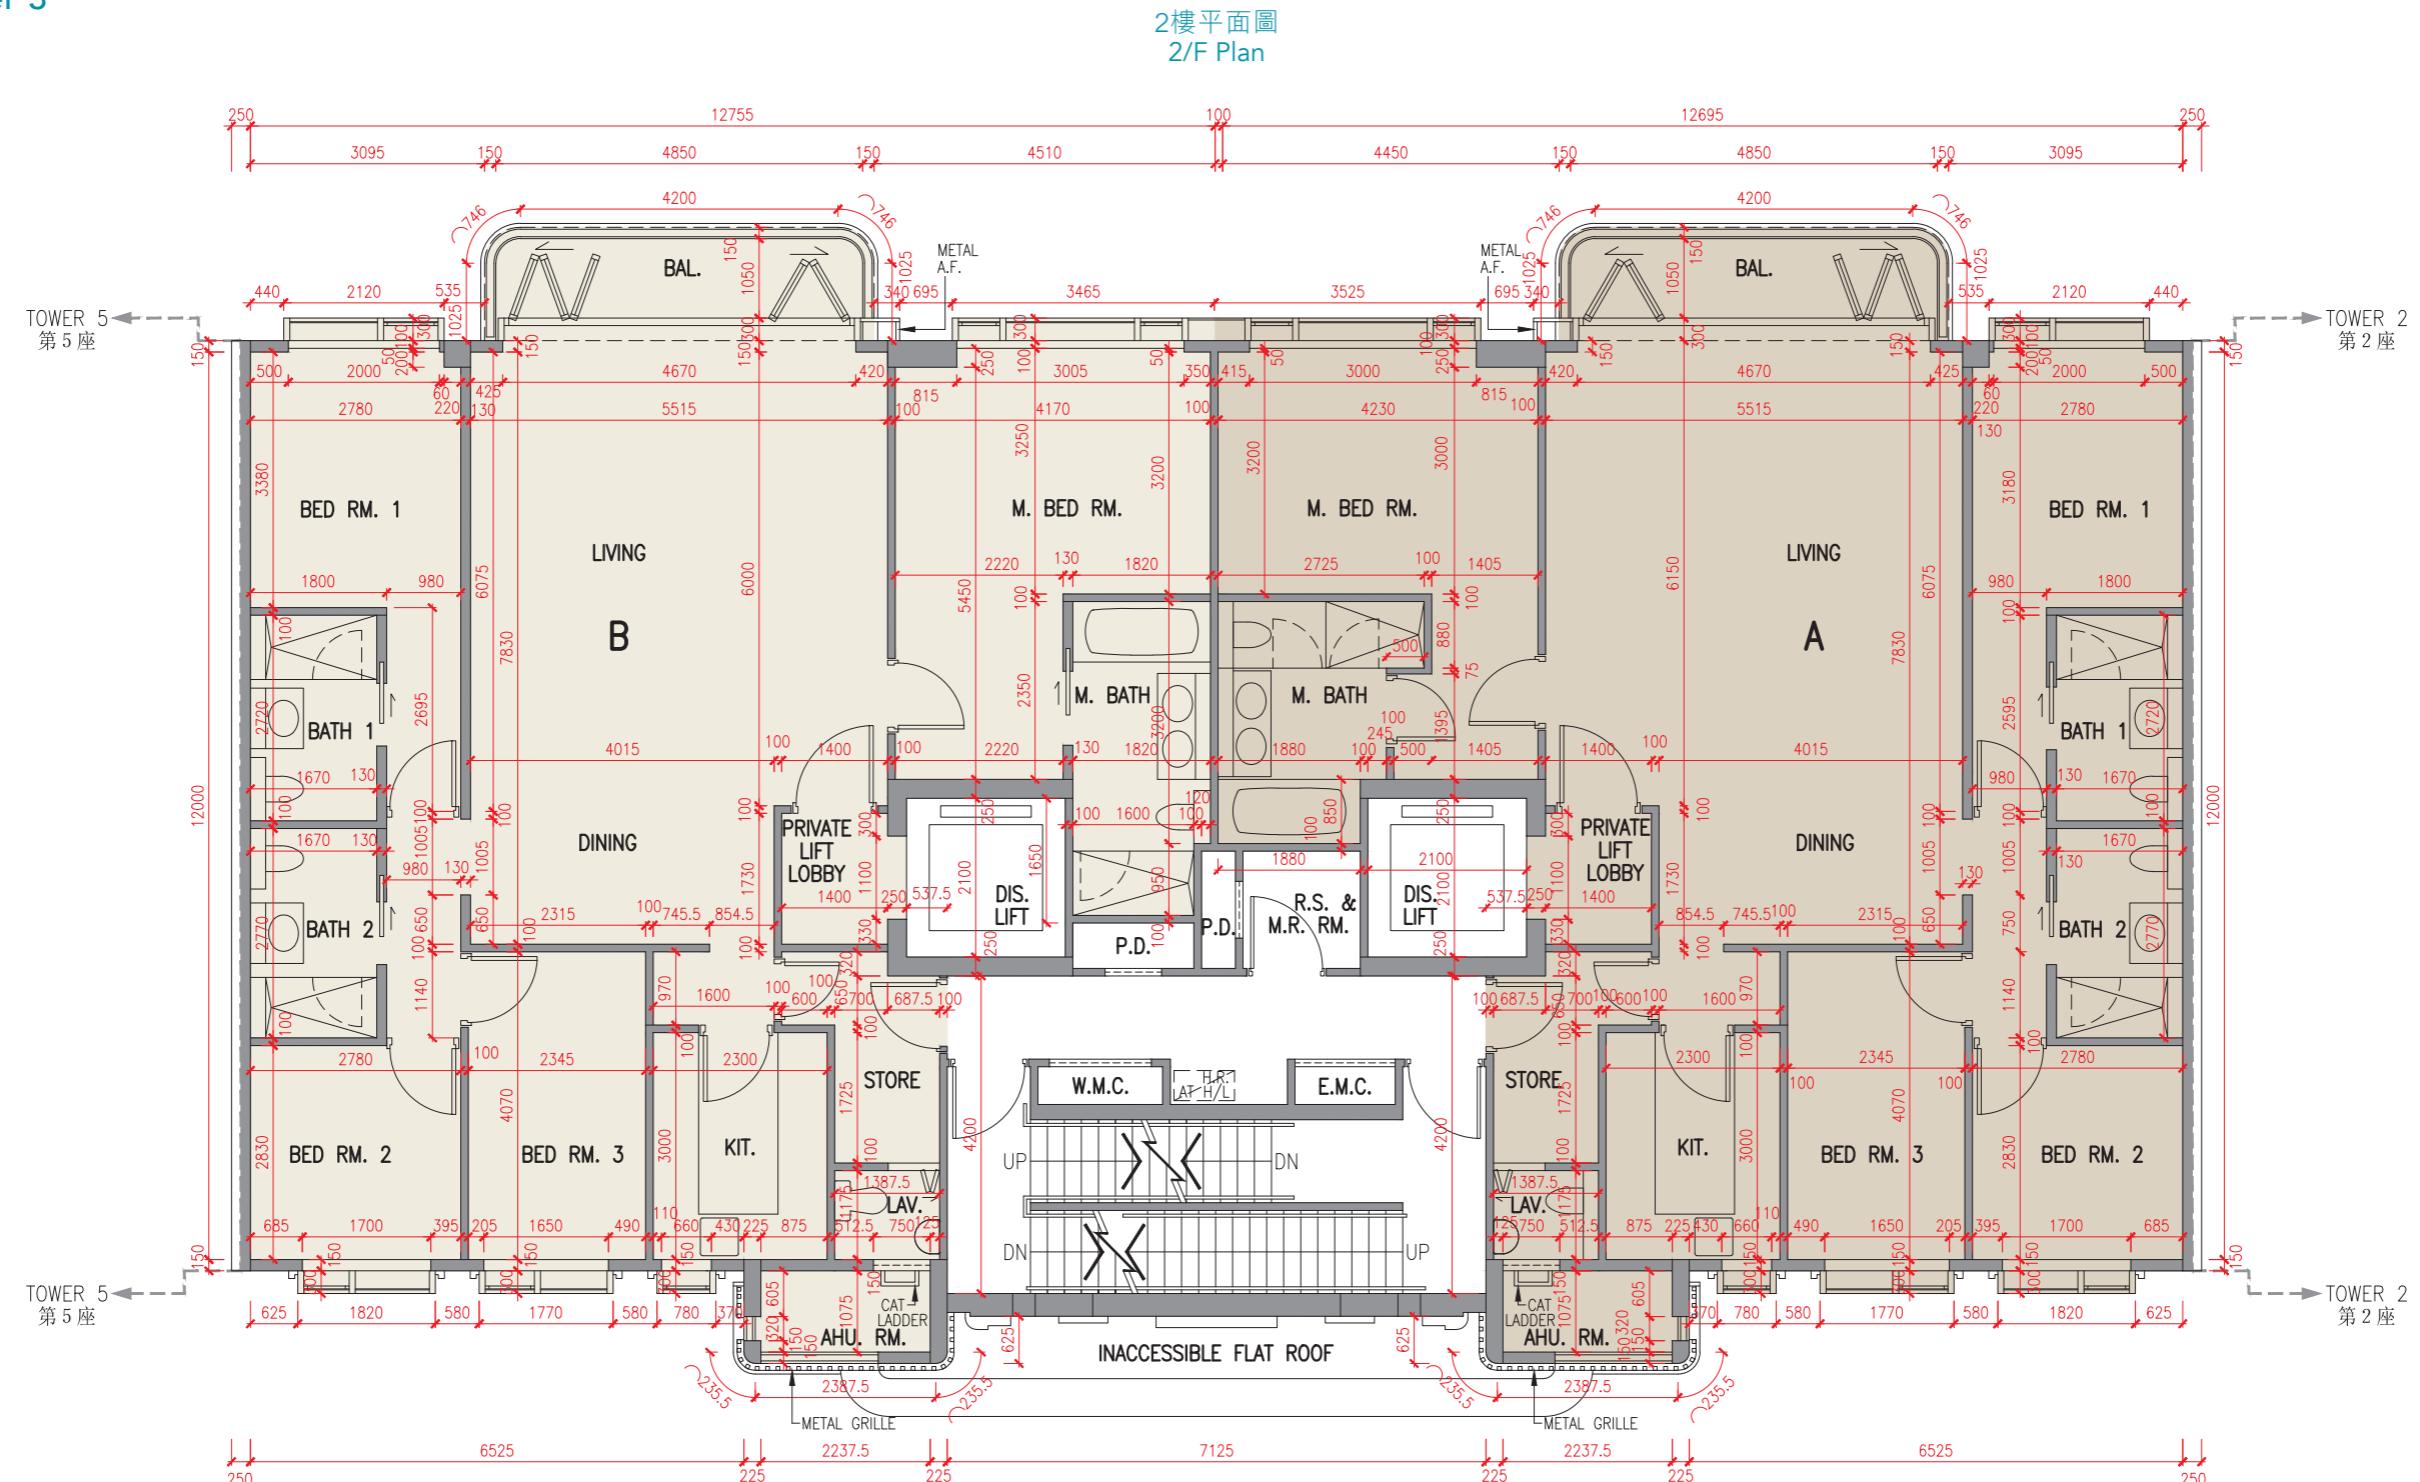
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。
- 第3座地下及1樓A複式單位、B複式單位及C複式單位的空調機室外機安裝於此座天台上。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.
- The air-conditioning outdoor unit(s) for Duplex A, Duplex B and Duplex C on G/F and 1/F of Tower 3 is/are located on the roof of the Tower.

第3座 Tower 3

比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

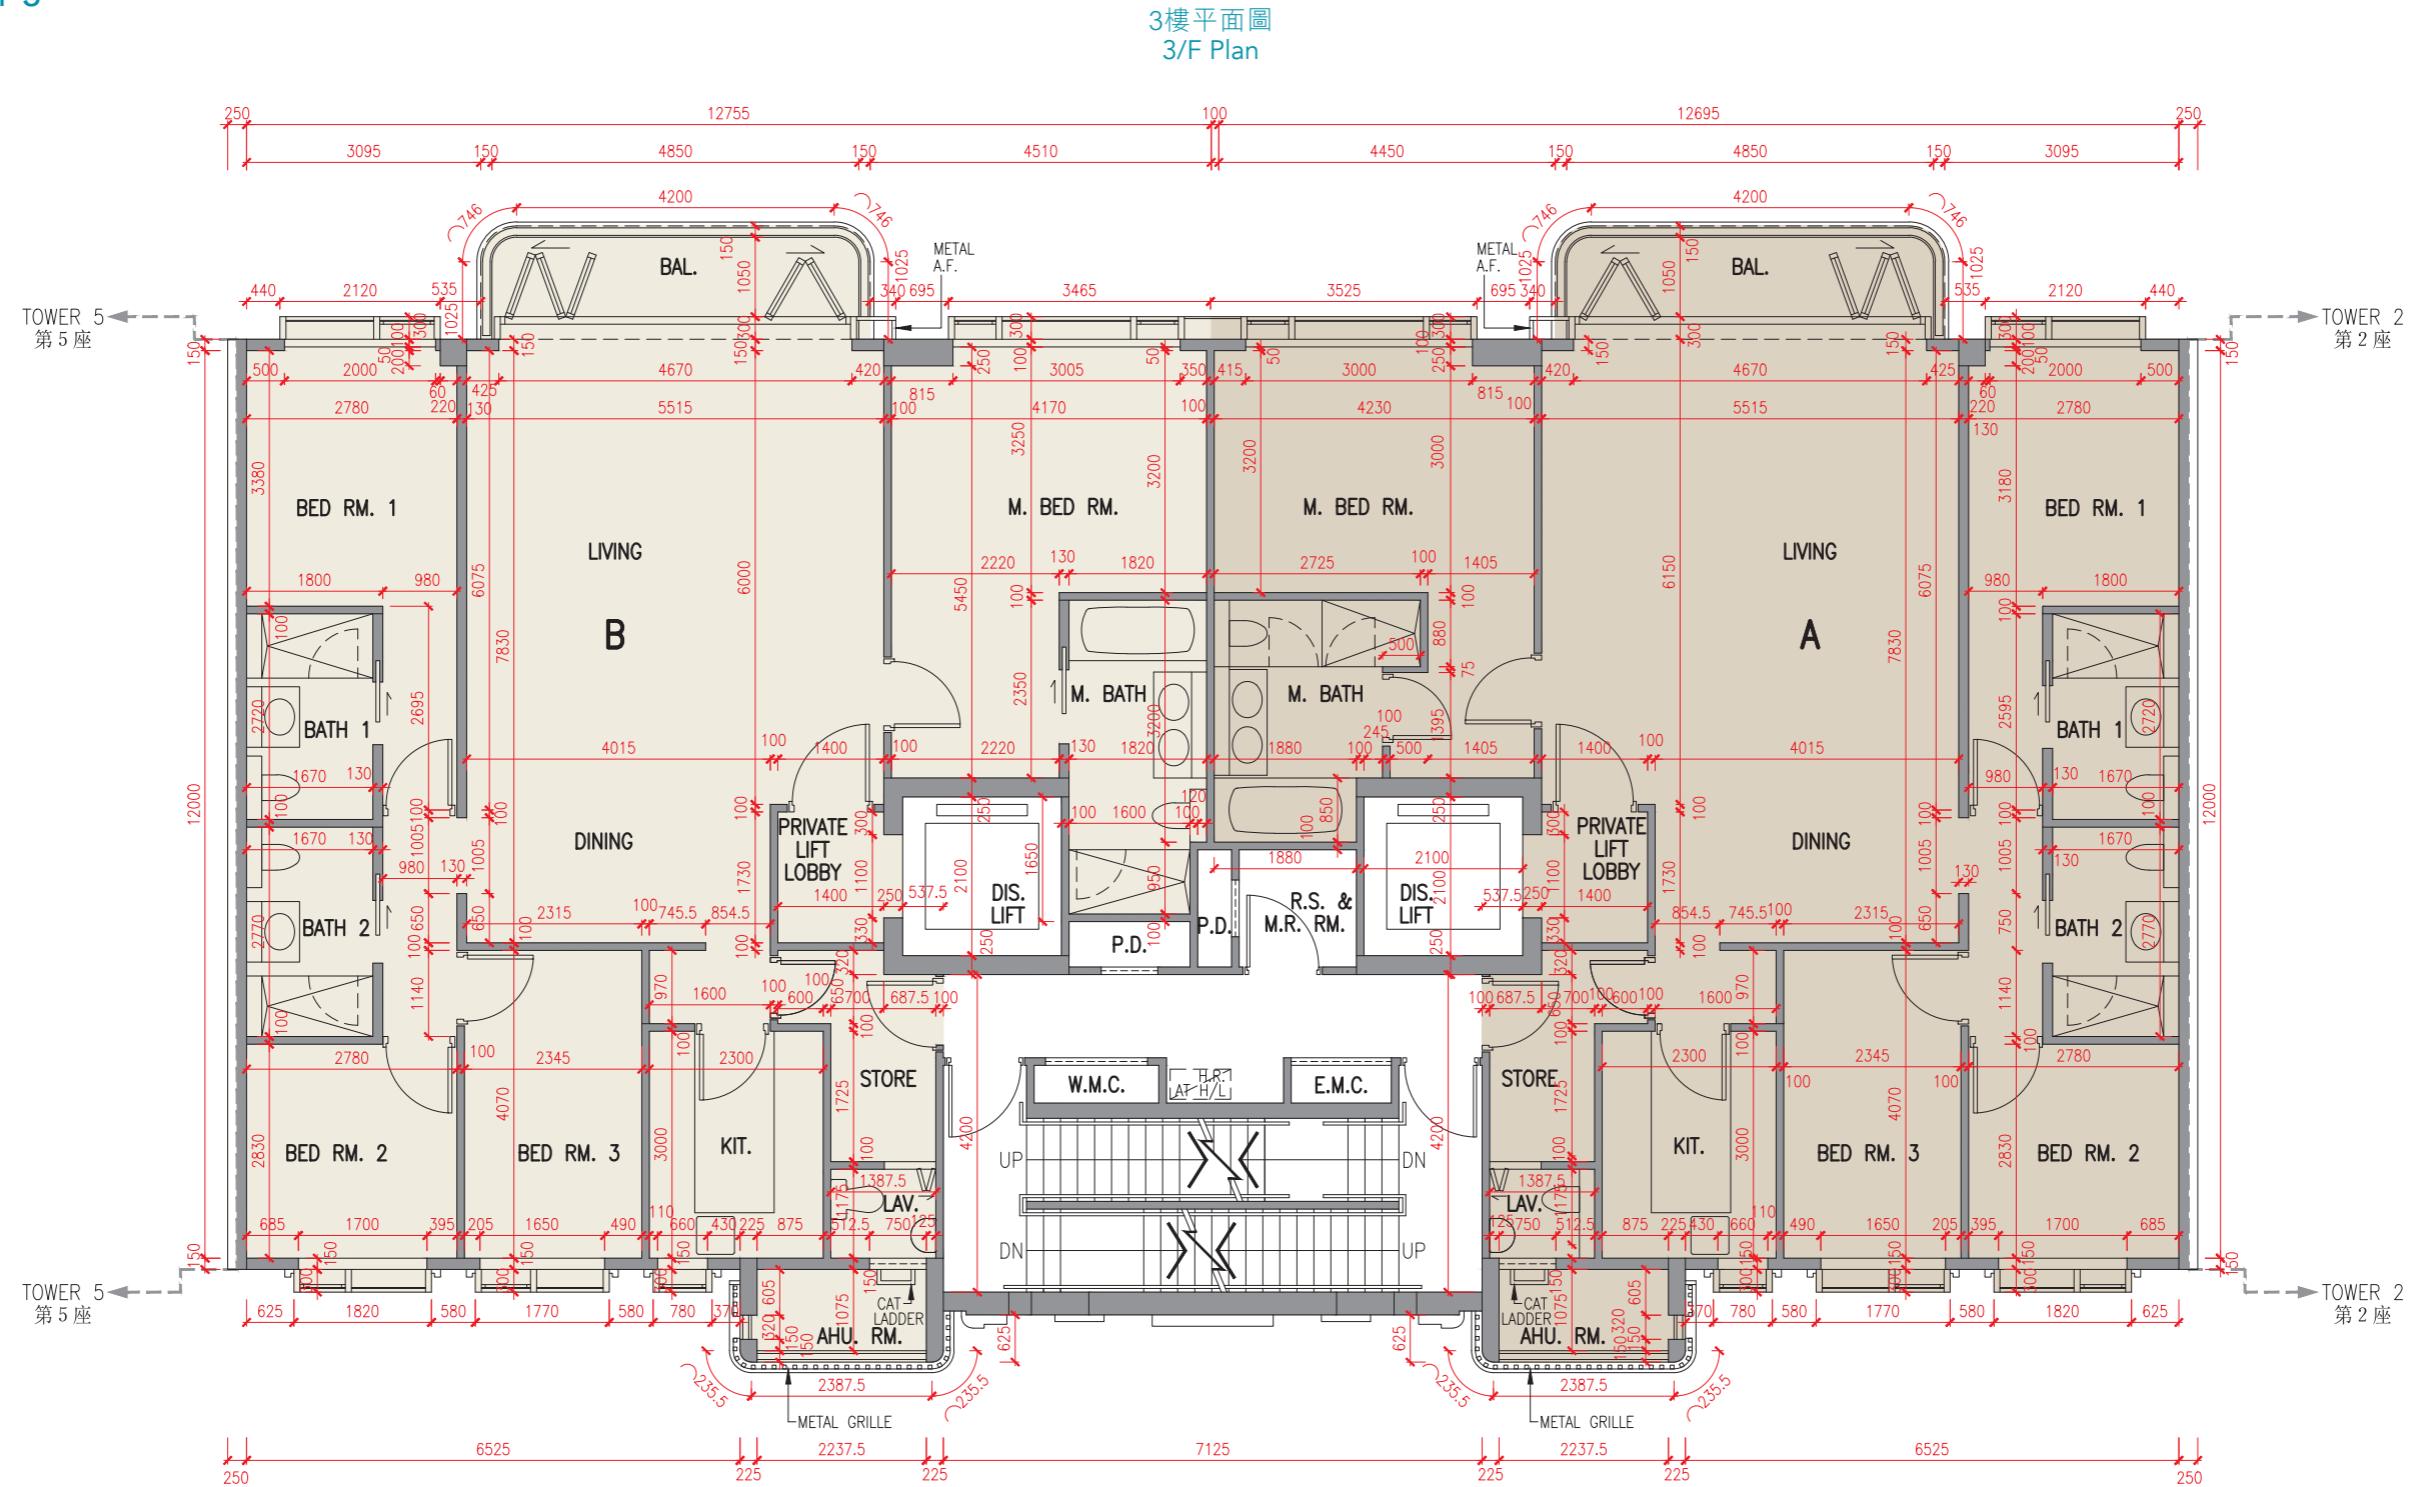
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A單位 Flat A	B單位 Flat B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第3座 Tower 3	2樓 2/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175, 200	150, 175, 200

第3座 Tower 3



比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

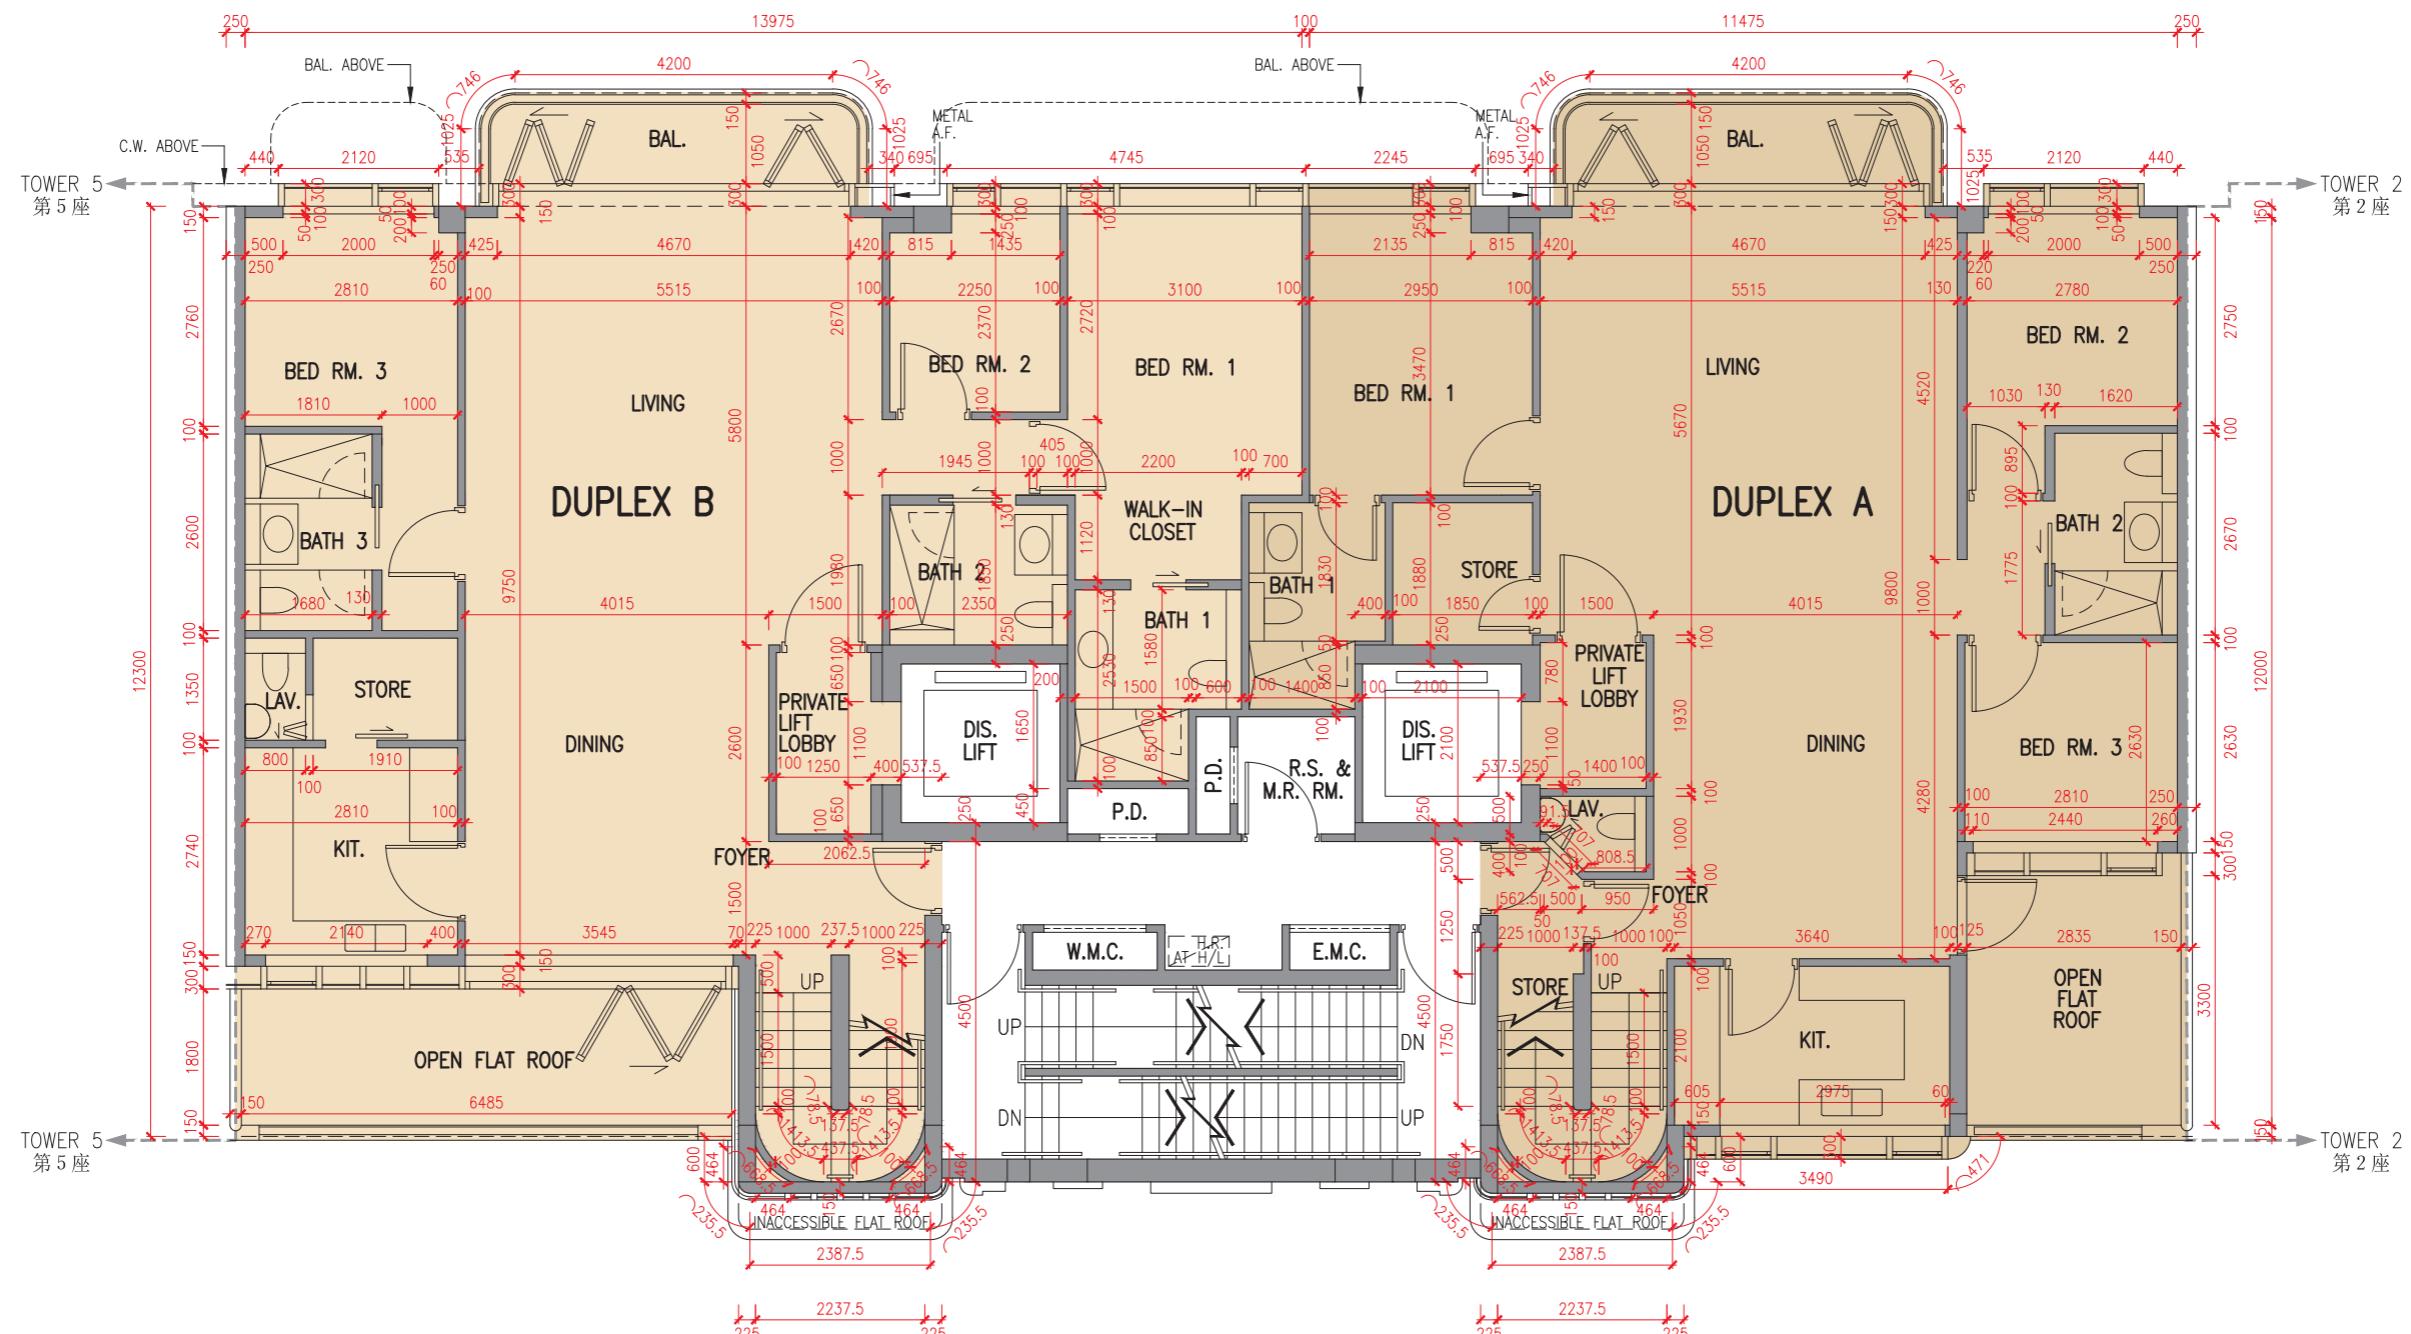
	座 Tower	樓層 Floor	單位 Unit	A單位 Flat A	B單位 Flat B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第3座 Tower 3	3樓 3/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175	150, 175

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

第3座 Tower 3

5樓平面圖
5/F Plan

比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

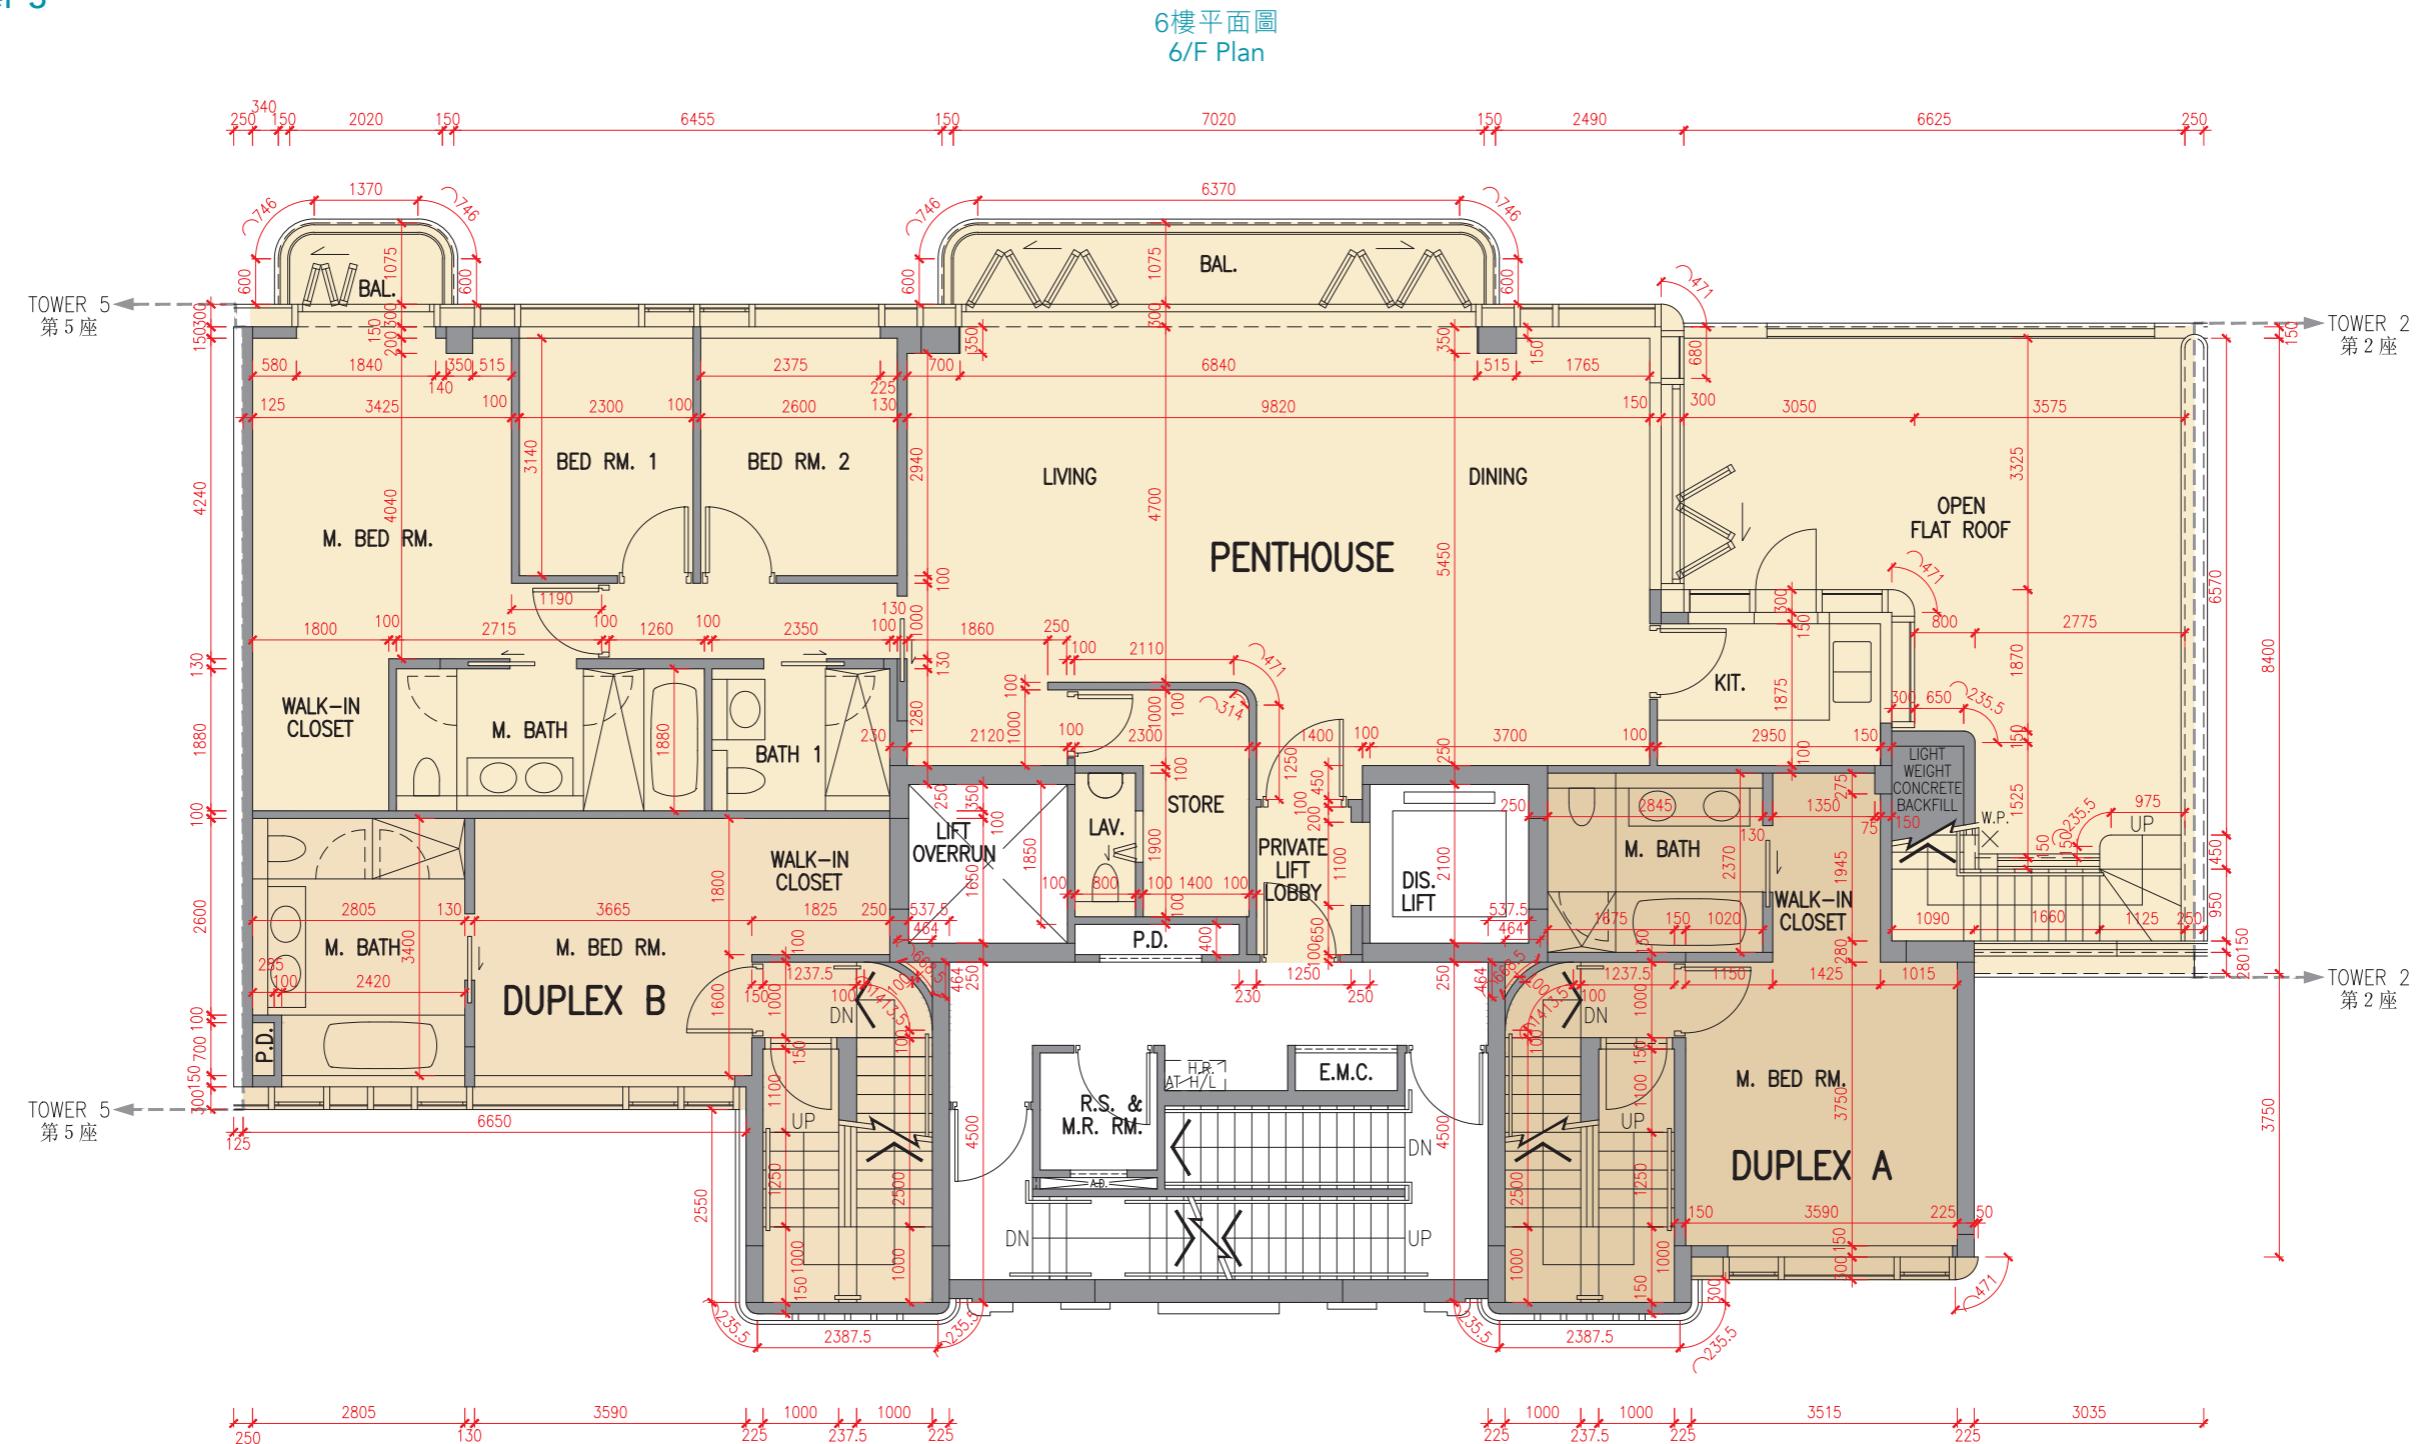
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第3座 Tower 3	5樓 5/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175, 200	150, 175, 200

第3座 Tower 3



比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

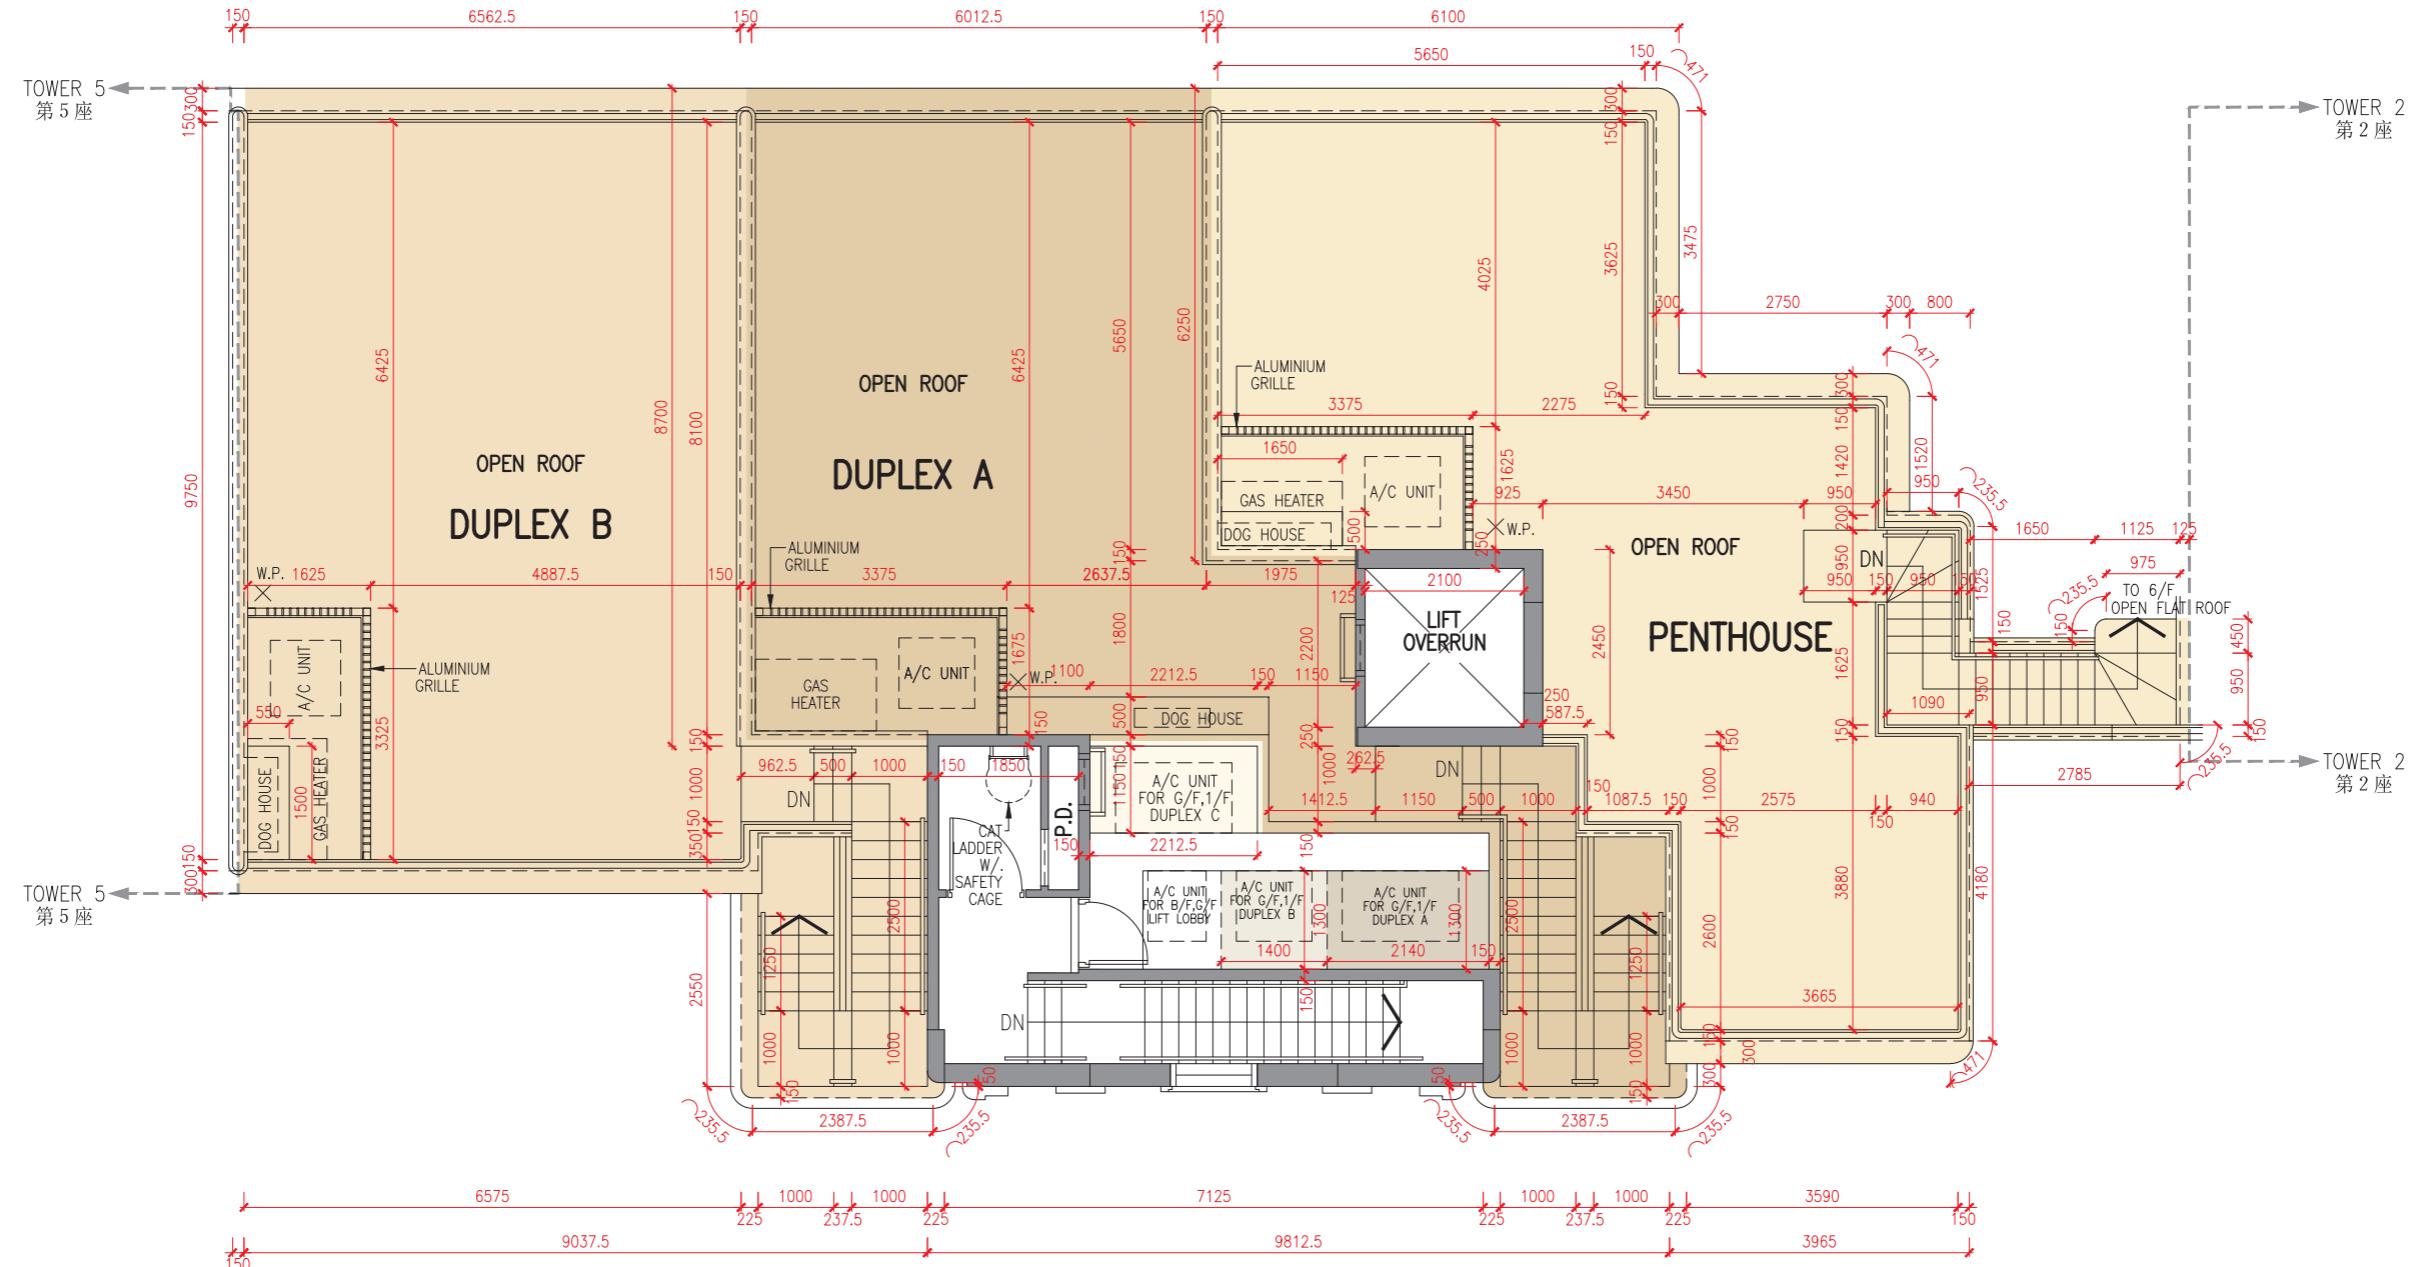
	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第3座 Tower 3	6樓 6/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150	150, 175	150, 175, 200, 225

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

第3座 Tower 3

天台平面圖
Roof Plan

比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

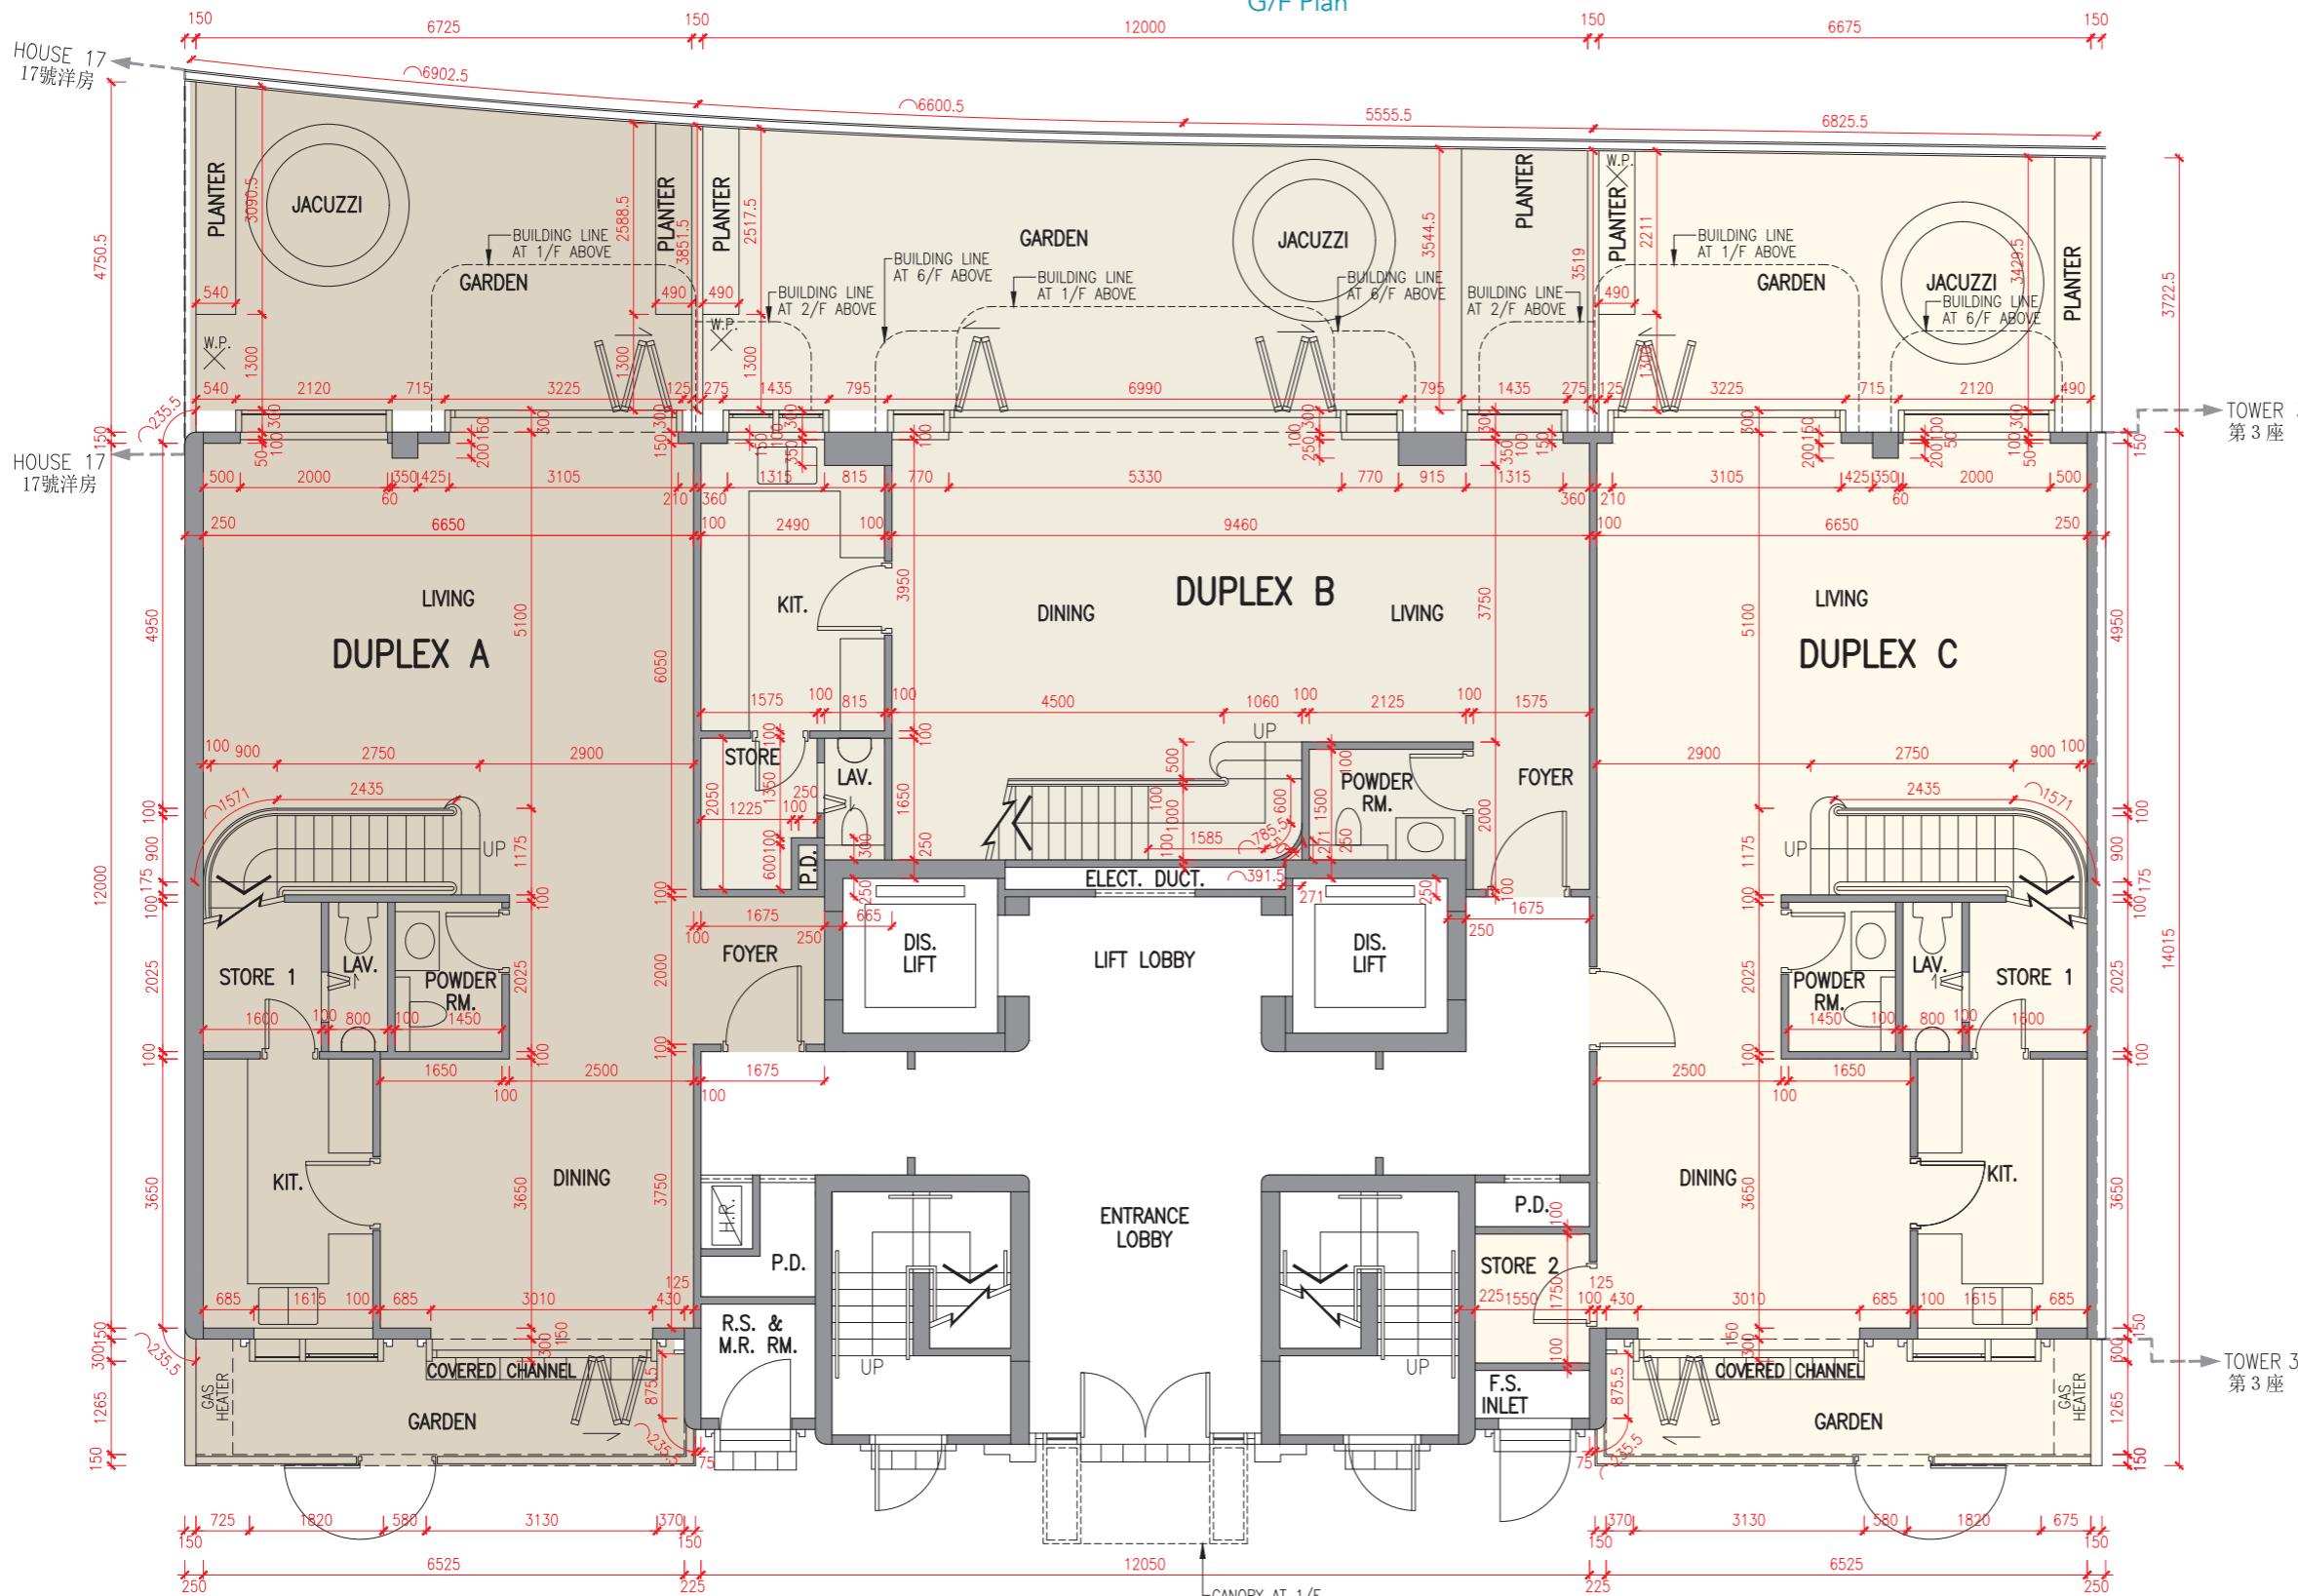
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第3座 Tower 3	天台 Roof			不適用 N/A	
樓板厚度 (毫米) Thickness of the floor slabs (mm)						

第5座 Tower 5



比例 0米/M
N Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
(Not applicable)

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	C複式單位 Duplex C
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第5座 Tower 5	地下 G/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				200, 250	200, 225, 250	200, 250

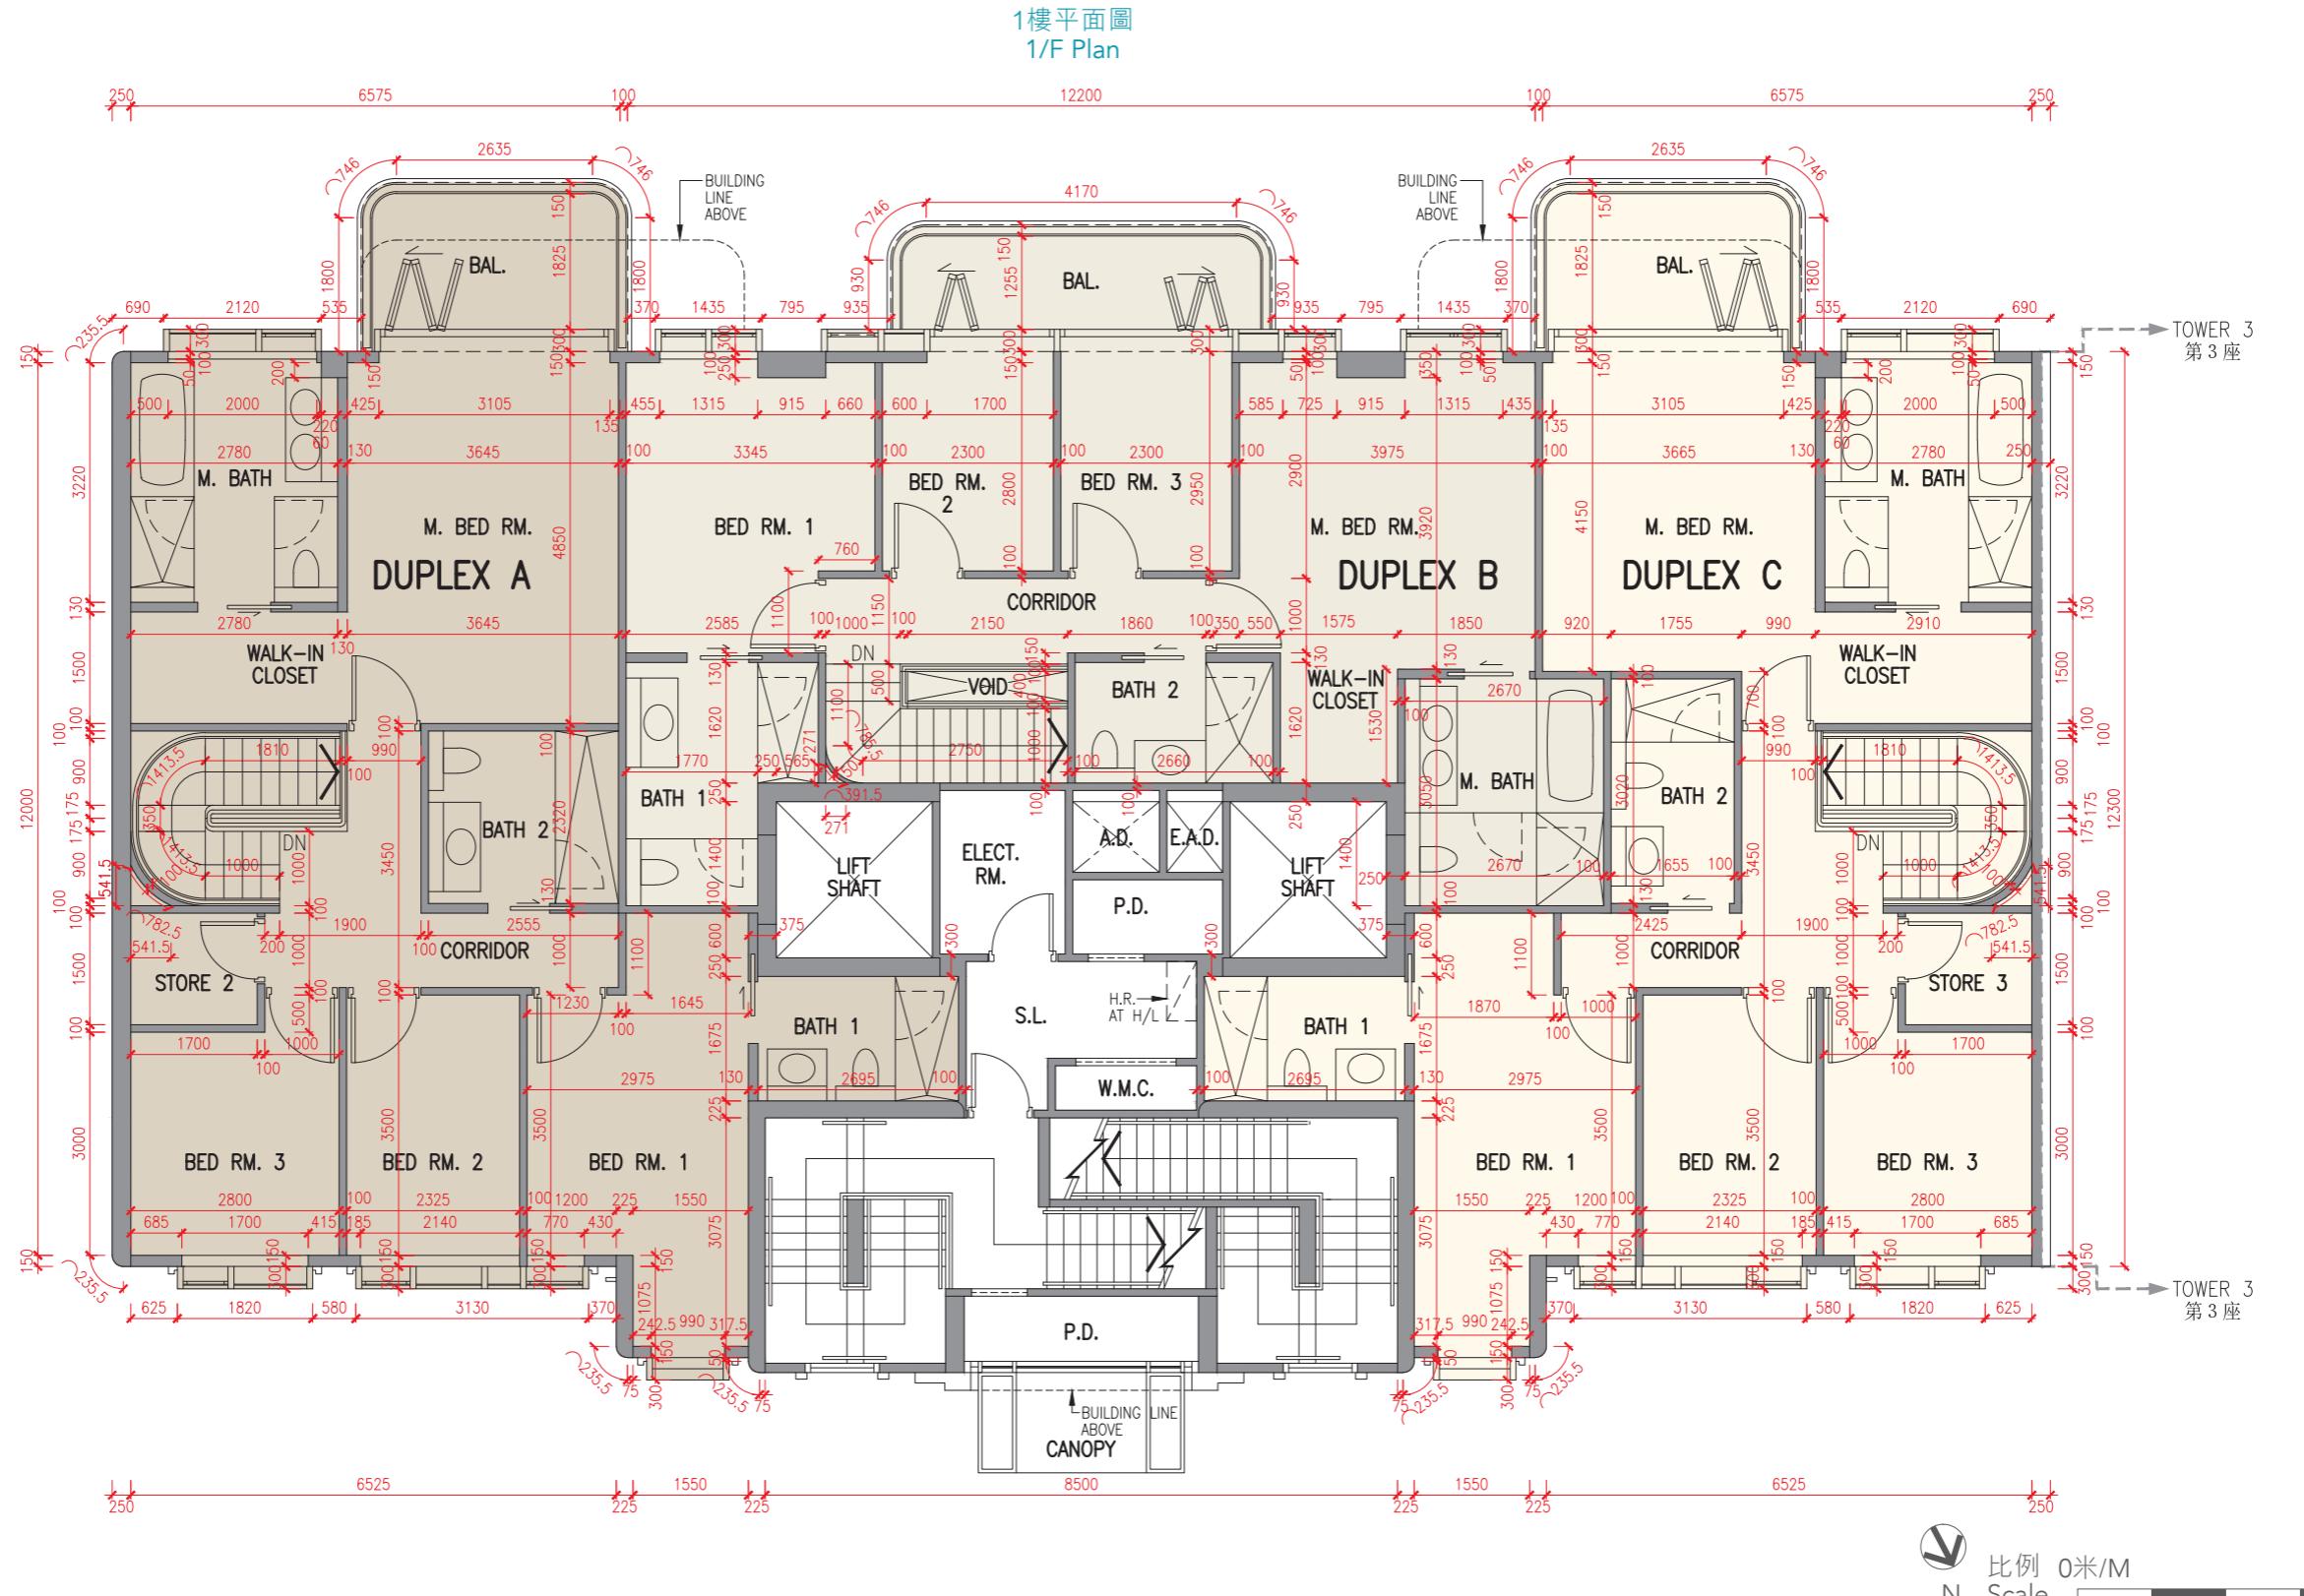
備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。
- 第5座地下及1樓A複式單位、B複式單位及C複式單位的空調機室外機安裝於此座天台上。

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.
- The air-conditioning outdoor unit(s) for Duplex A, Duplex B and Duplex C on G/F and 1/F of Tower 5 is/are located on the roof of the Tower.

第5座 Tower 5



	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	C複式單位 Duplex C
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第5座 Tower 5	1樓 1/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 200	150, 200	150, 200

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

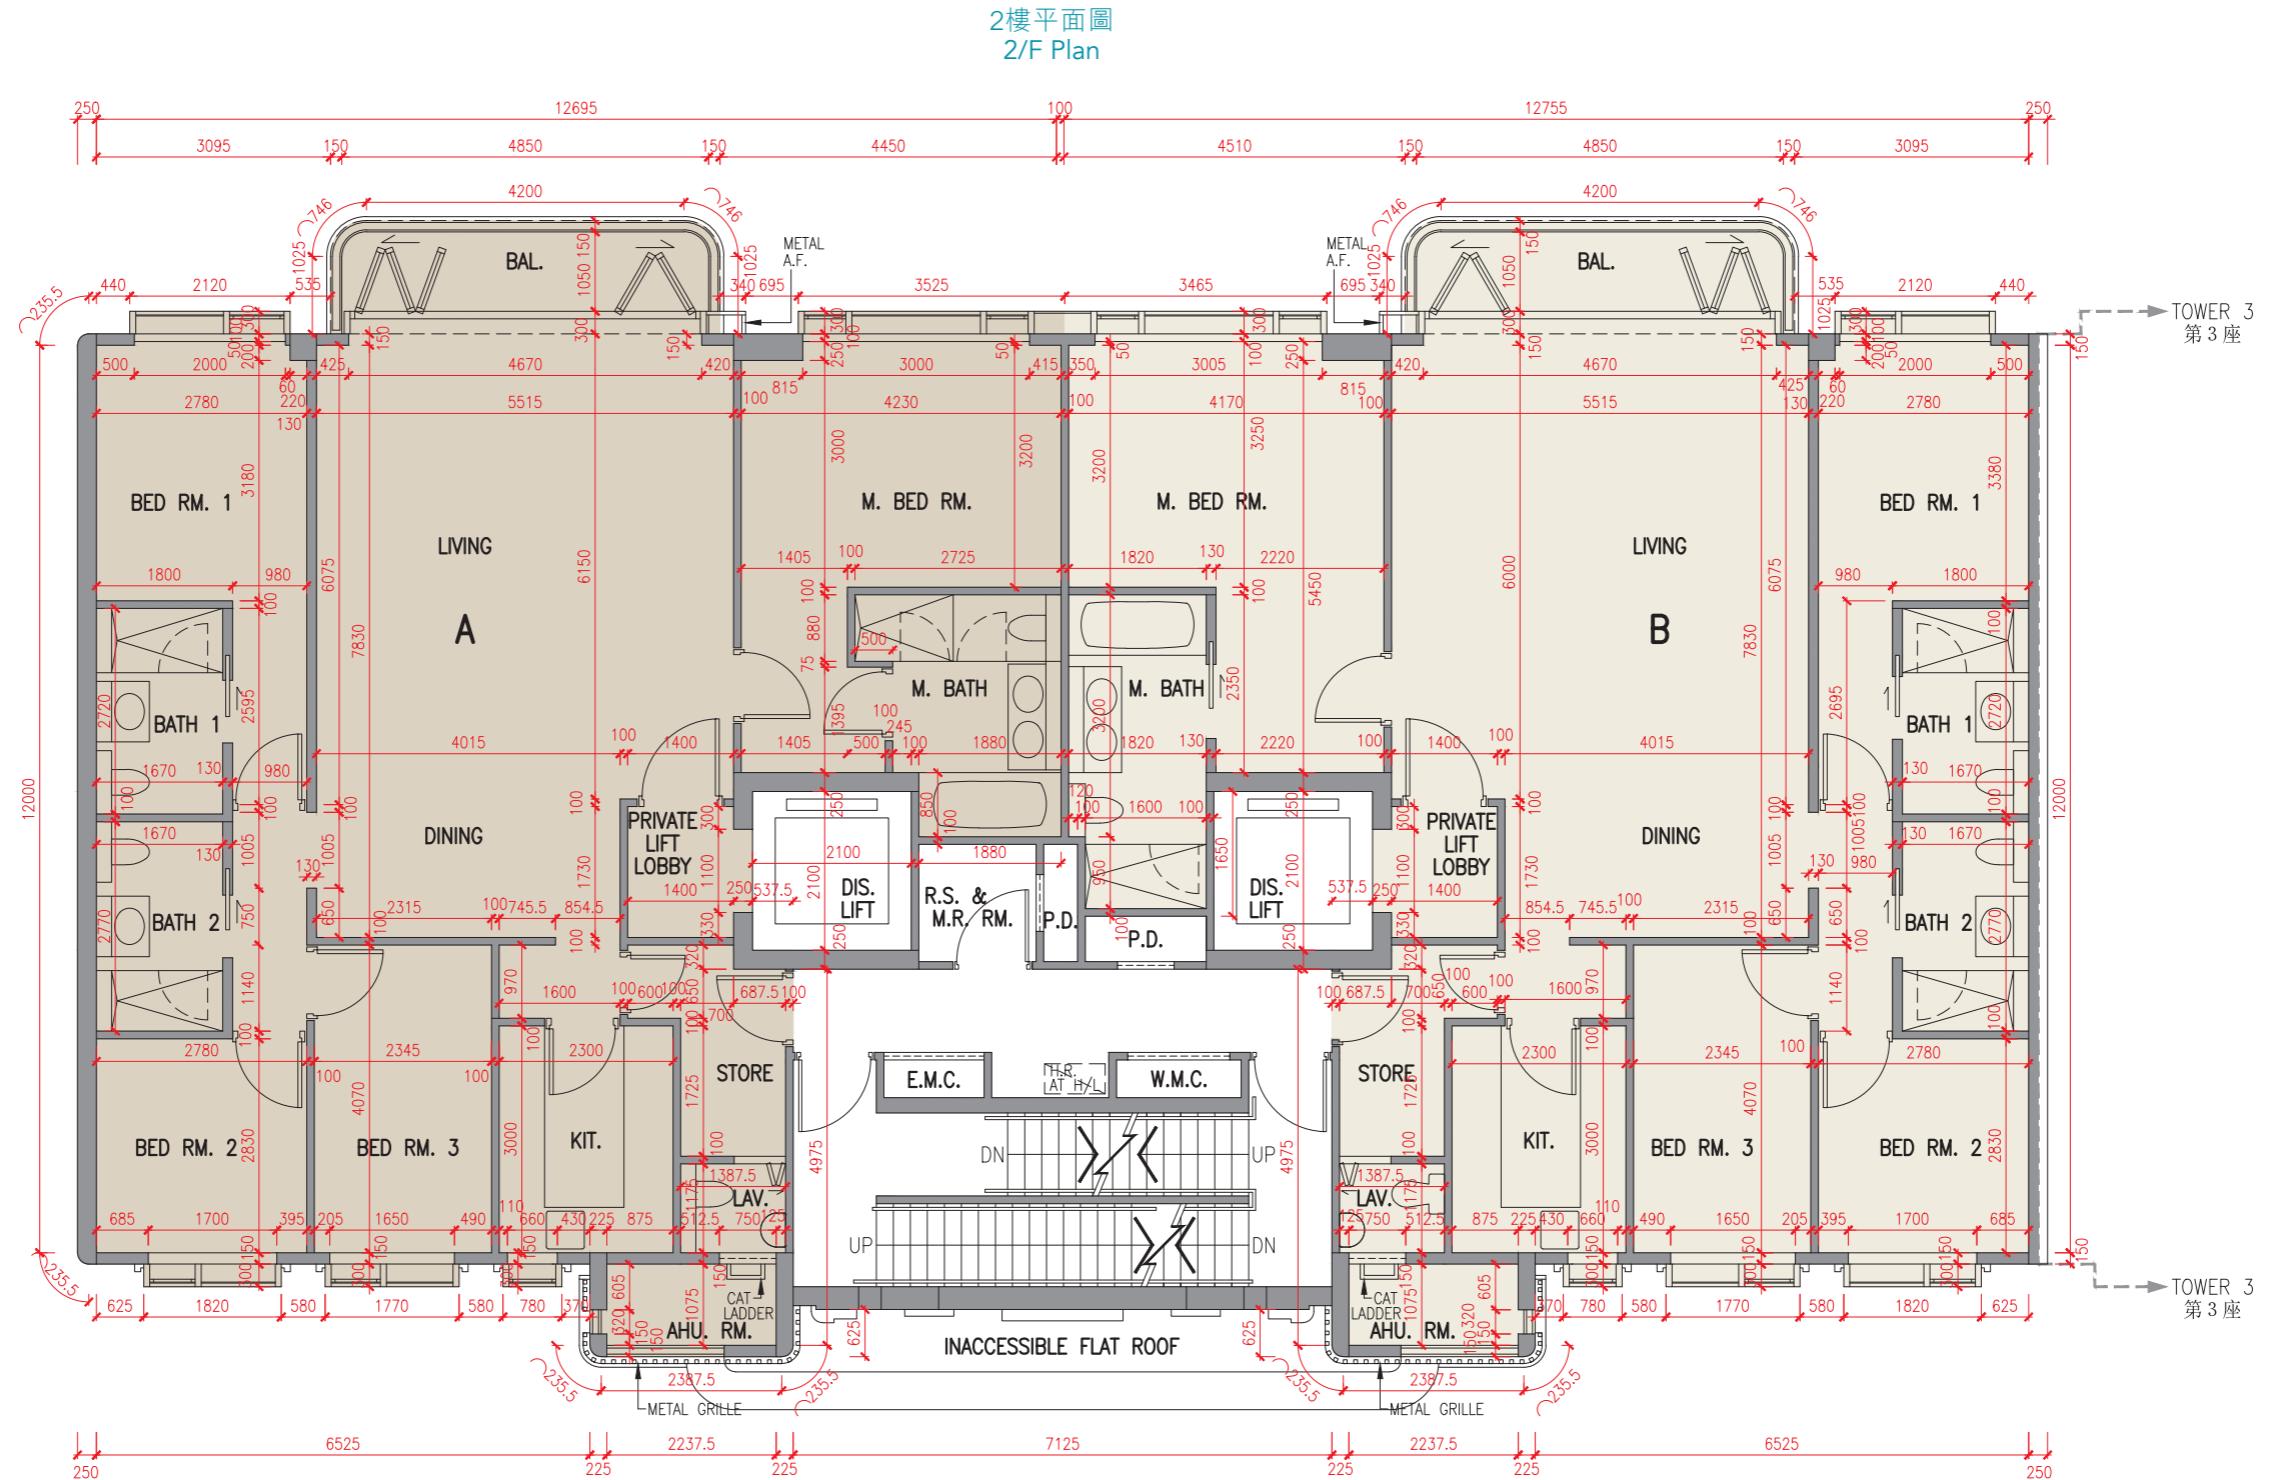
- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。
- 第5座地下及1樓A複式單位、B複式單位及C複式單位的空調機室外機安裝於此座天台上。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.
- The air-conditioning outdoor unit(s) for Duplex A, Duplex B and Duplex C on G/F and 1/F of Tower 5 is/are located on the roof of the Tower.

第5座 Tower 5

比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

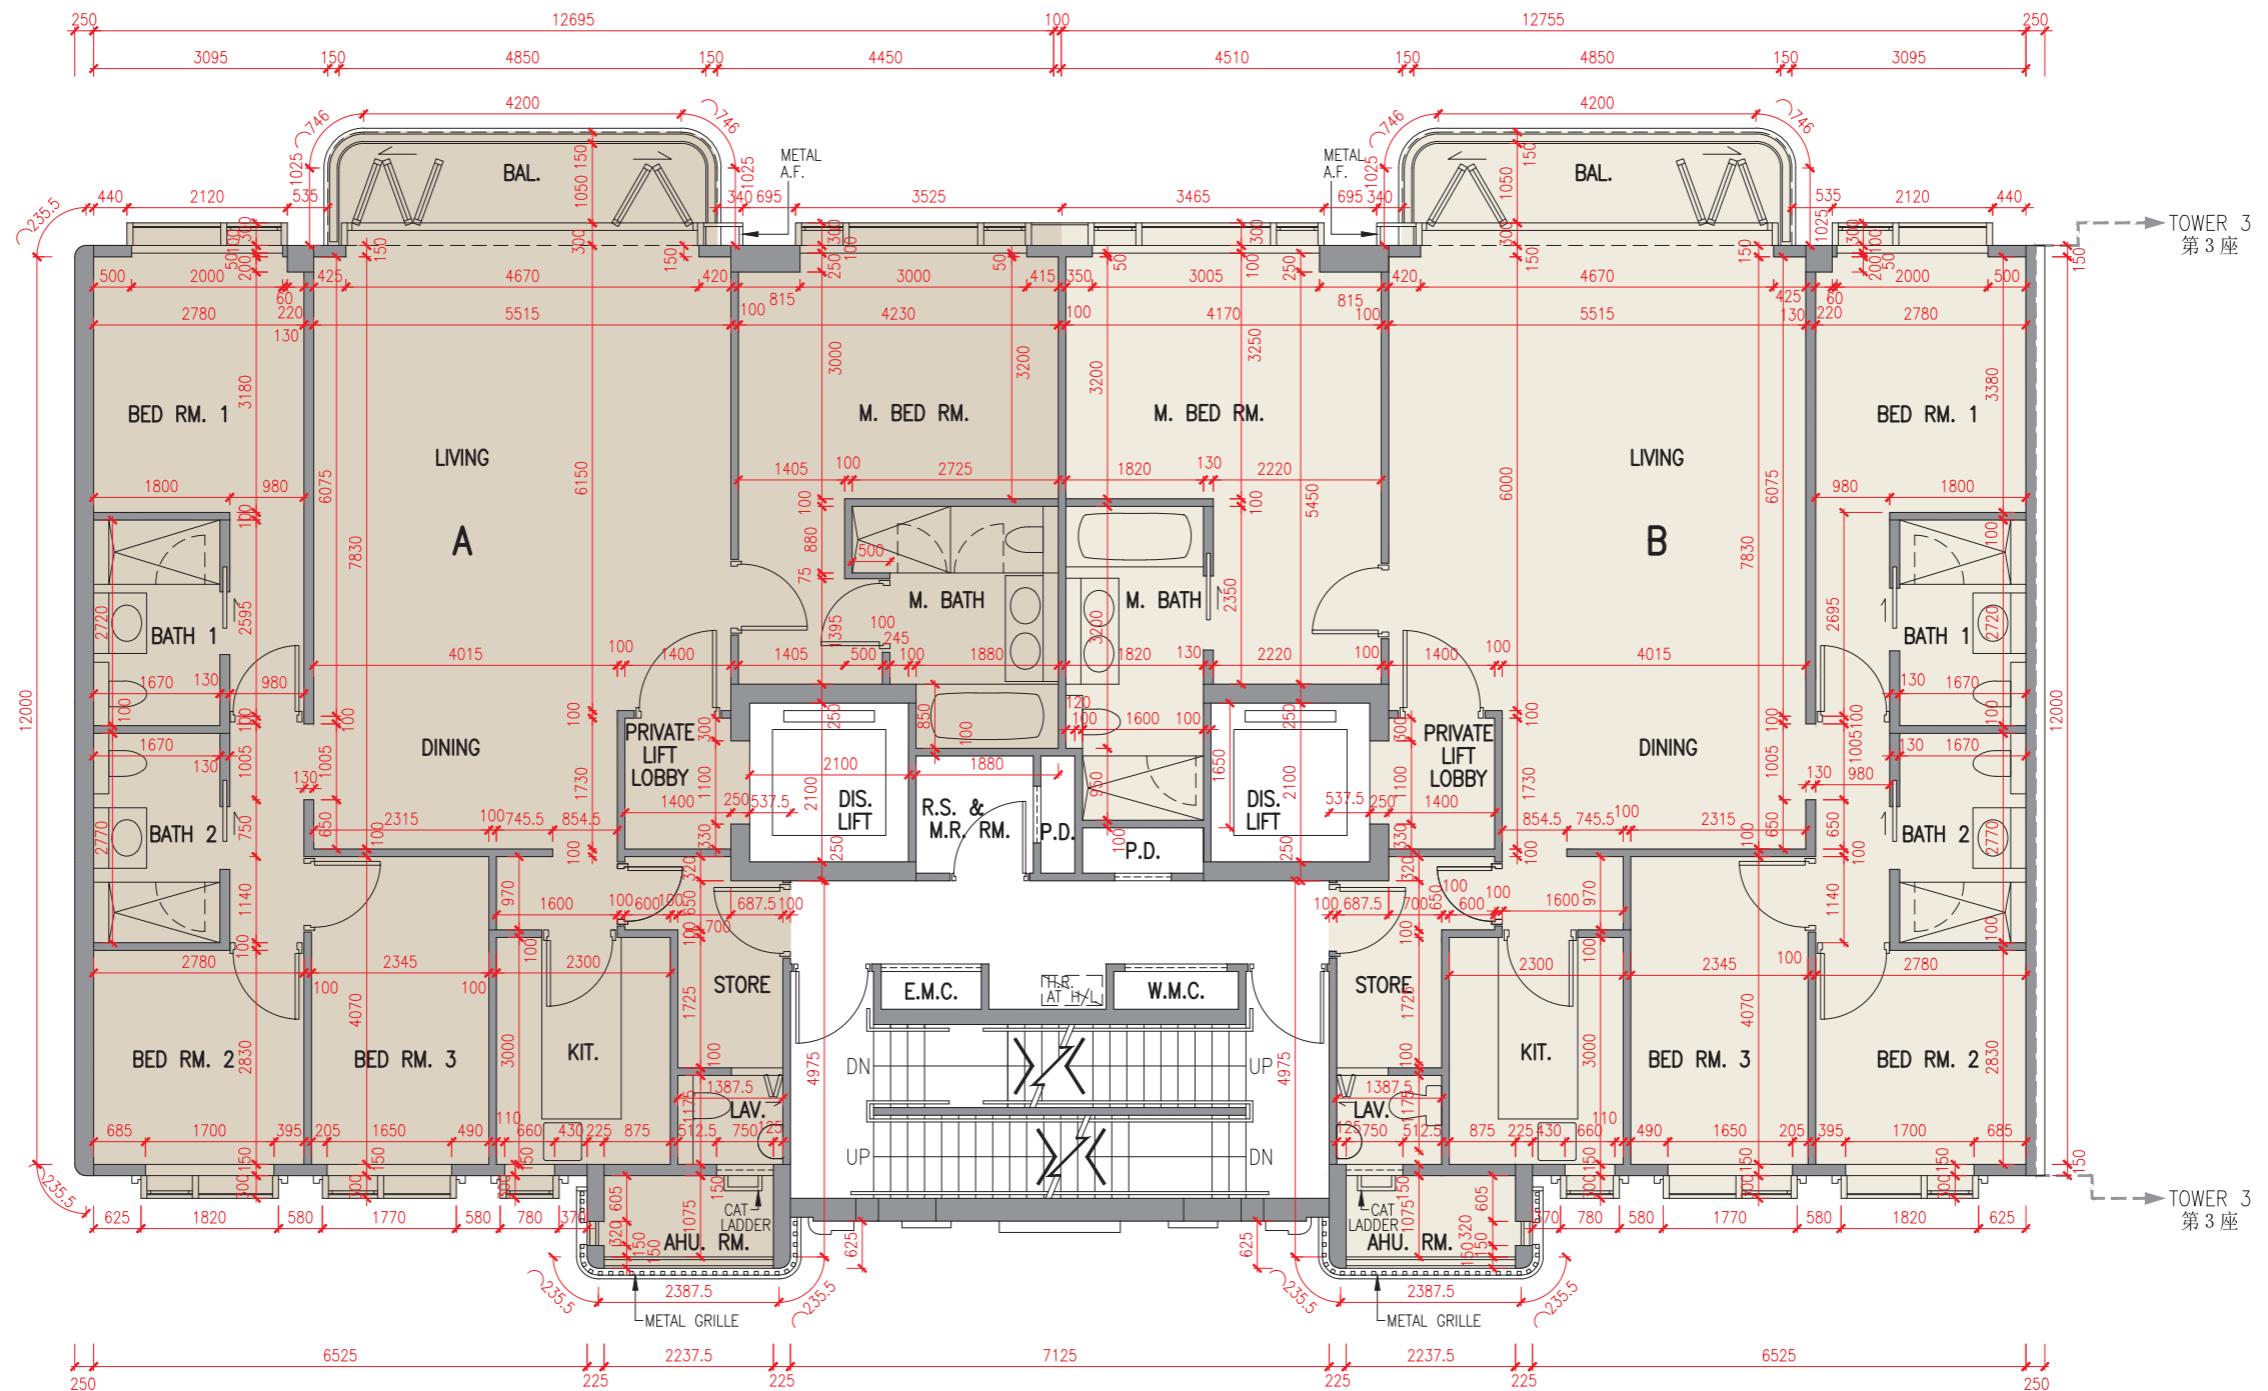
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A單位 Flat A	B單位 Flat B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第5座 Tower 5	2樓 2/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175, 200	150, 175, 200

第5座 Tower 5

3樓平面圖
3/F Plan比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

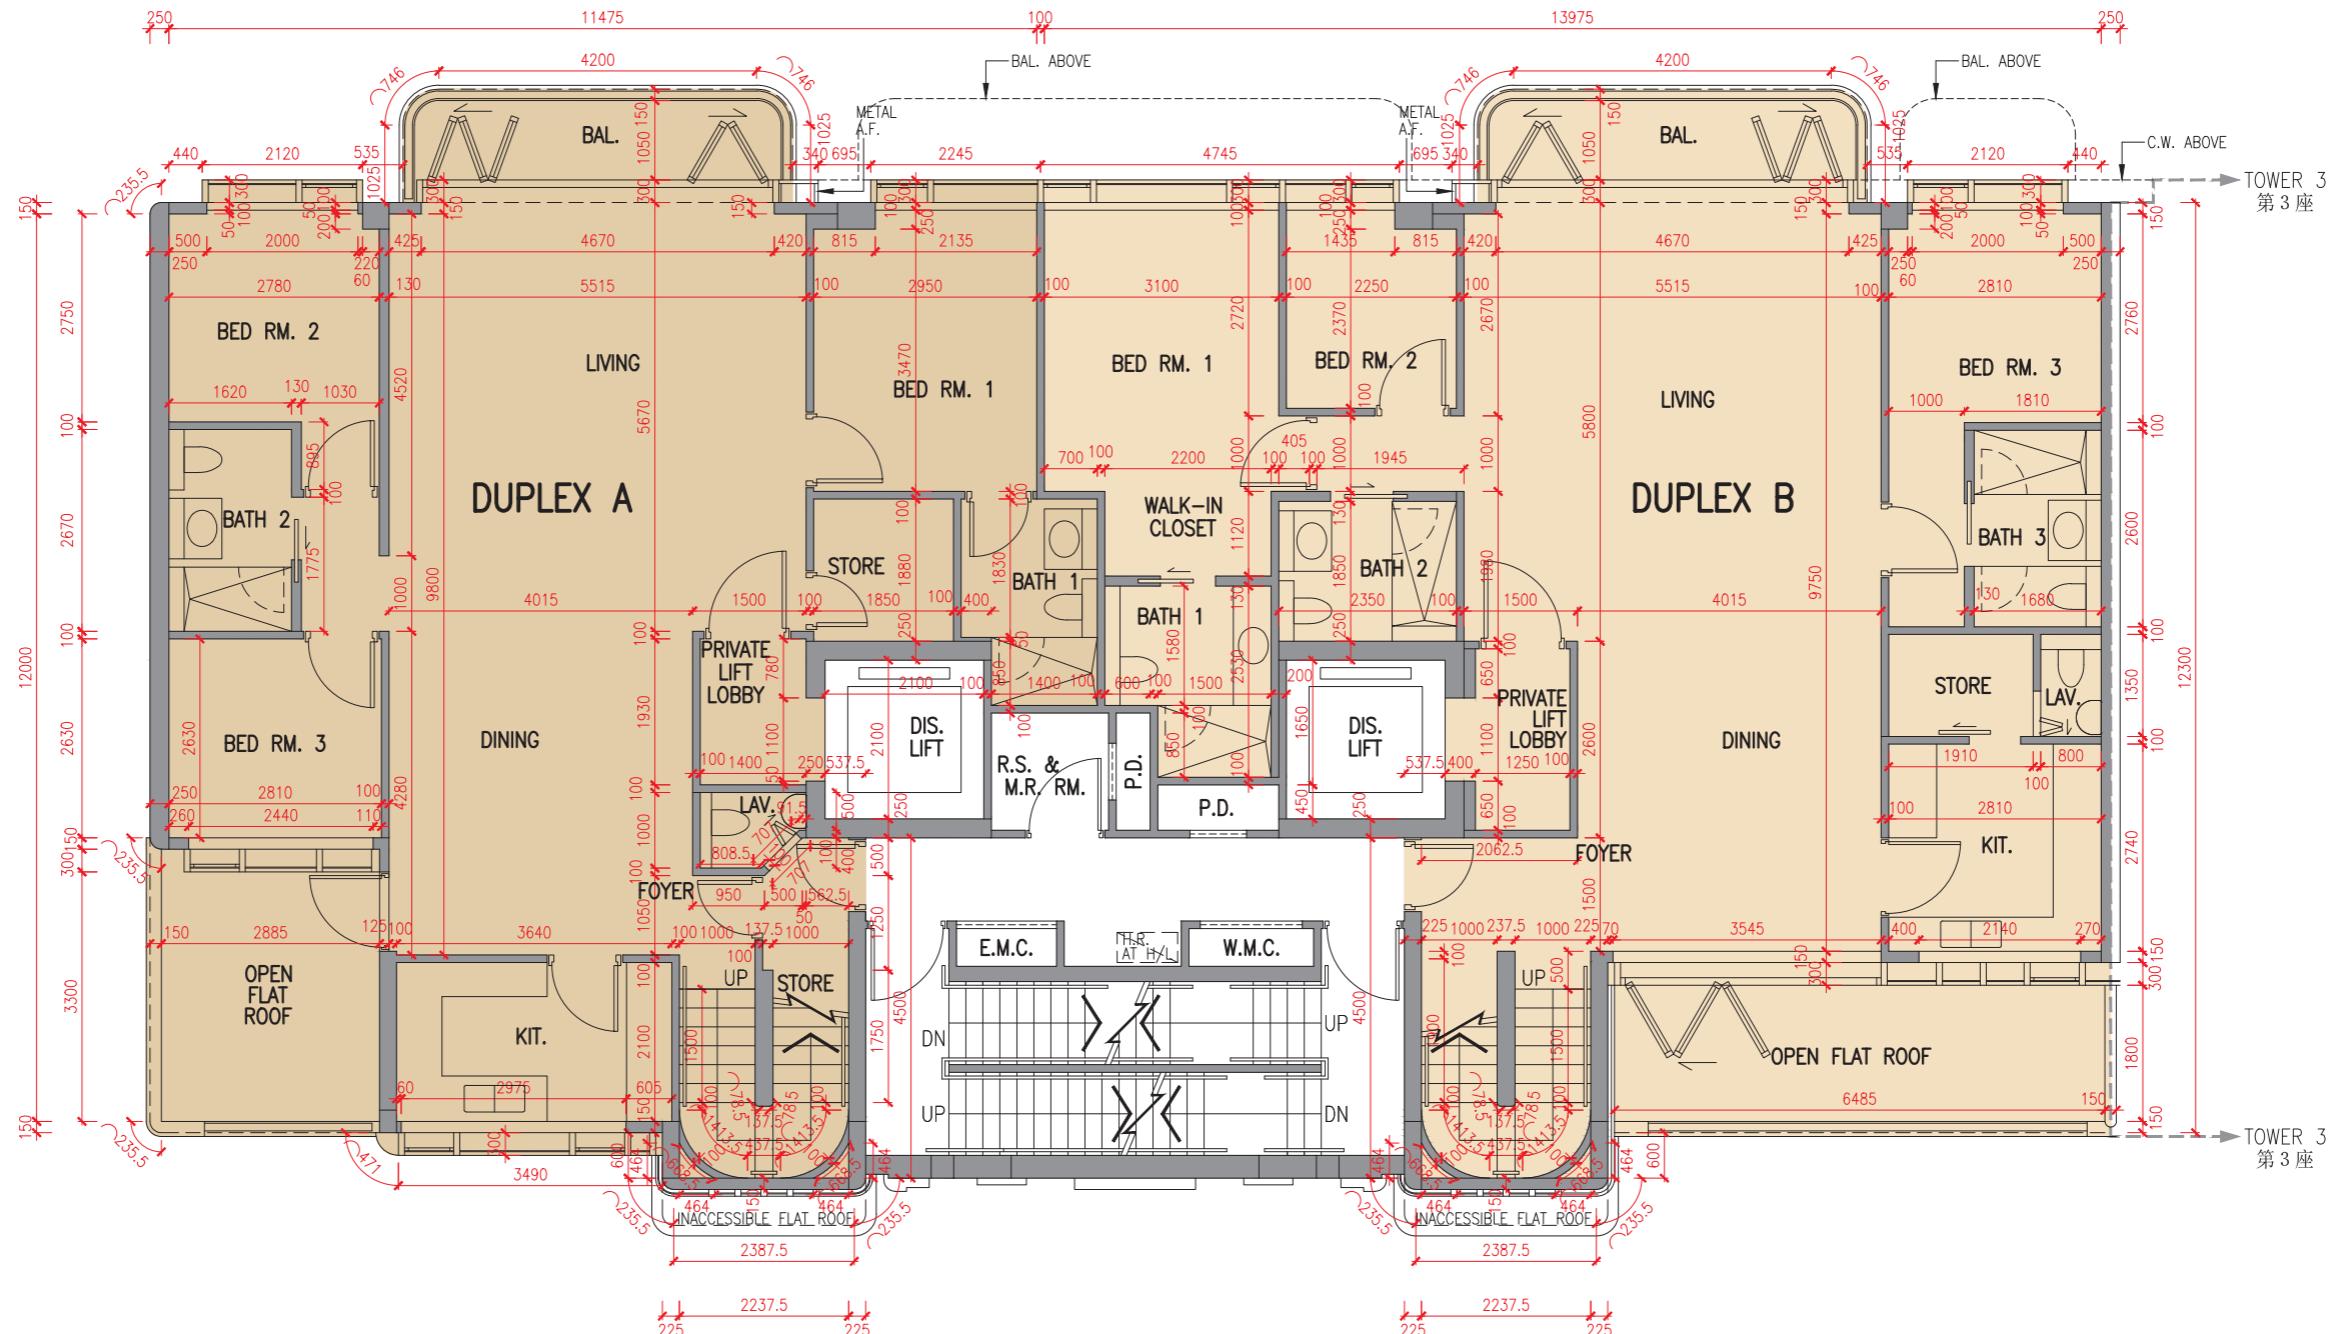
The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A單位 Flat A	B單位 Flat B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第5座 Tower 5	3樓 3/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175	150, 175

第5座 Tower 5

5樓平面圖
5/F Plan

N 比例 0米/M
Scale 5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

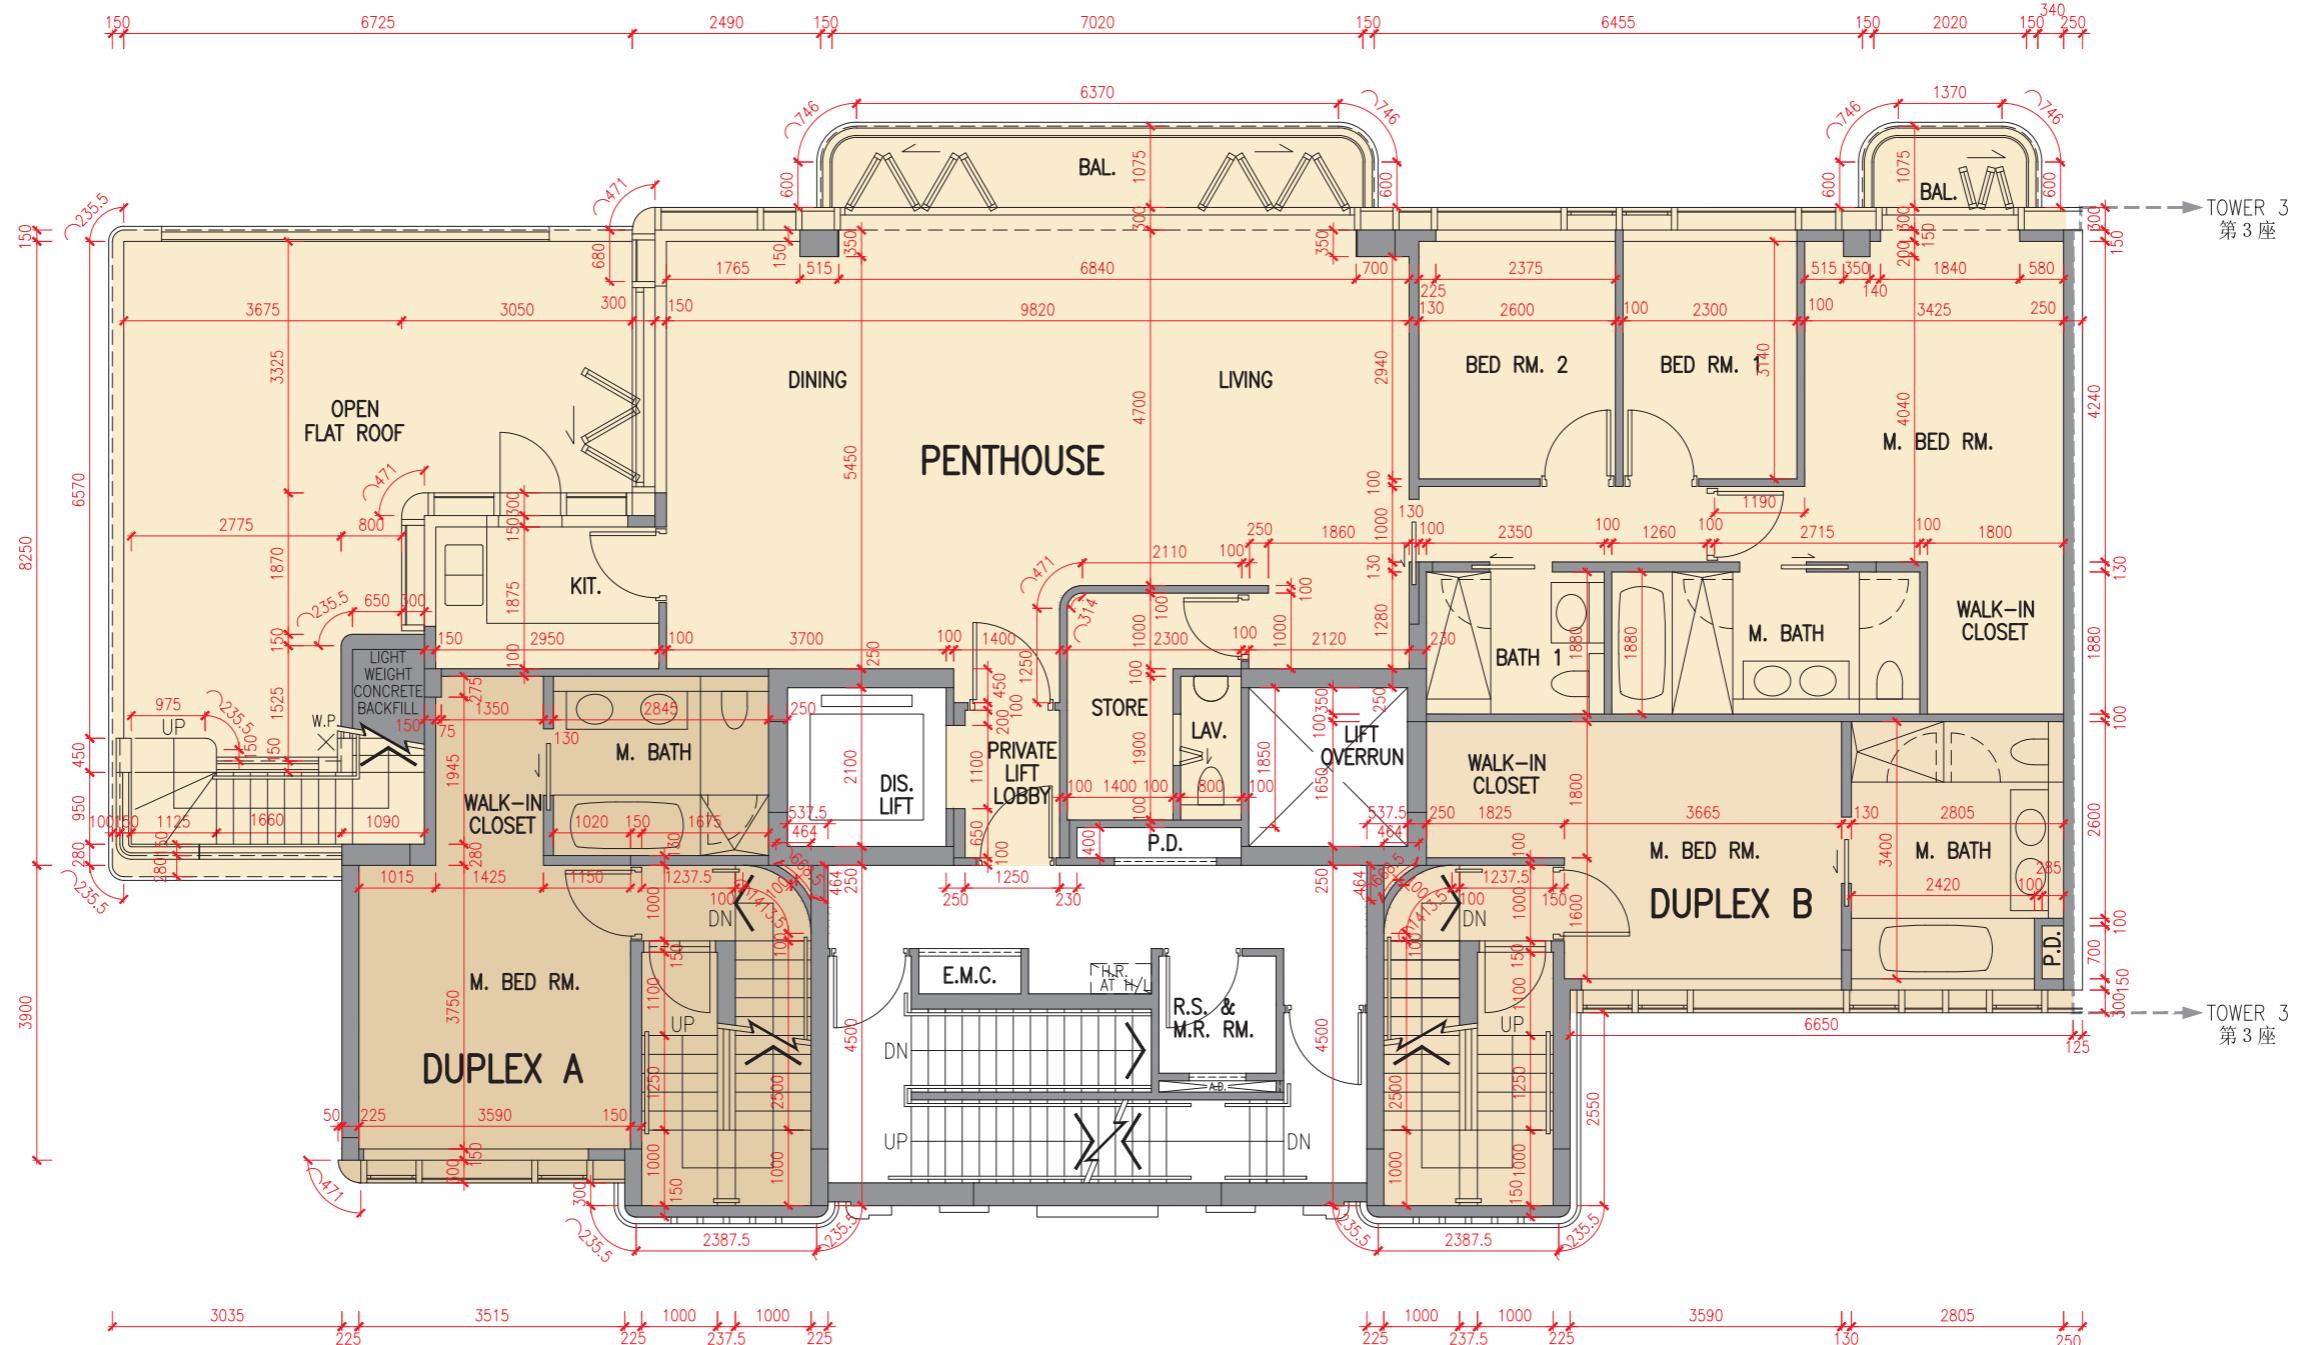
Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第5座 Tower 5	5樓 5/F		3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150, 175, 200	150, 175, 200

第5座 Tower 5

6樓平面
6/F Plan



比例 0米/M
Scale

5米/M

因住宅物業的較高樓層的結構牆的厚度遞減，較樓層的內部面積，一般比較低樓層的內部面積大。（不適用）

備註

- 備註

 - 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
 - 每個住宅物業的層與層之間的高度指該樓層之石屎地台面上一層石屎地台面之高度距離。
 - 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

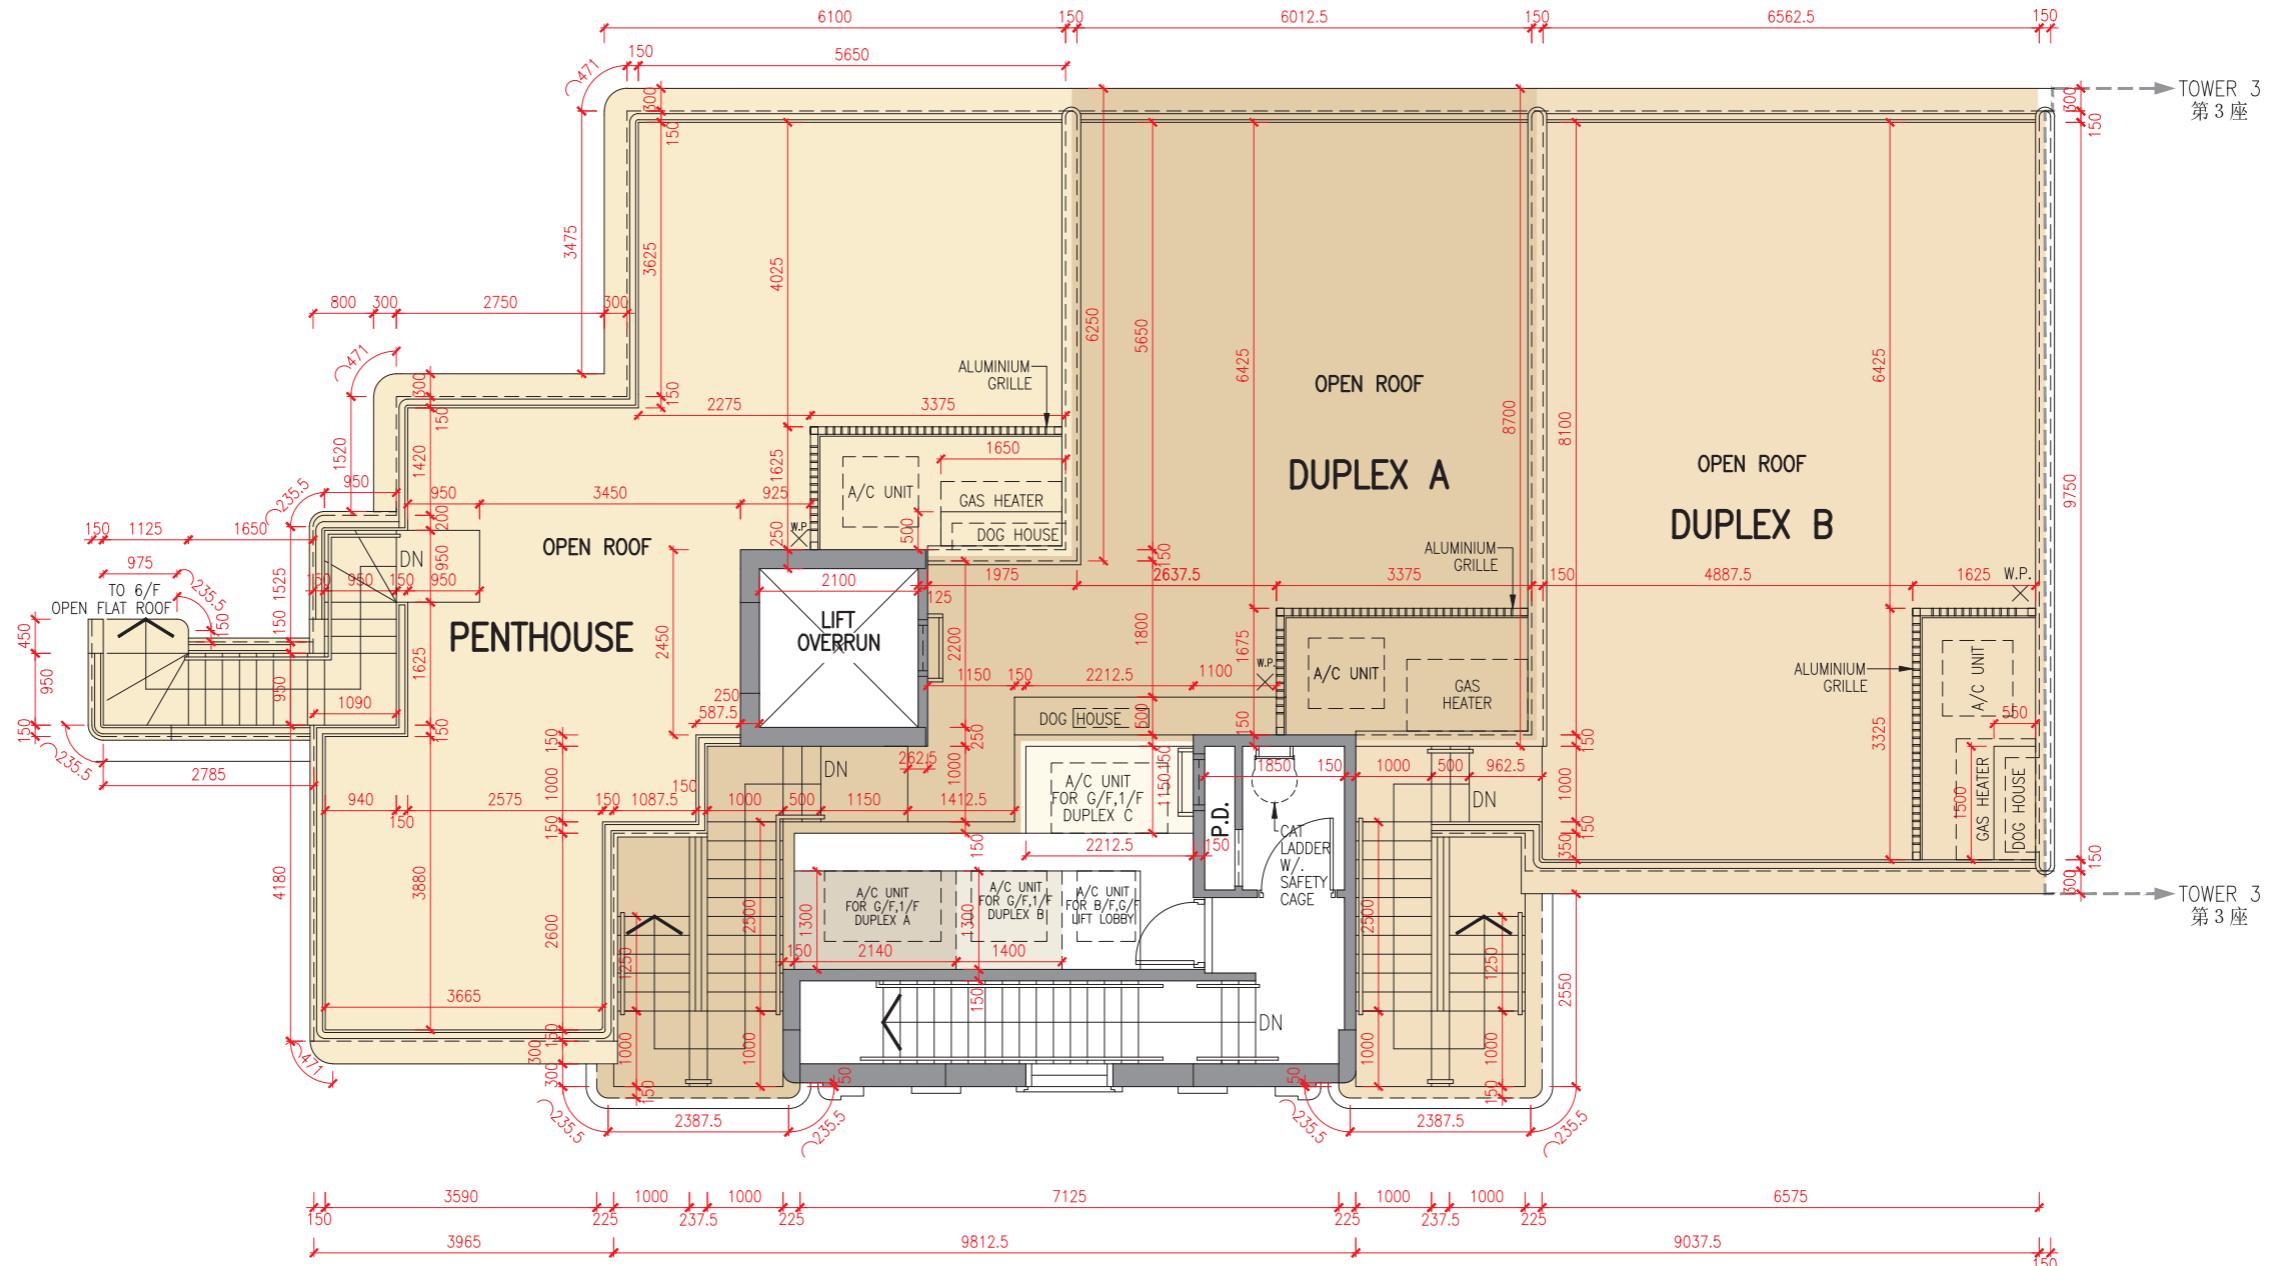
Notes

- Notes:

 1. The dimensions in the floor plans are all structural dimensions in millimetre.
 2. The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
 3. The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第5座 Tower 5	6樓 6/F		3200	3200	3200
樓板厚度 (毫米) Thickness of the floor slabs (mm)				150	150, 175	150, 175, 200,

第5座 Tower 5

天台平面圖
Roof Plan

比例 Scale 0米/M 5米/M
N

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。（不適用）

備註：

- 樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
- 每個住宅物業的層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離。
- 每個住宅物業的樓板的厚度不包括灰泥。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Not applicable)

Notes:

- The dimensions in the floor plans are all structural dimensions in millimetre.
- The floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor of each residential property.
- The thickness of the floor slabs excludes plaster of each residential property.

	座 Tower	樓層 Floor	單位 Unit	A複式單位 Duplex A	B複式單位 Duplex B	頂層單位 Penthouse
層與層之間的高度 (毫米) Floor-to-floor height (mm)	第5座 Tower 5	天台 Roof				不適用 N/A
樓板厚度 (毫米) Thickness of the floor slabs (mm)						