


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

2/F
2樓

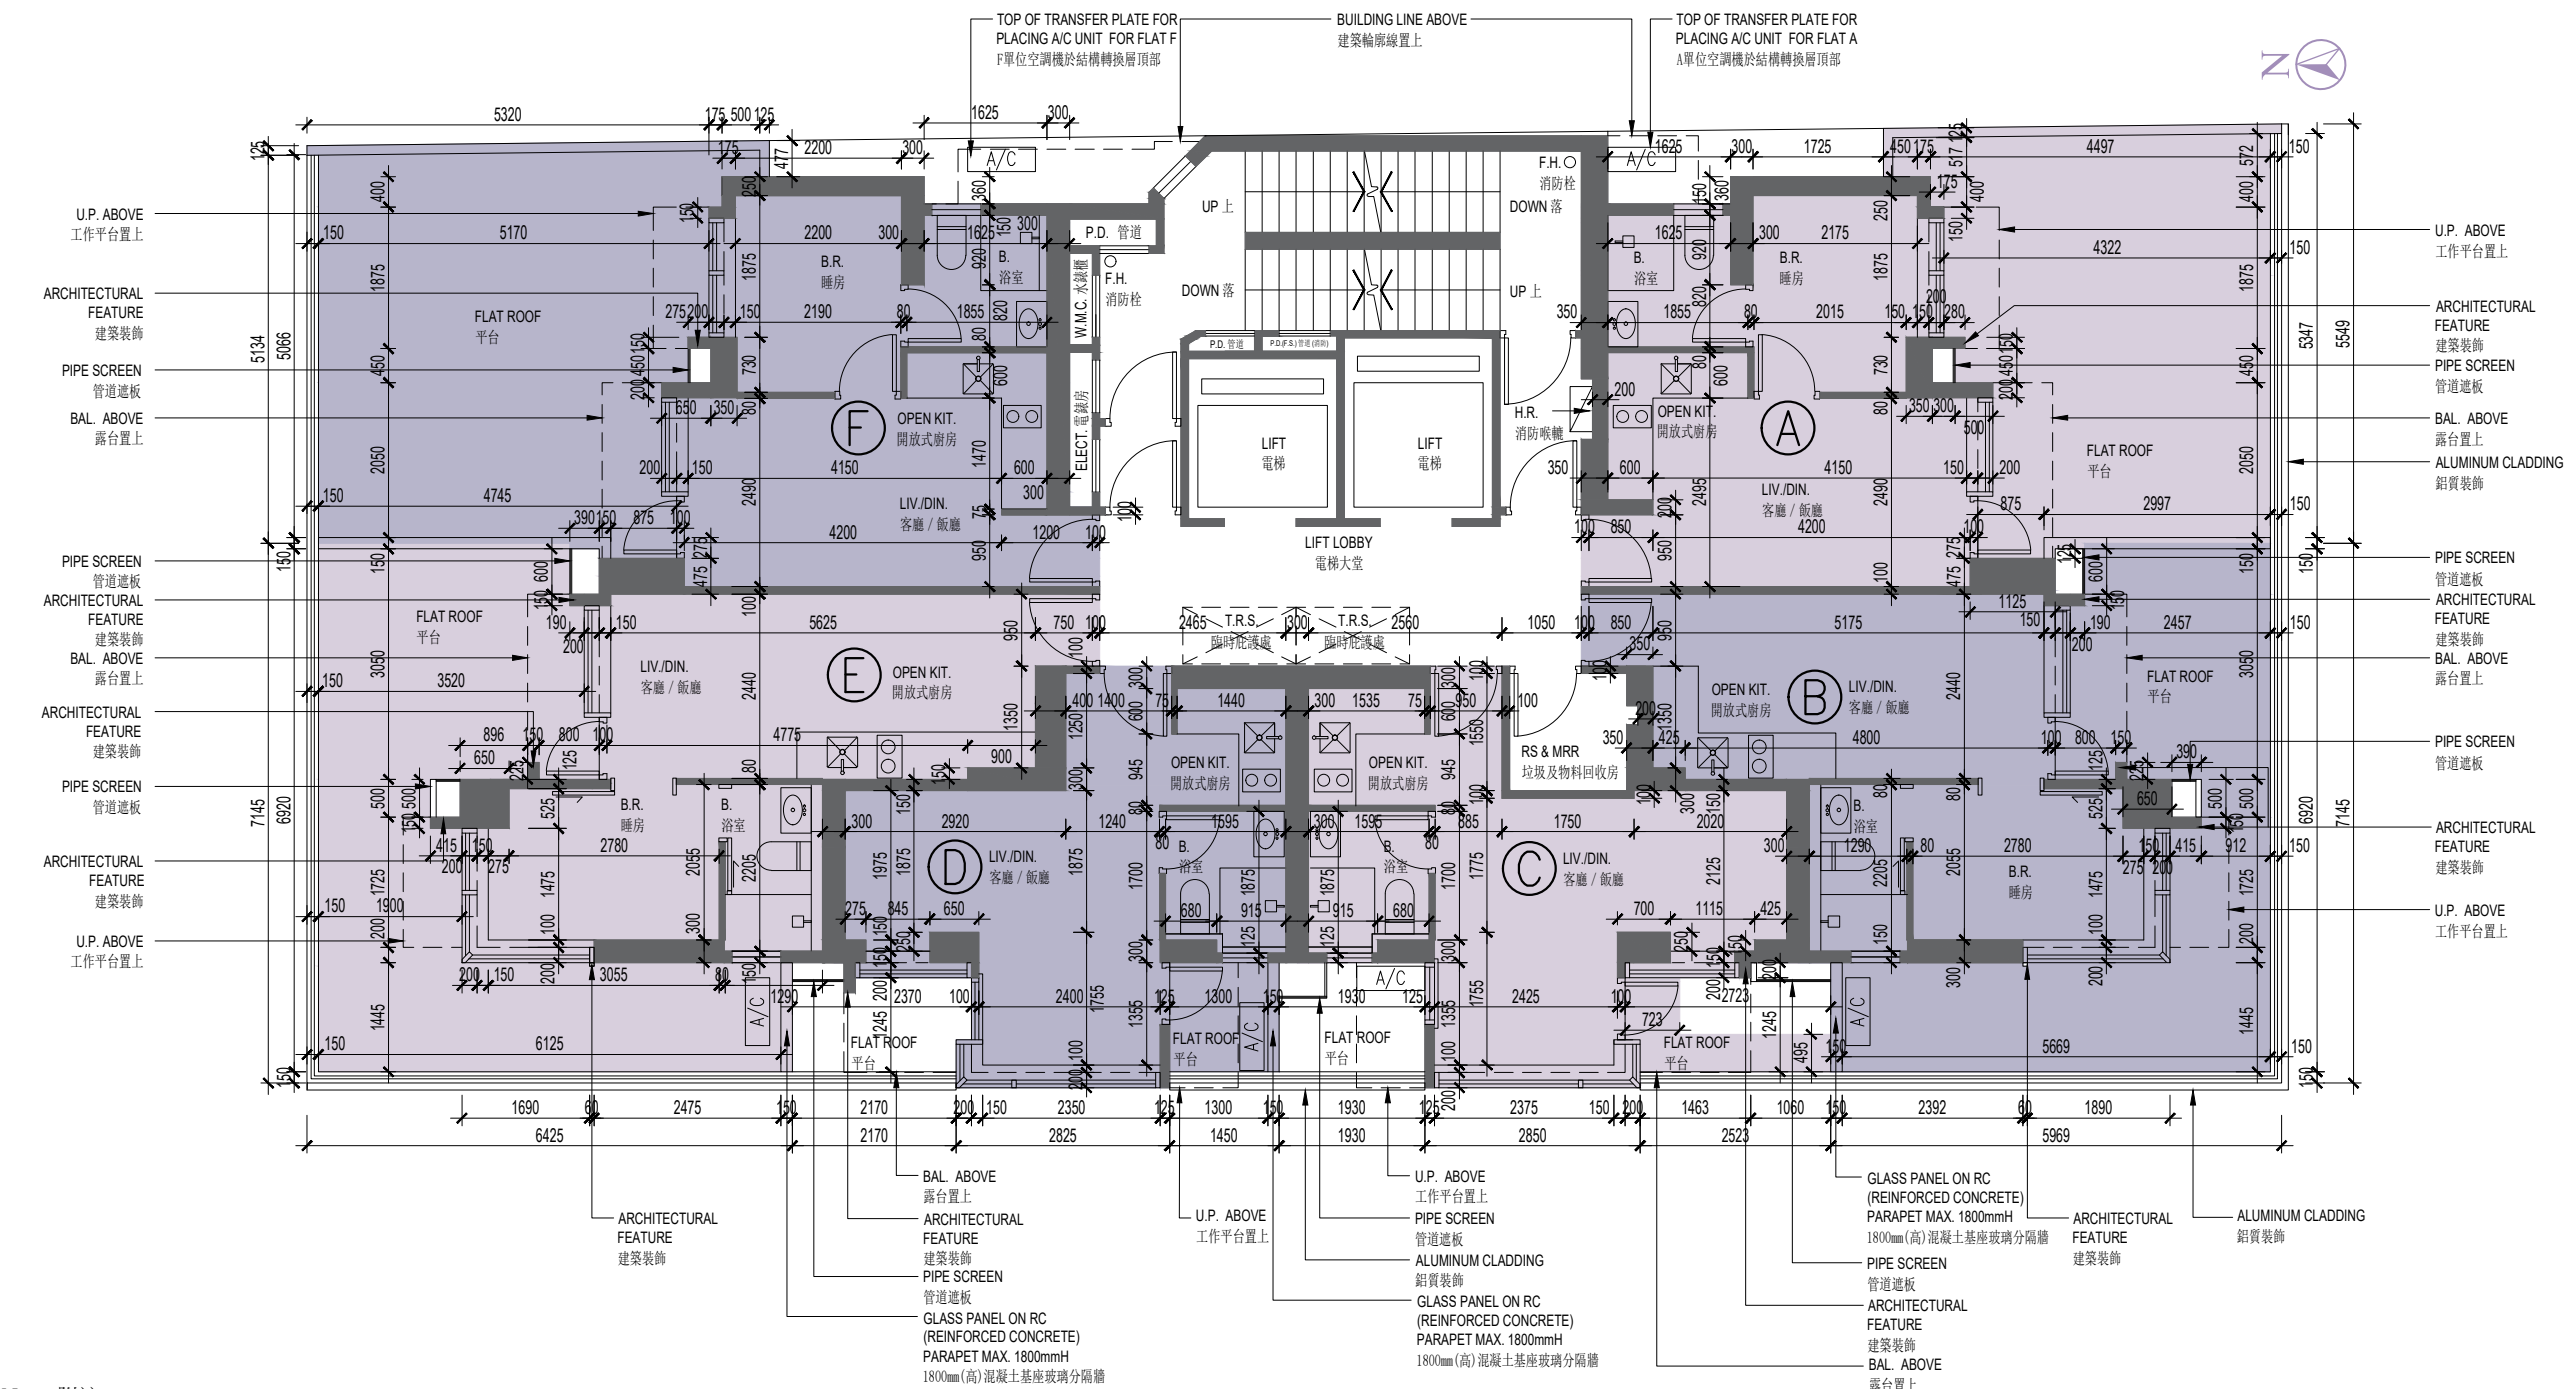

Scale 比例
Metre 米 0 5

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

The thickness of the floor slabs (excluding plaster) and floor-to-floor height of each residential property of the Development as provided in the approved building plans are:
按發展項目經批准的建築圖則所規定，發展項目每個住宅物業的樓板 (不包括灰泥) 的厚度及層與層之間的高度為：

Floor 樓層	Flat 單位	Thickness of the Floor Slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	Floor-to-Floor Height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)
2/F 2樓	A	150, 200	3150, 3350, 3600
	B	150, 300	3000, 3150, 3350, 3600
	C	150	3150, 3350, 3600
	D	150	3150, 3350, 3600
	E	150, 300	3000, 3150, 3350, 3600
	F	150, 200	3150, 3350, 3600


The internal areas of the residential properties on the upper floors will be generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Note 附註：
Floor-to-floor height is inclusive of thickness of mass concrete fill on sunken slab.
層與層之間的高度包括跌級樓板上的無鋼筋混凝土填充層之厚度。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

3/F & 5/F - 11/F
3樓及5樓至11樓

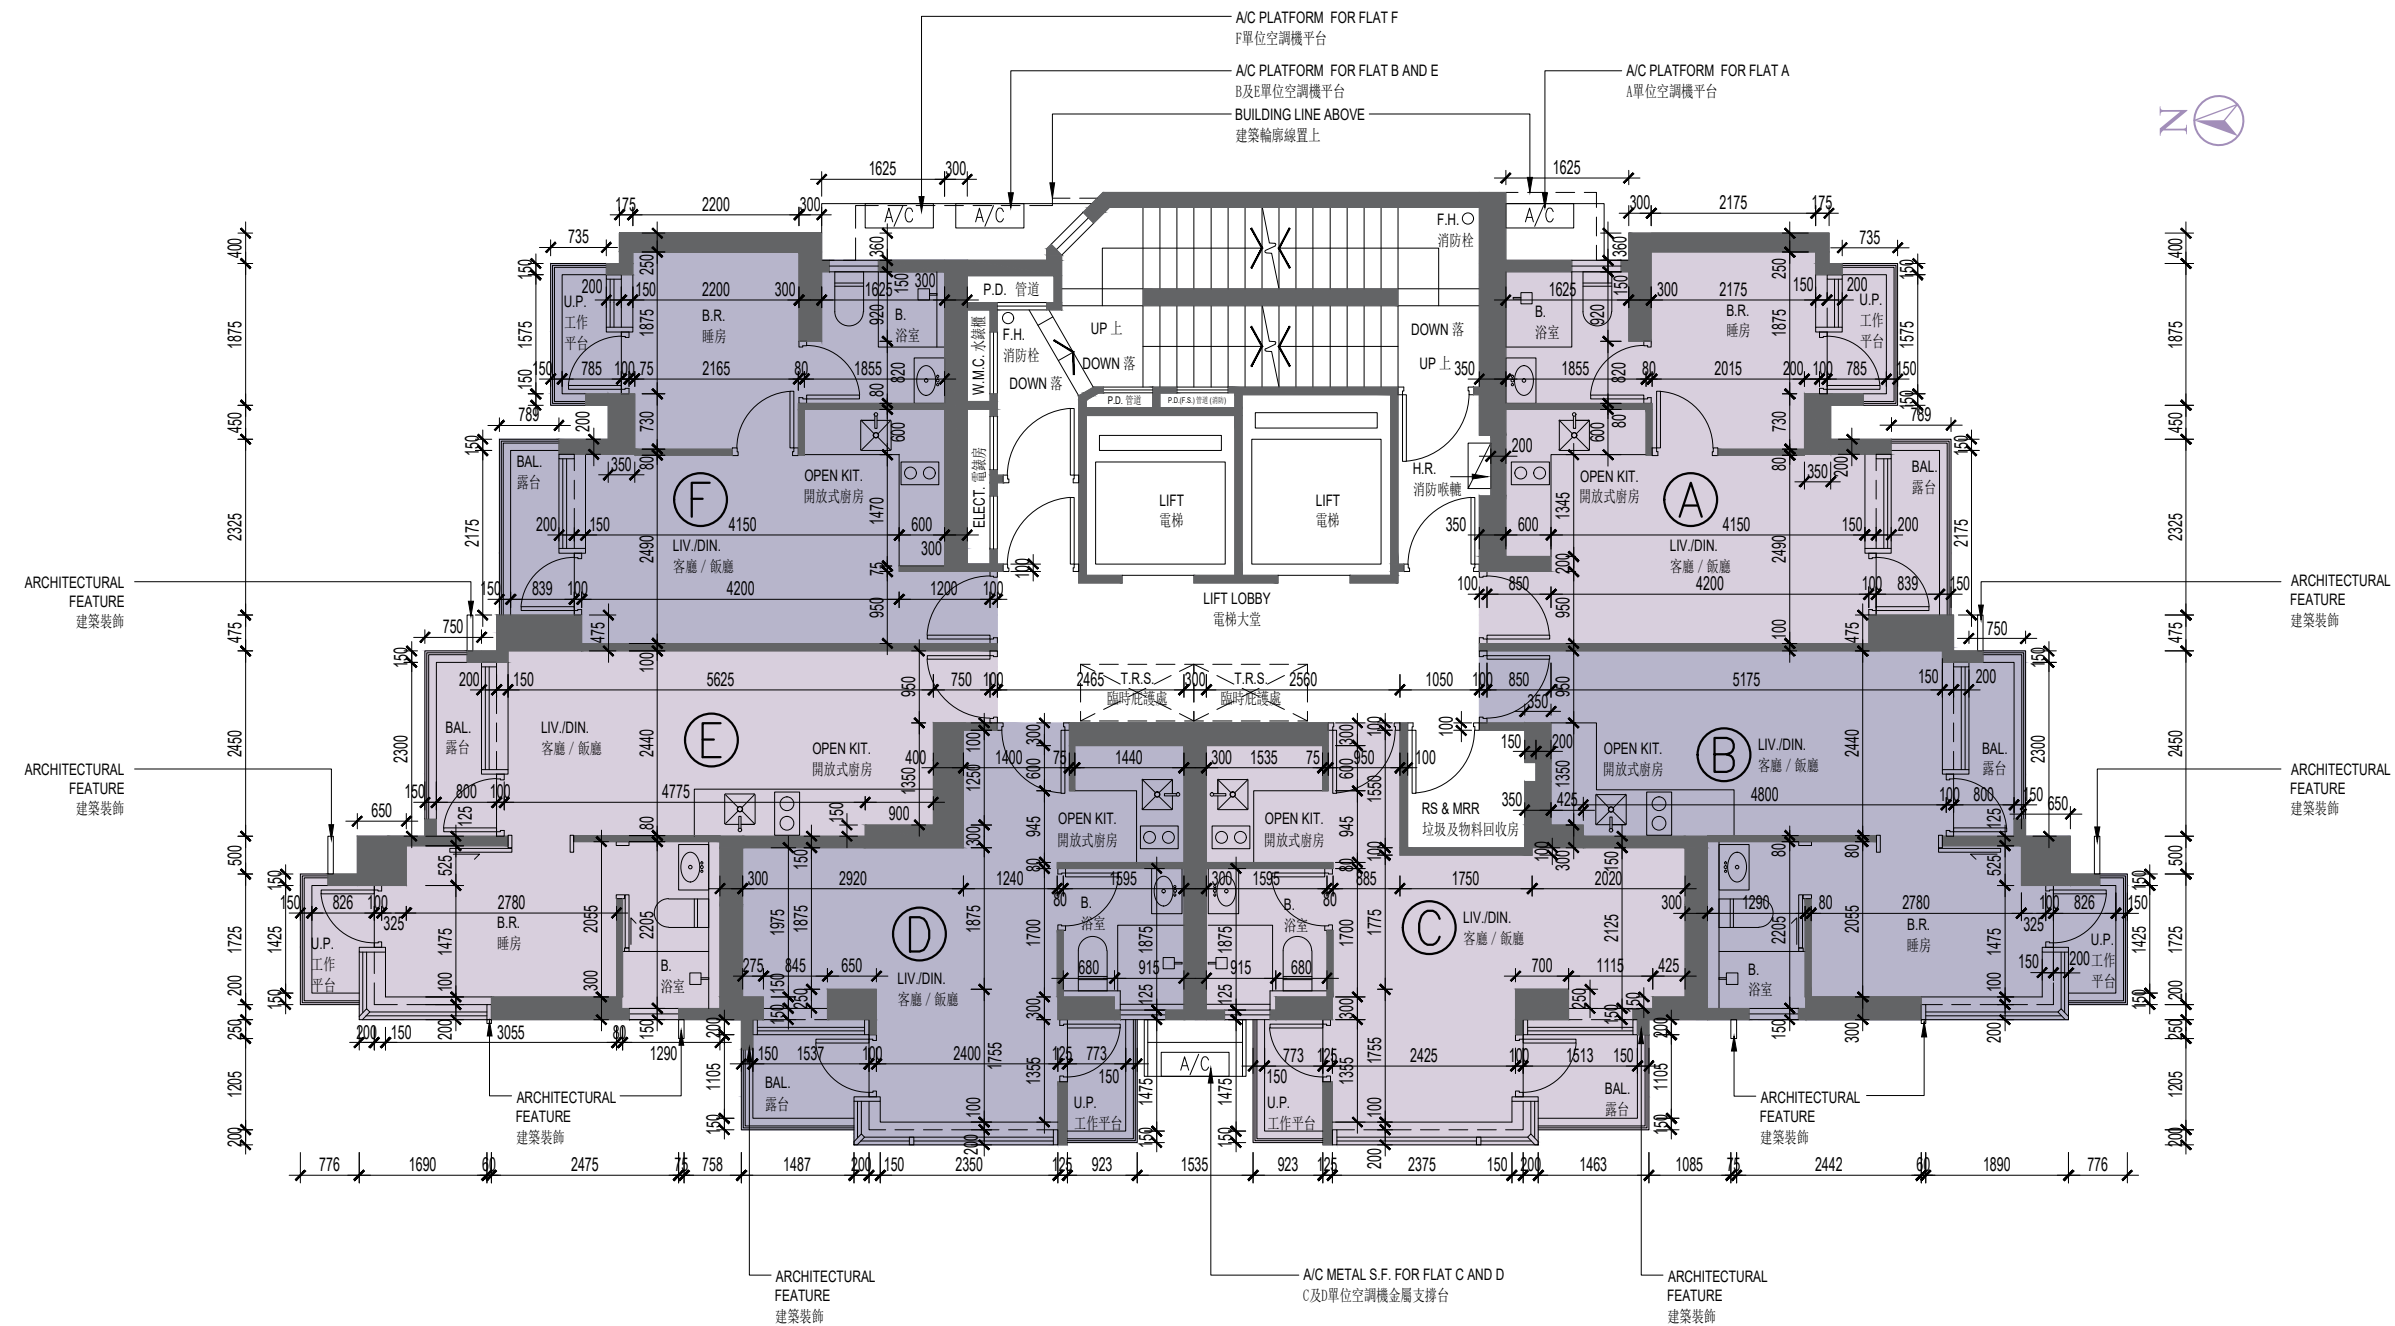

Notes 附註:

1. The dimensions of floor plans are all structural dimensions in millimetre.
樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. Please refer to page 36 of this sales brochure for notes and legend of terms and abbreviations shown on this floor plan.
請參閱本售樓說明書第36頁關於本平面圖上顯示的名詞及簡寫之附註及圖例。
3. 4/F, 14/F and 24/F are omitted. 22/F is refuge floor.
不設4樓、14樓及24樓。22樓為底護層。

Metre 米 Scale 比例
0 5

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

The thickness of the floor slabs (excluding plaster) and floor-to-floor height of each residential property of the Development as provided in the approved building plans are:
按發展項目經批准的建築圖則所規定，發展項目每個住宅物業的樓板 (不包括灰泥) 的厚度及層與層之間的高度為：

Floor 樓層	Flat 單位	Thickness of the Floor Slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	Floor-to-Floor Height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)
3/F & 5/F - 11/F 3樓及5樓至11樓	A	150, 200	3150
	B	150, 300	3150
	C	150	3150
	D	150	3150
	E	150, 300	3150
	F	150, 200	3150


The internal areas of the residential properties on the upper floors will be generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Note 附註：
Floor-to-floor height is inclusive of thickness of mass concrete fill on sunken slab.
層與層之間的高度包括跌級樓板上的無鋼筋混凝土填充層之厚度。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

12/F - 13/F & 15/F - 21/F
12樓至13樓及15樓至21樓

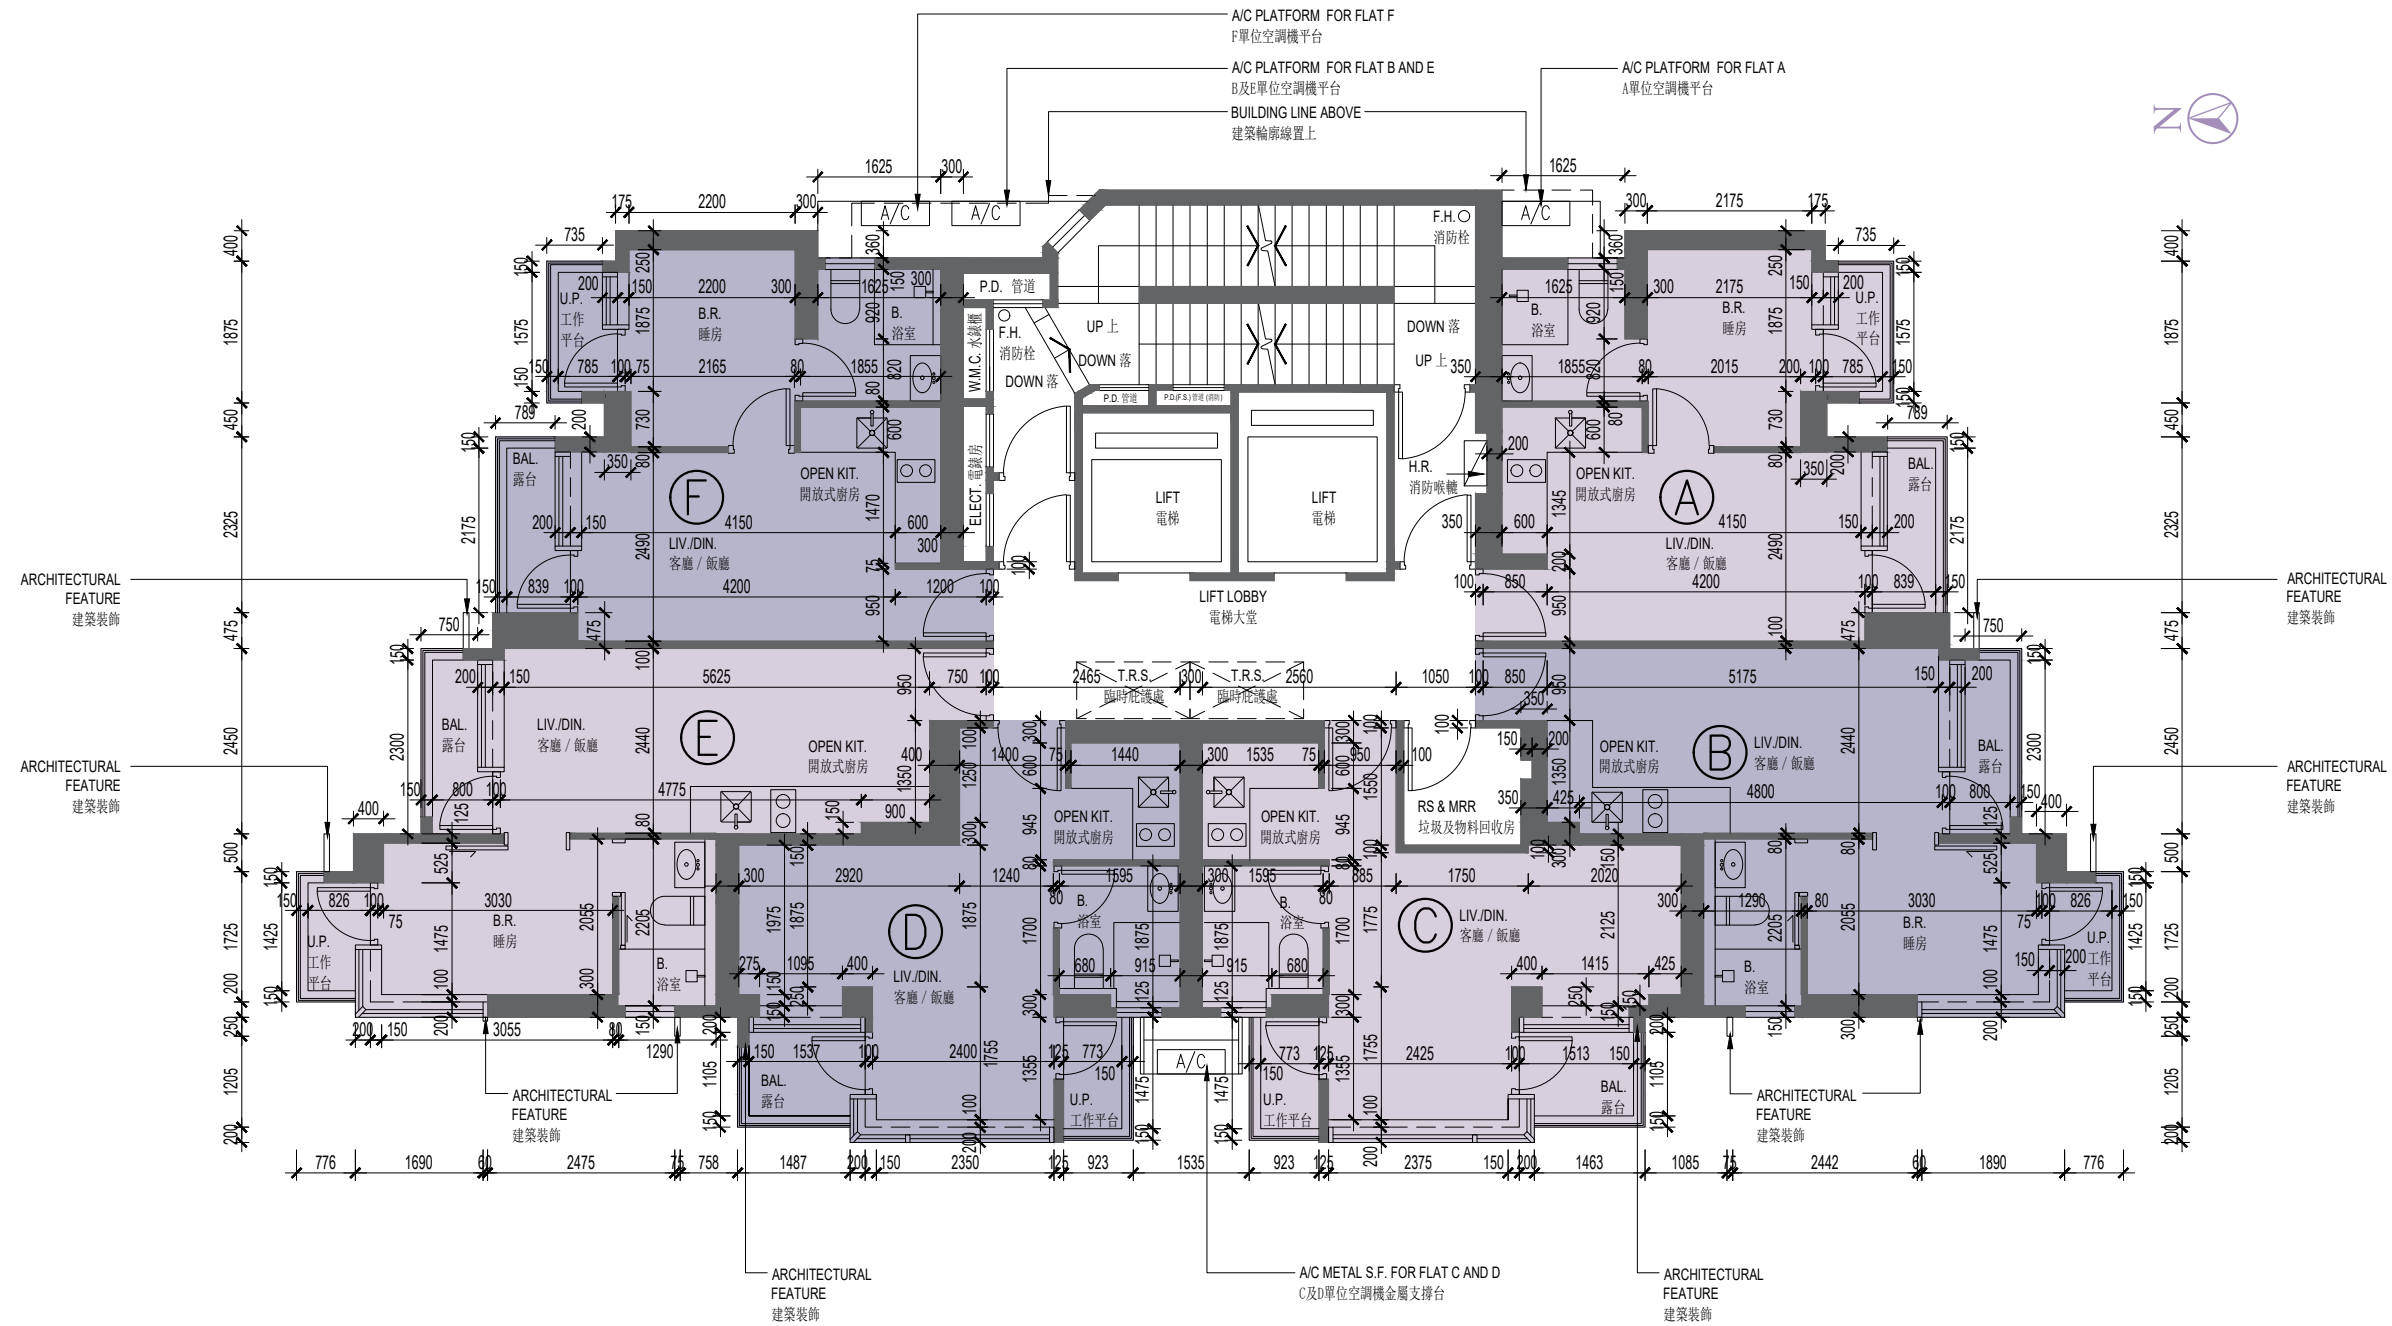

Notes 附註:

1. The dimensions of floor plans are all structural dimensions in millimetre.
樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. Please refer to page 36 of this sales brochure for notes and legend of terms and abbreviations shown on this floor plan.
請參閱本售樓說明書第36頁關於本平面圖上顯示的名詞及簡寫之附註及圖例。
3. 4/F, 14/F and 24/F are omitted. 22/F is refuge floor.
不設4樓、14樓及24樓。22樓為庇護層。

Metre 米 Scale 比例
0 5

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

The thickness of the floor slabs (excluding plaster) and floor-to-floor height of each residential property of the Development as provided in the approved building plans are:
按發展項目經批准的建築圖則所規定，發展項目每個住宅物業的樓板 (不包括灰泥) 的厚度及層與層之間的高度為：

Floor 樓層	Flat 單位	Thickness of the Floor Slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	Floor-to-Floor Height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)
12/F - 13/F & 15/F - 20/F 12樓至13樓及 15樓至20樓	A	150, 200	3150
	B	150, 300	3150
	C	150	3150
	D	150	3150
	E	150, 300	3150
	F	150, 200	3150
21/F 21樓	A	150	3500, 3750, 3800, 4050
	B	150, 300	3500, 3550, 3650, 3800
	C	150	3500, 3550, 3800
	D	150	3500, 3550, 3800
	E	150, 300	3500, 3550, 3650, 3800
	F	150	3500, 3750, 3800, 4050


The internal areas of the residential properties on the upper floors will be generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Note 附註：
Floor-to-floor height is inclusive of thickness of mass concrete fill on sunken slab.
層與層之間的高度包括跌級樓板上的無鋼筋混凝土填充層之厚度。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

23/F & 25/F - 28/F
23樓及25樓至28樓

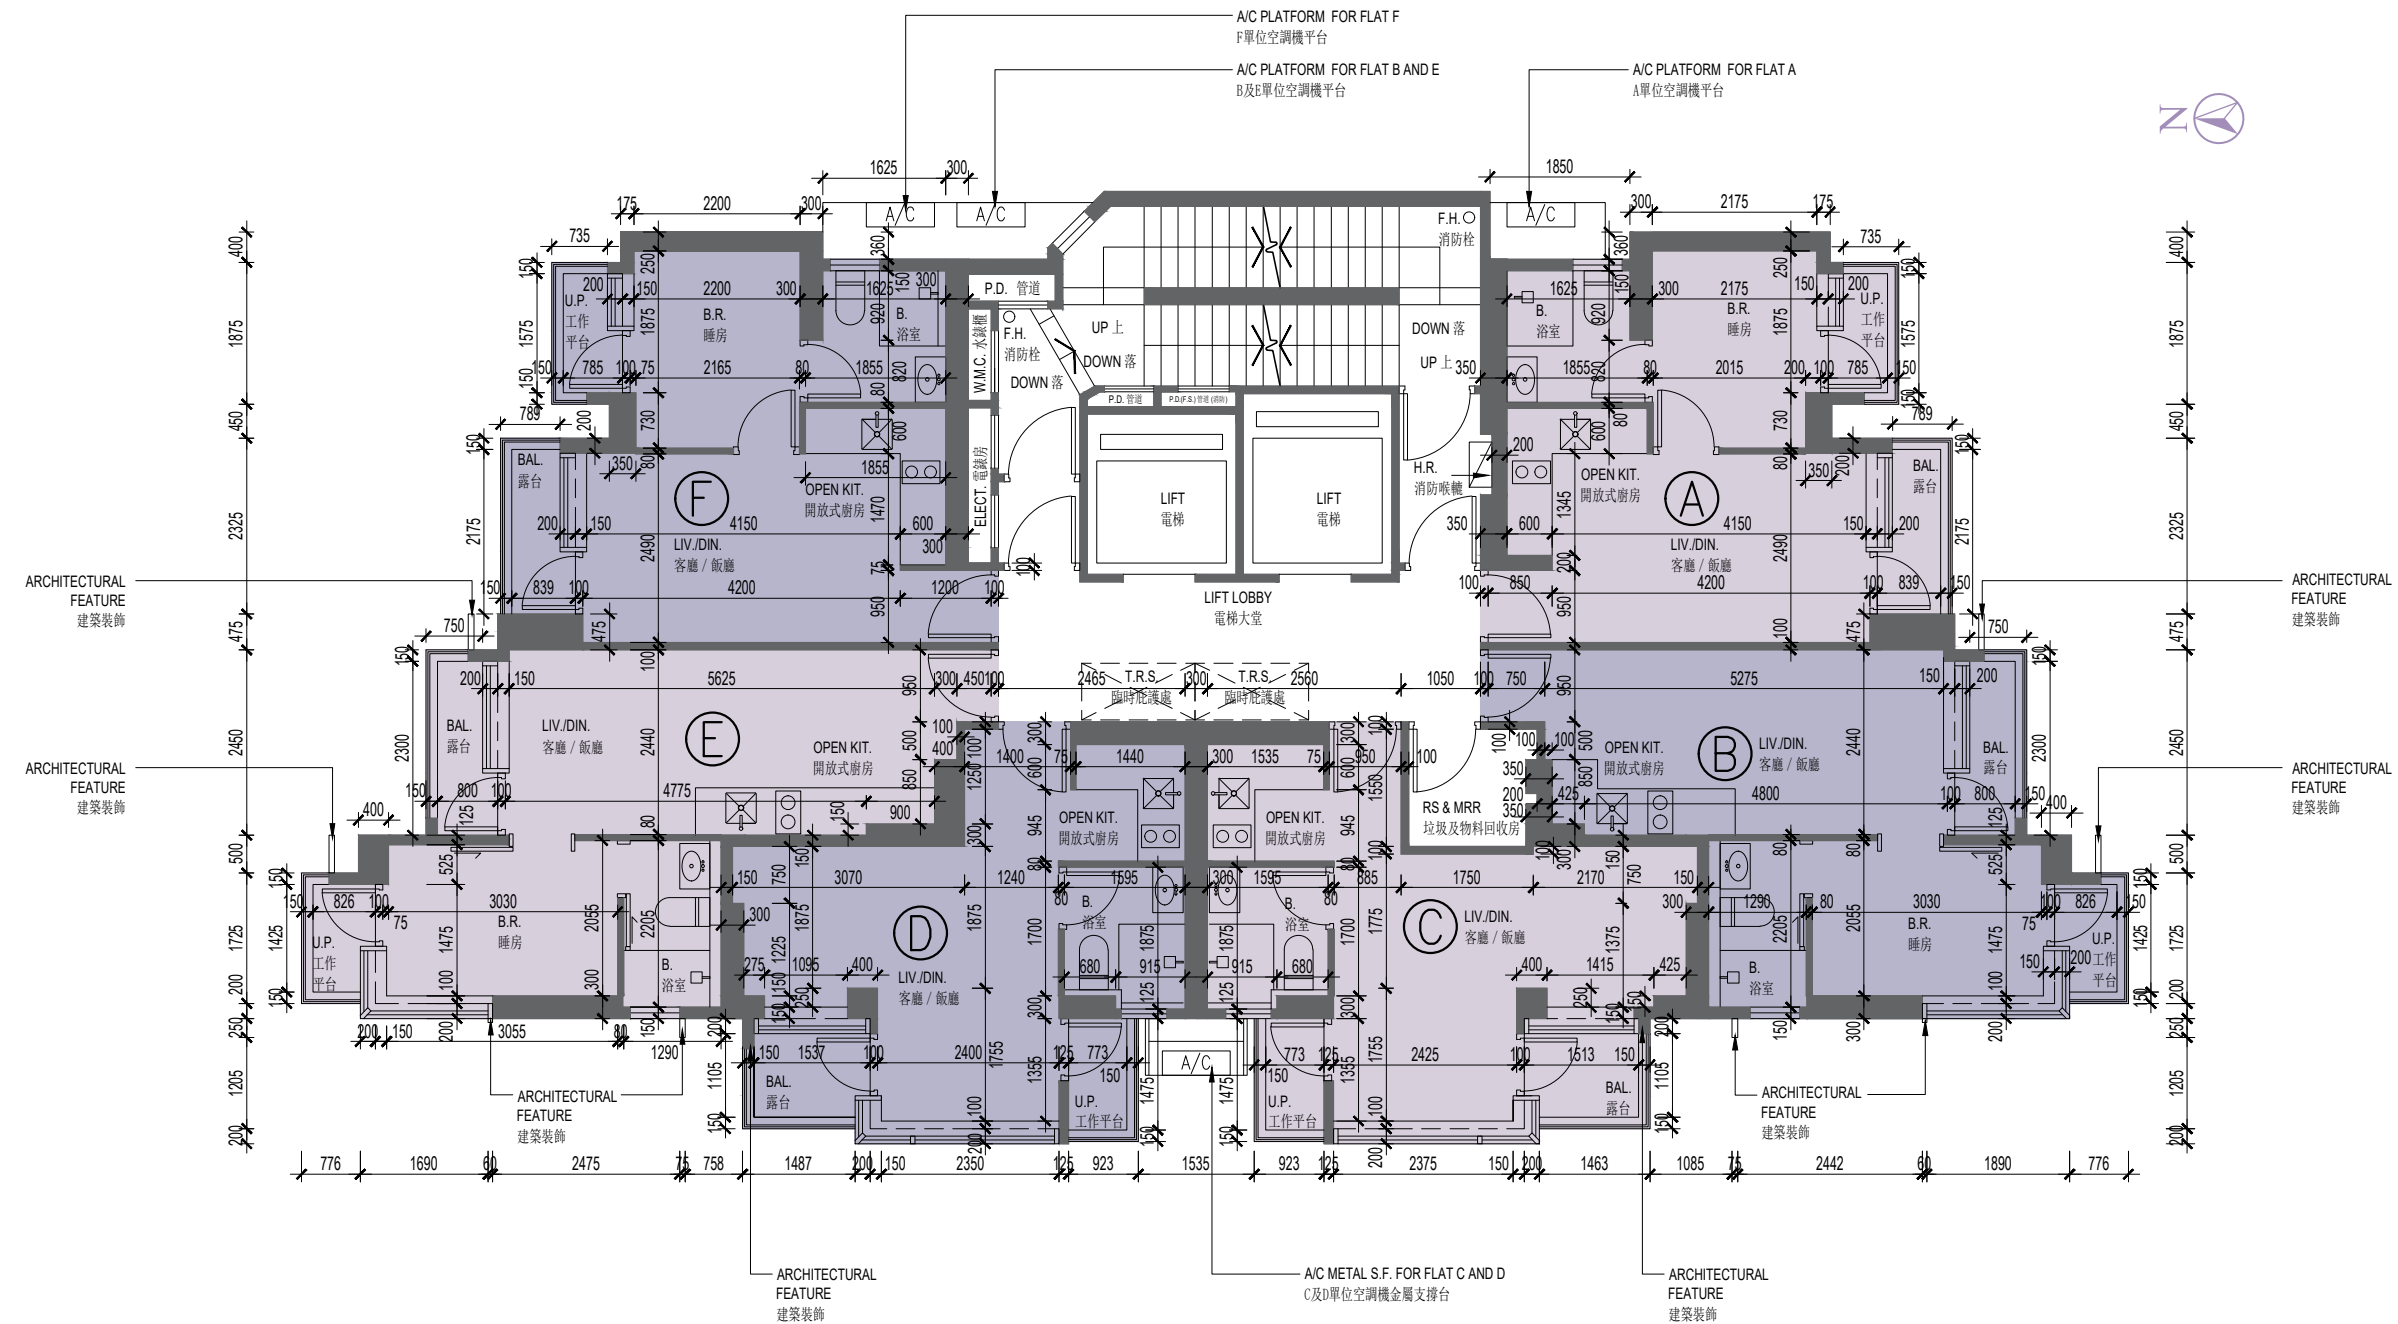

Notes 附註:

1. The dimensions of floor plans are all structural dimensions in millimetre.
樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. Please refer to page 36 of this sales brochure for notes and legend of terms and abbreviations shown on this floor plan.
請參閱本售樓說明書第36頁關於本平面圖上顯示的名詞及簡寫之附註及圖例。
3. 4/F, 14/F and 24/F are omitted. 22/F is refuge floor.
不設4樓、14樓及24樓。22樓為底護層。

Metre 米 Scale 比例
0 5

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

The thickness of the floor slabs (excluding plaster) and floor-to-floor height of each residential property of the Development as provided in the approved building plans are:
按發展項目經批准的建築圖則所規定，發展項目每個住宅物業的樓板 (不包括灰泥) 的厚度及層與層之間的高度為：

Floor 樓層	Flat 單位	Thickness of the Floor Slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	Floor-to-Floor Height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)
23/F & 25/F - 27/F 23樓及 25樓至27樓	A	150, 200	3150
	B	150, 300	3150
	C	150	3150
	D	150	3150
	E	150, 300	3150
	F	150, 200	3150
28/F 28樓	A	150	2850, 2900, 3100, 3150, 3200
	B	150, 300	2850, 2900, 3050, 3150, 3200, 3300, 3450
	C	150	2850, 3100, 3150, 3400
	D	150	2850, 3100, 3150, 3400
	E	150, 300	2850, 2900, 3050, 3150, 3200, 3300, 3450
	F	150	2850, 2900, 3100, 3150, 3200


The internal areas of the residential properties on the upper floors will be generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Note 附註：
Floor-to-floor height is inclusive of thickness of mass concrete fill on sunken slab.
層與層之間的高度包括跌級樓板上的無鋼筋混凝土填充層之厚度。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

29/F
29樓

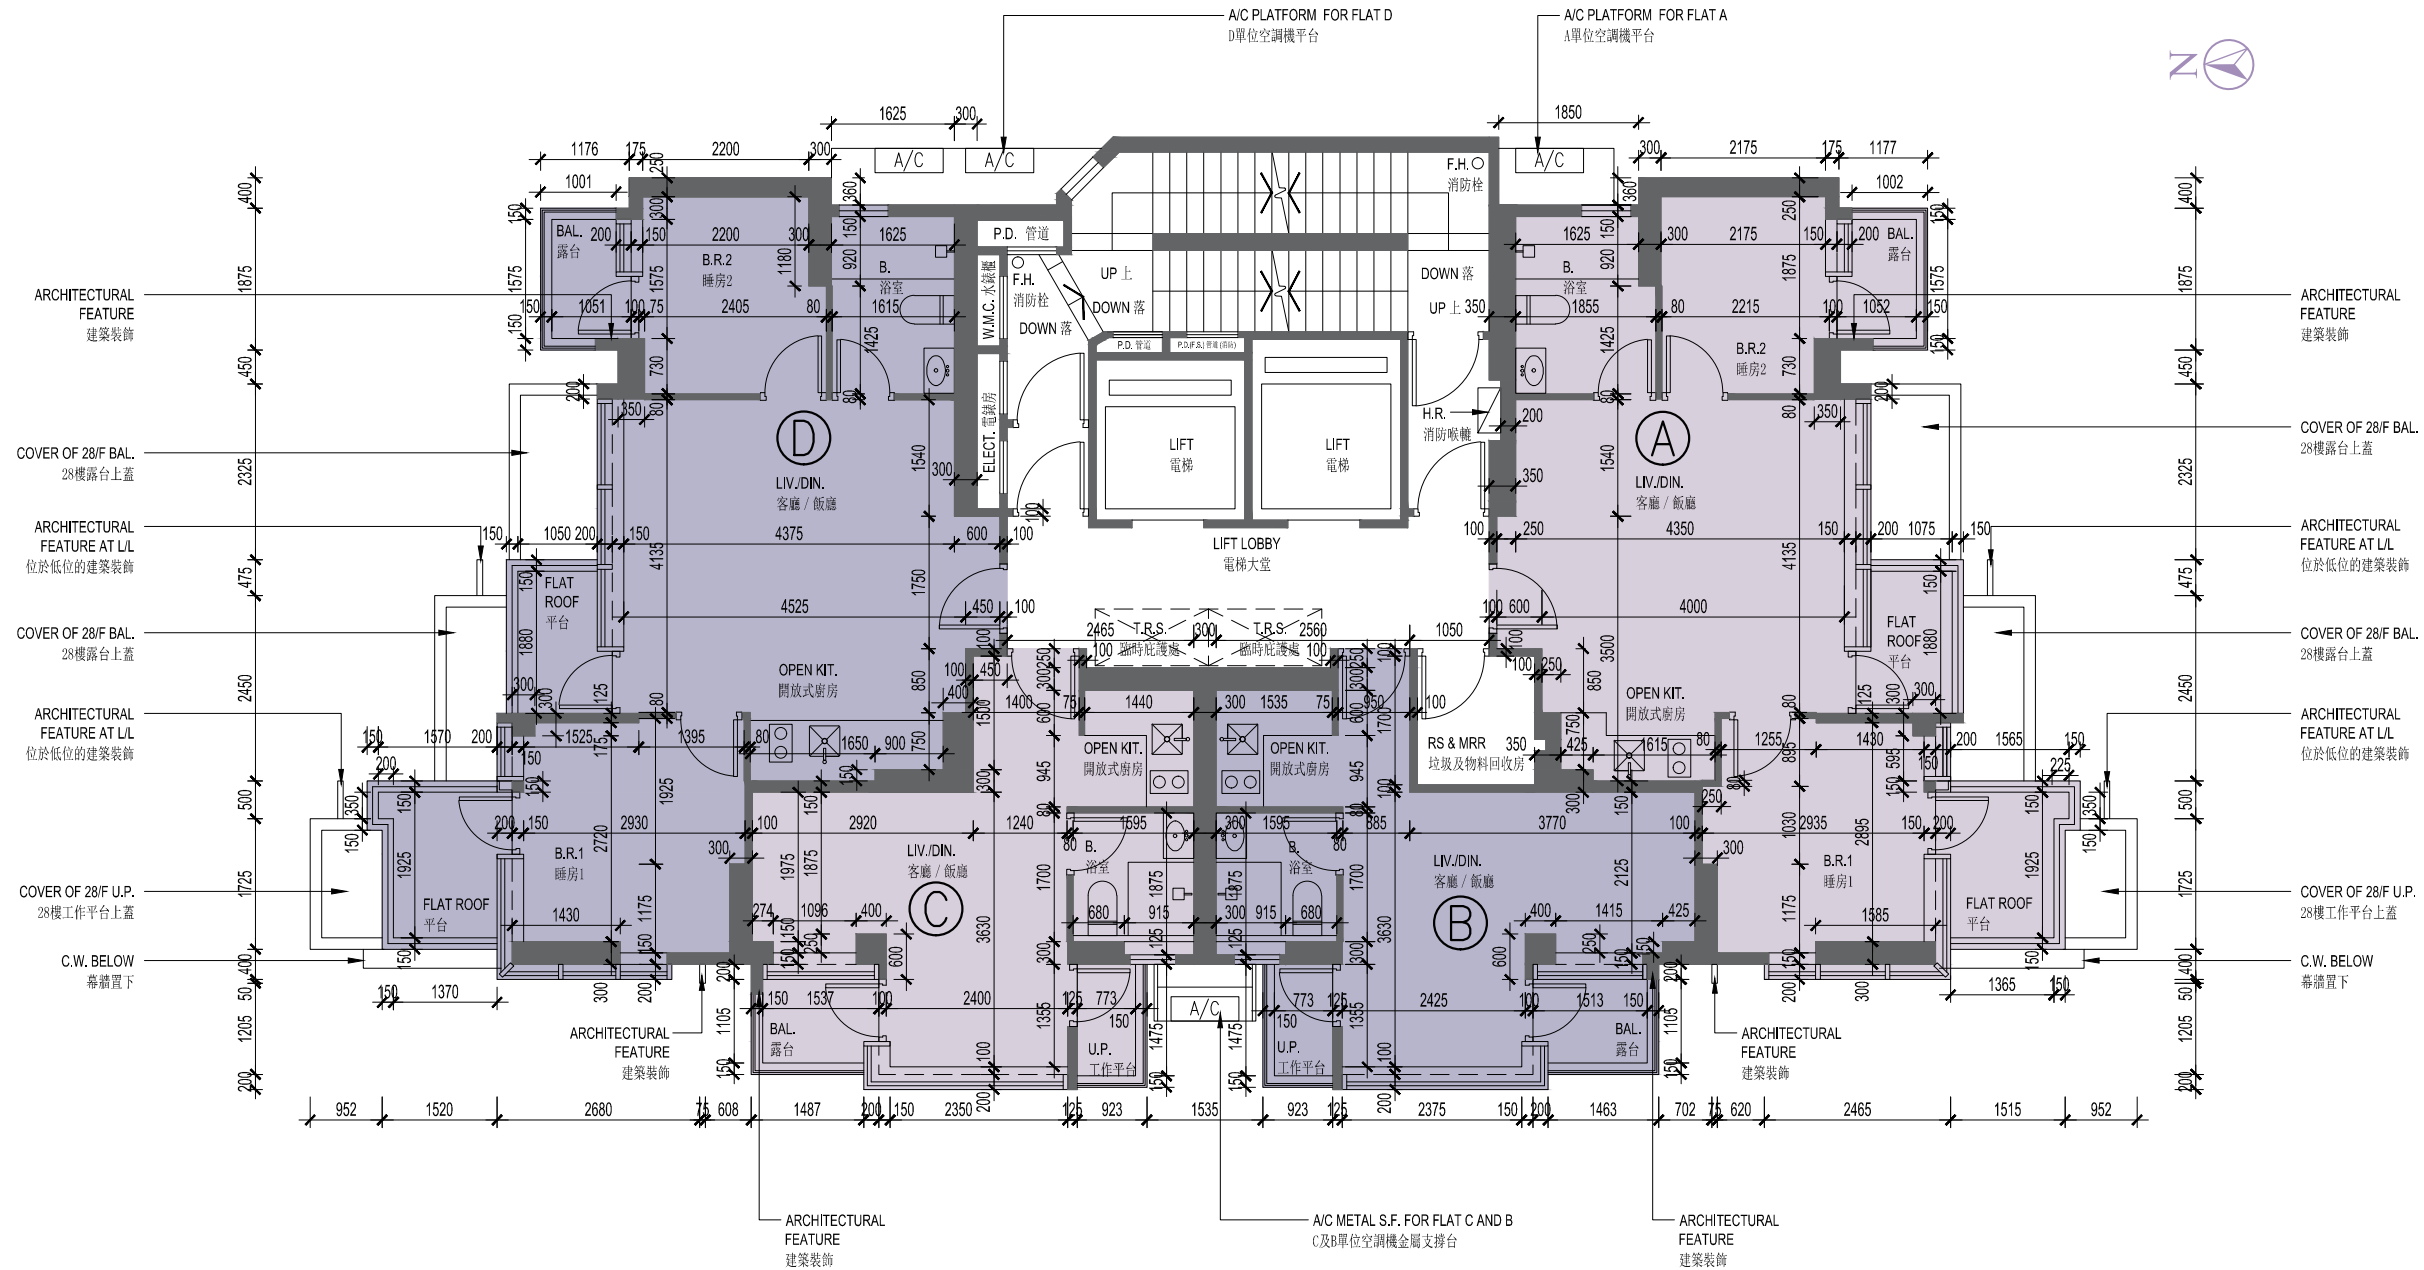

Notes 附註:

1. The dimensions of floor plans are all structural dimensions in millimetre.
樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. Please refer to page 36 of this sales brochure for notes and legend of terms and abbreviations shown on this floor plan.
請參閱本售樓說明書第36頁關於本平面圖上顯示的名詞及簡寫之附註及圖例。
3. 4/F, 14/F and 24/F are omitted. 22/F is refuge floor.
不設4樓、14樓及24樓。22樓為庇護層。

Scale 比例
Metre 米
0 5

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

The thickness of the floor slabs (excluding plaster) and floor-to-floor height of each residential property of the Development as provided in the approved building plans are:
按發展項目經批准的建築圖則所規定，發展項目每個住宅物業的樓板 (不包括灰泥) 的厚度及層與層之間的高度為：

Floor 樓層	Flat 單位	Thickness of the Floor Slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	Floor-to-Floor Height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)
29/F 29樓	A	150, 200	2900, 3150, 3200, 3450
	B	150	2800, 2850, 3100, 3150, 3200, 3450
	C	150	2800, 2850, 3100, 3150, 3200, 3450
	D	150, 200	2900, 3150, 3200, 3450


The internal areas of the residential properties on the upper floors will be generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Note 附註：
Floor-to-floor height is inclusive of thickness of mass concrete fill on sunken slab.
層與層之間的高度包括跌級樓板上的無鋼筋混凝土填充層之厚度。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT


發展項目的住宅物業的樓面平面圖

30/F
30樓

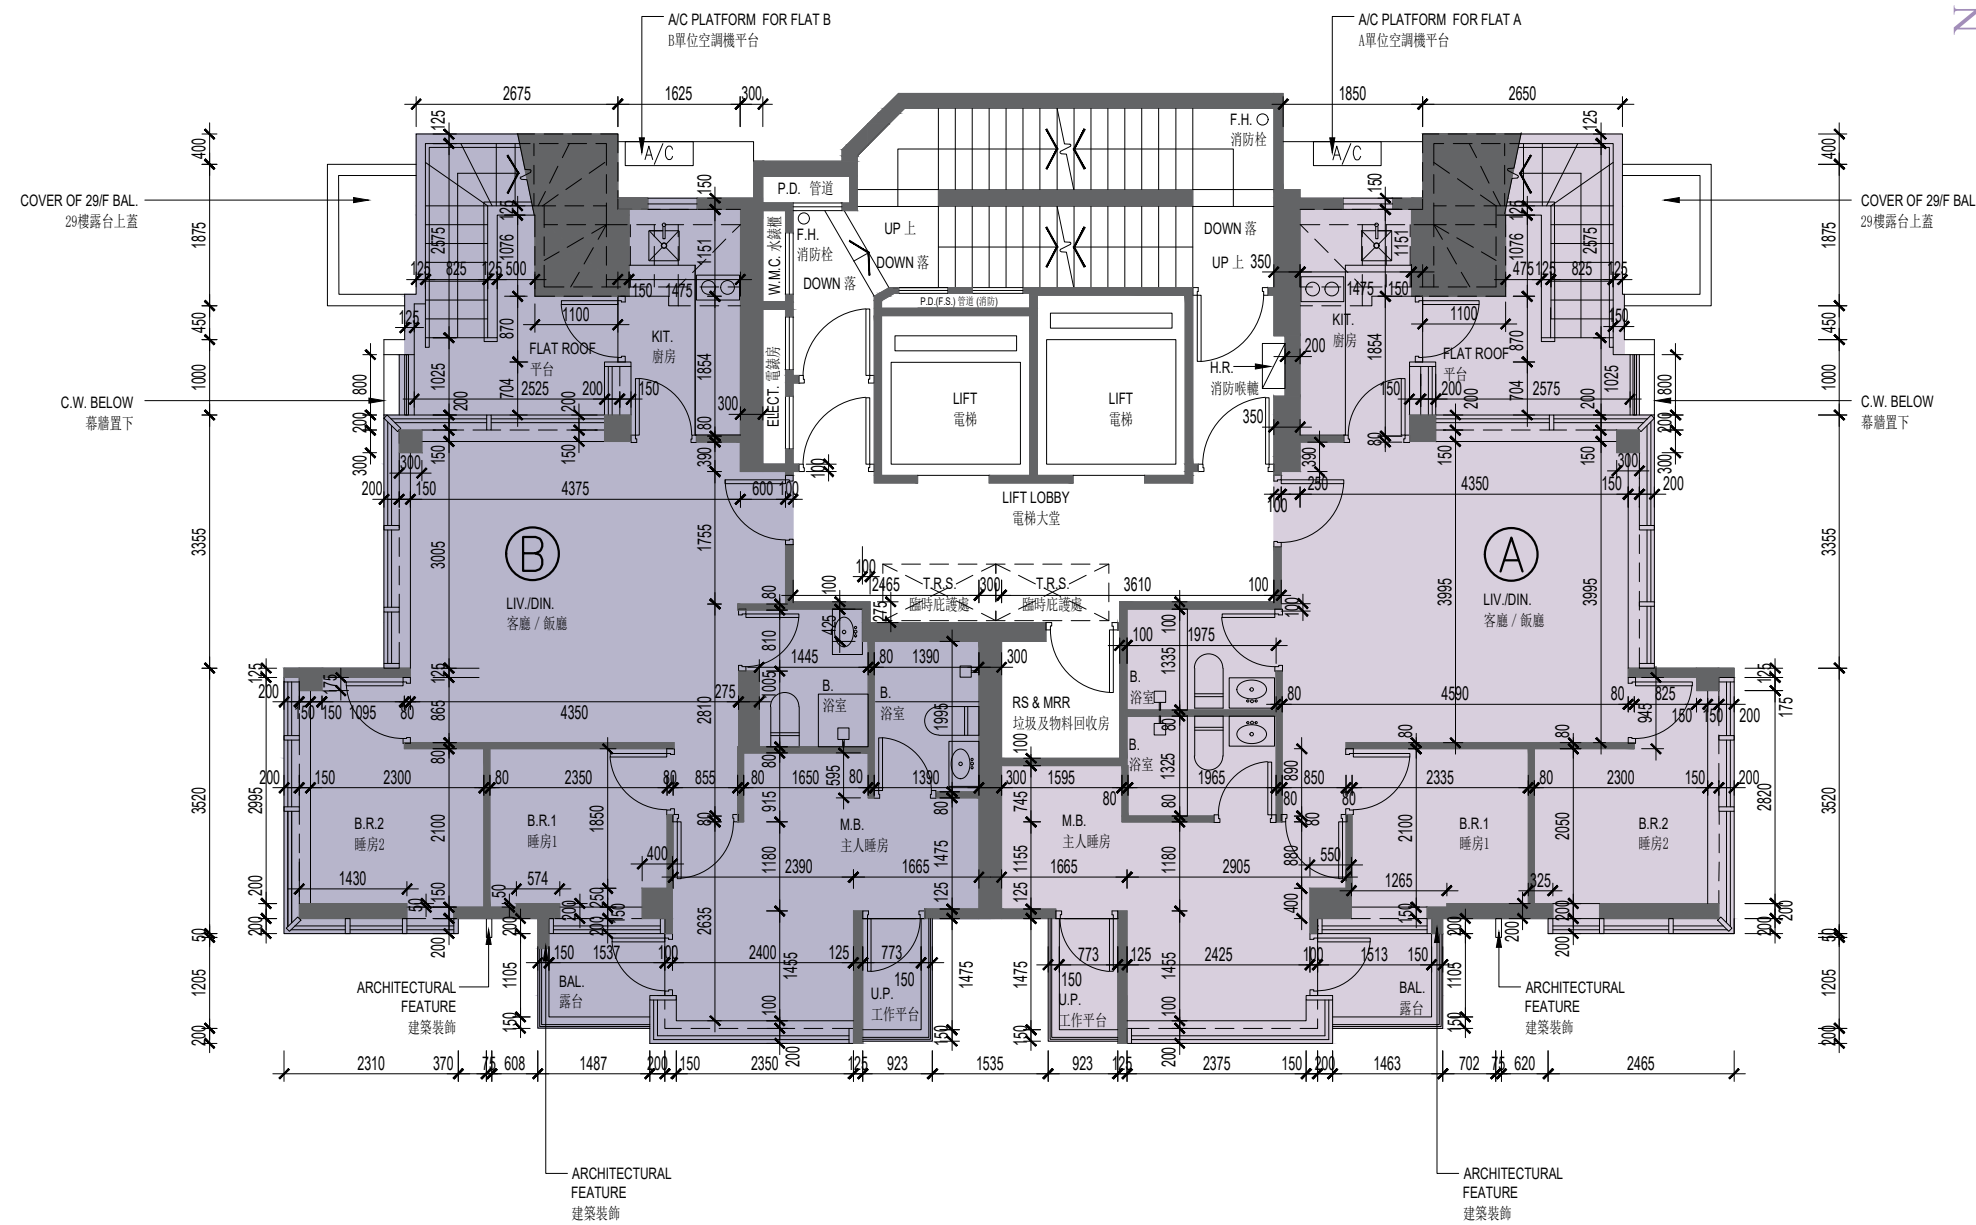

Notes 附註:

1. The dimensions of floor plans are all structural dimensions in millimetre.
樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. Please refer to page 36 of this sales brochure for notes and legend of terms and abbreviations shown on this floor plan.
請參閱本售樓說明書第36頁關於本平面圖上顯示的名詞及簡寫之附註及圖例。
3. 4/F, 14/F and 24/F are omitted. 22/F is refuge floor.
不設4樓、14樓及24樓。22樓為庇護層。



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

The thickness of the floor slabs (excluding plaster) and floor-to-floor height of each residential property of the Development as provided in the approved building plans are:
按發展項目經批准的建築圖則所規定，發展項目每個住宅物業的樓板 (不包括灰泥) 的厚度及層與層之間的高度為：

Floor 樓層	Flat 單位	Thickness of the Floor Slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	Floor-to-Floor Height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)
30/F 30樓	A	150	3500, 3850
	B	150	3500, 3850


The internal areas of the residential properties on the upper floors will be generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Note 附註：
Floor-to-floor height is inclusive of thickness of mass concrete fill on sunken slab.
層與層之間的高度包括跌級樓板上的無鋼筋混凝土填充層之厚度。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT


發展項目的住宅物業的樓面平面圖

Roof
天台

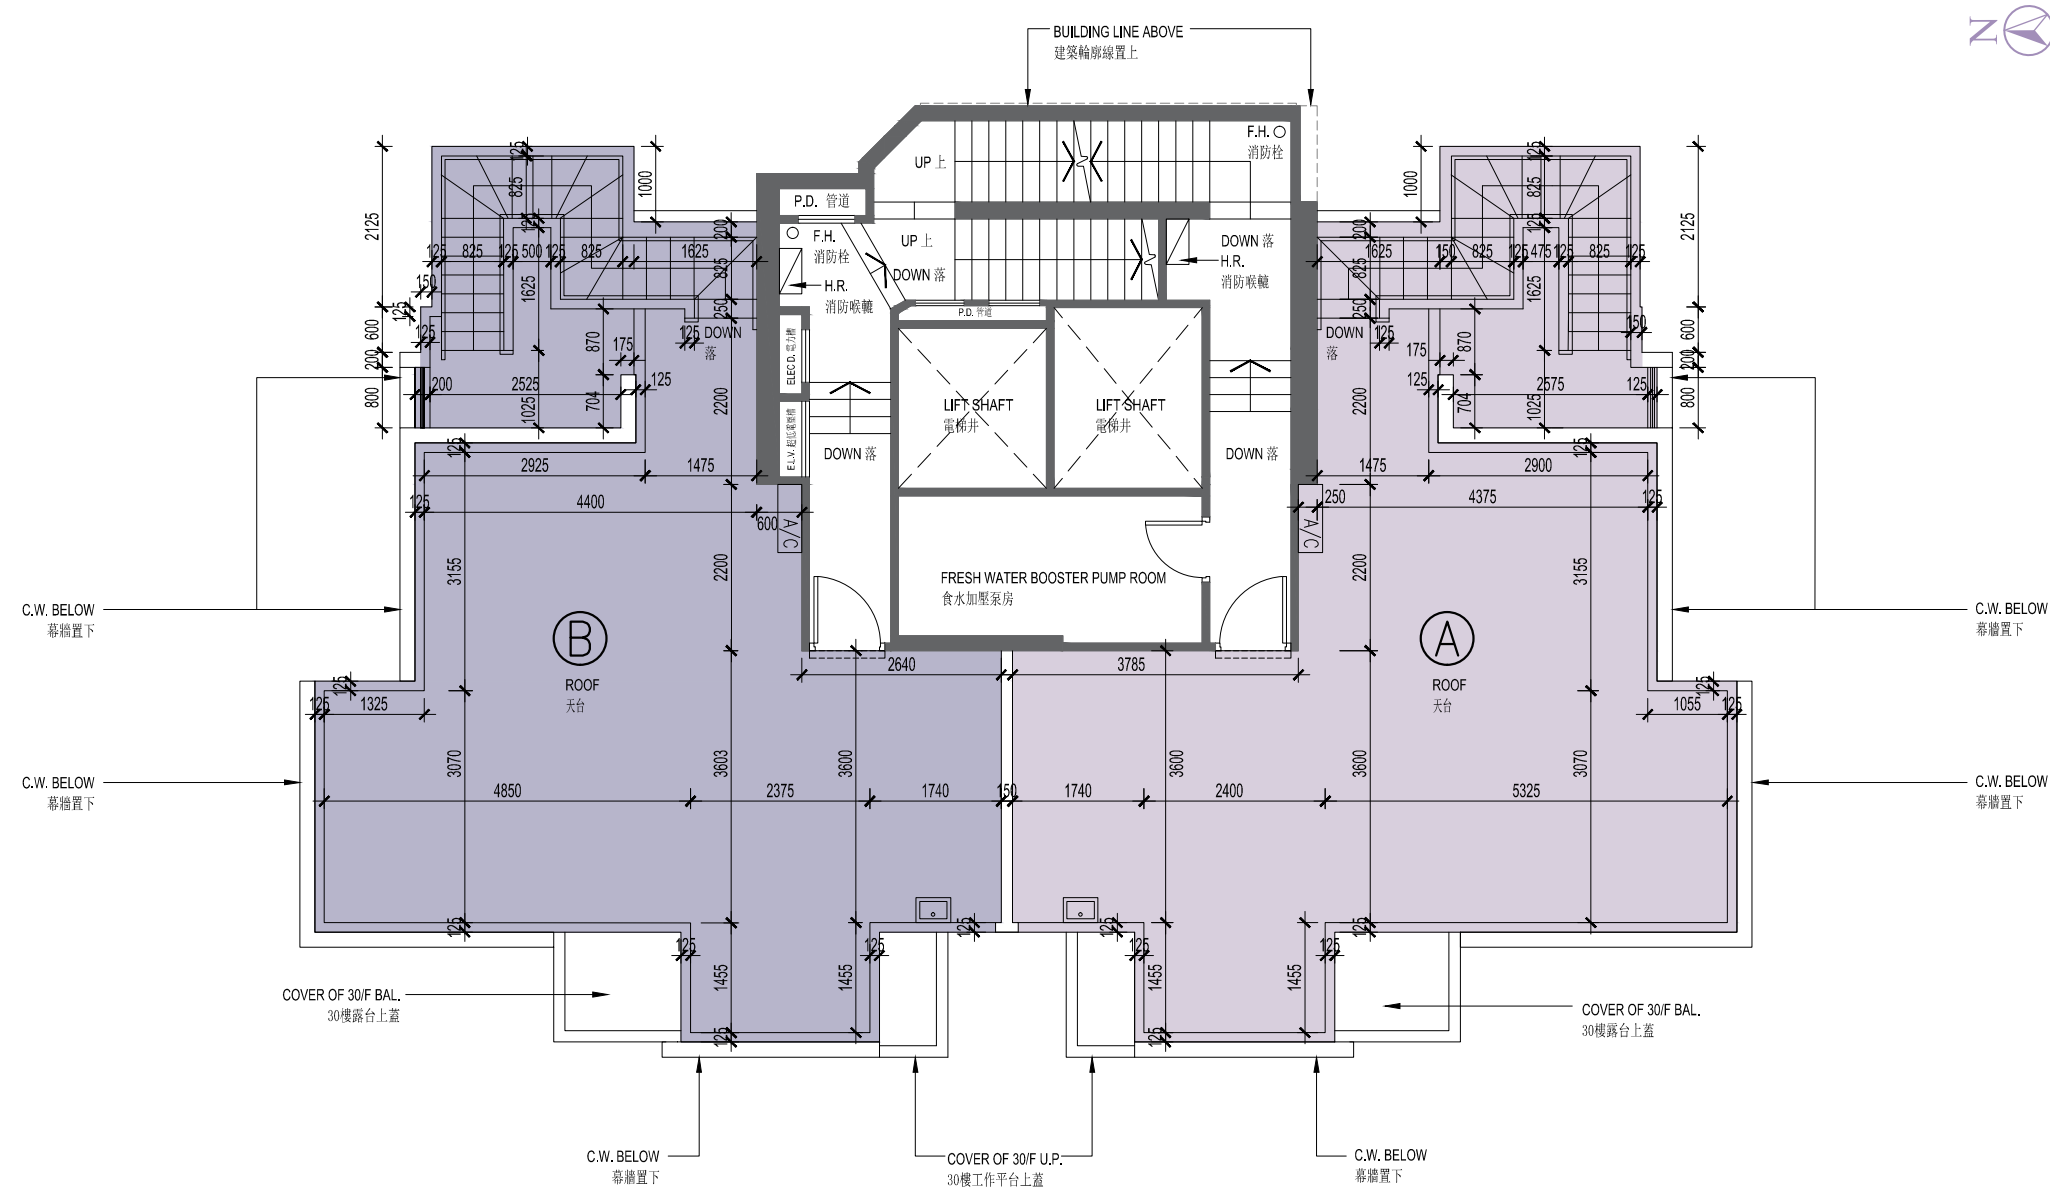

Notes 附註:

1. The dimensions of floor plans are all structural dimensions in millimetre.
樓面平面圖之尺規所列數字為以毫米標示之建築結構尺寸。
2. Please refer to page 36 of this sales brochure for notes and legend of terms and abbreviations shown on this floor plan.
請參閱本售樓說明書第36頁關於本平面圖上顯示的名詞及簡寫之附註及圖例。
3. 4/F, 14/F and 24/F are omitted. 22/F is refuge floor.
不設4樓、14樓及24樓。22樓為庇護層。



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

The thickness of the floor slabs (excluding plaster) and floor-to-floor height of each residential property of the Development as provided in the approved building plans are:
按發展項目經批准的建築圖則所規定，發展項目每個住宅物業的樓板 (不包括灰泥) 的厚度及層與層之間的高度為：

Floor 樓層	Flat 單位	Thickness of the Floor Slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	Floor-to-Floor Height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)
Roof 天台	A	Not Applicable 不適用	Not Applicable 不適用
	B	Not Applicable 不適用	Not Applicable 不適用

The internal areas of the residential properties on the upper floors will be generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

Note 附註：
Floor-to-floor height is inclusive of thickness of mass concrete fill on sunken slab.
層與層之間的高度包括跌級樓板上的無鋼筋混凝土填充層之厚度。

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖

LEGEND OF THE TERMS AND ABBREVIATIONS USED ON THE FLOOR PLANS:
樓面平面圖中所使用之名詞及簡稱之圖例：

A/C METAL S.F. FOR FLAT x	= Air-conditioning Metal Supporting Frame For Flat x	X單位空調機金屬支撐台	F.H.	= Fire Hydrant	消防栓
A/C PLATFORM FOR FLAT x	= Air-conditioning Platform For Flat x	X單位空調機平台	H.R.	= Hose Reel	消防喉轆
ARCHITECTURAL FEATURE AT L/L	= Architectural Feature At Low Level	位於低位的建築裝飾	KIT.	= Kitchen	廚房
BAL.	= Balcony	露台	LIV./DIN.	= Living Room/ Dining Room	客廳/飯廳
BAL. ABOVE	= Balcony Above	露台置上	M.B.	= Master Bedroom	主人睡房
B.	= Bathroom	浴室	OPEN KIT.	= Open Kitchen	開放式廚房
B.R.	= Bedroom	睡房	P.D.	= Pipe Duct	管道
B.R.1	= Bedroom 1	睡房1	P.D. (F.S.)	= Pipe Duct (Fire Service)	管道(消防)
B.R.2	= Bedroom 2	睡房2	RS & MRR	= Refuse Storage & Material Recovery Room	垃圾及物料回收房
COVER OF xx/F BAL.	= Cover Of xx/F Balcony	XX樓露台上蓋	TOP OF TRANSFER PLATE FOR PLACING A/C UNIT FOR FLAT x	= Top Of Transfer Plate For Placing Air-conditioning Unit For Flat x	X單位空調機安置於結構轉換層頂部
COVER OF xx/F U.P.	= Cover Of xx/F Utility Platform	XX樓工作平台上蓋	T.R.S.	= Temporary Refuge Space	臨時庇護處
C.W. BELOW	= Curtain Wall Below	幕牆置下	U.P.	= Utility Platform	工作平台
ELECT.	= Electrical Meter Room	電錶房	U.P. ABOVE	= Utility Platform Above	工作平台置上
ELEC D.	= Electricity Duct	電力槽	W.M.C.	= Water Meter Cabinet	水錶櫃
E.L.V.	= Extra Low Voltage Duct	超低電壓槽			

- Notes:
- There may be architectural features on external walls of some floors.
 - Common pipes exposed and/ or enclosed in cladding are located at/ adjacent to balcony and/ or flat roof and/ or roof and/ or utility platform and/ or air-conditioning platform and/ or external wall of some residential flats.
 - There are sunken slabs and/ or ceiling bulkheads and/ or false ceiling at living rooms/ dining rooms, bedrooms, bathrooms, open kitchens and kitchens of some residential flats for the air-conditioning system and/ or mechanical and electrical services.
 - Balconys and utility platfroms are non-enclosed areas.
 - Symbols of fittings and fitments shown on the floor plans, such as bathtubs, sink, water closets, shower, sink counter, pipe screen etc, are architectural symbols extracted from the latest approved general building plans for general indication only.
 - For some residential flats, the air-conditioning platform(s) or air-conditioning metal supporting frame(s) outside the flat is/are placed with split type air-conditioner (outdoor unit)(s) belonging to that flats and/or other residential flats.

- 附註：
- 部份樓層外牆設有建築裝飾。
 - 部份住宅單位的露台及/或平台及/或天台及/或工作平台及/或空調機平台及/或外牆設有外露及/或面板內藏之公用喉管。
 - 部份住宅單位的客廳/飯廳、睡房、浴室、開放式廚房及廚房天花有跌級樓板及/或假陣及/或假天花用以裝置冷氣系統及/或機電設備。
 - 露台及工作平台為不可圍封的地方。
 - 樓面平面圖上所顯示的形象裝置符號，例如浴缸、洗滌盆、坐廁、花灑、洗滌盆櫃、管道裝飾等乃摘自最新的經批准的建築圖則，只作一般性標誌。
 - 部份住宅單位外的空調機平台或空調機金屬支撐台放置屬於其單位及/或其他住宅單位的一部或多部分體式空調機(室外機)。