

Legend of Terms and Abbreviations on Floor Plans:
樓面平面圖中的名稱及簡稱:


A.D. = Air Duct = 風槽	HOPPER = 漏斗
A.F. = Architectural Feature = 建築裝飾	INACCESSIBLE FLAT ROOF = 不可內進之平台
A.F. AT H/L = Architectural Feature at High Level = 建築裝飾置上	JACUZZI = 按摩浴缸
A.F. AT H/L OF 17/F, 19/F, 21/F, 23/F, 26/F, 28/F & 30/F = Architectural Feature at High Level of 17/F, 19/F, 21/F, 23/F, 26/F, 28/F & 30/F = 於17樓, 19樓, 21樓, 23樓, 26樓, 28樓及30樓的建築裝飾置上	KIT. = Kitchen = 廚房
A.F. AT H/L OF 2/F, 5/F, 7/F, 9/F, 11/F & 15/F = Architectural Feature at High Level of 2/F, 5/F, 7/F, 9/F, 11/F & 15/F = 於2樓, 5樓, 7樓, 9樓, 11樓及15樓的建築裝飾置上	KIT.1 = Kitchen 1 = 廚房1
A.F. AT H/L OF 2/F, 5/F, 7/F, 9/F, 11/F, 15/F, 17/F, 19/F, 21/F, 23/F, 26/F, 28/F & 30/F = Architectural Feature at High Level of 2/F, 5/F, 7/F, 9/F, 11/F, 15/F, 17/F, 19/F, 21/F, 23/F, 26/F, 28/F & 30/F = 於2樓, 5樓, 7樓, 9樓, 11樓, 15樓, 17樓, 19樓, 21樓, 23樓, 26樓, 28樓及30樓的建築裝飾置上	LIFT = 升降機
A.F. AT H/L OF 5/F, 7/F, 9/F, 11/F, 15/F, 17/F, 19/F, 21/F, 23/F, 26/F, 28/F & 30/F = Architectural Feature at High Level of 5/F, 7/F, 9/F, 11/F, 15/F, 17/F, 19/F, 21/F, 23/F, 26/F, 28/F & 30/F = 於5樓, 7樓, 9樓, 11樓, 15樓, 17樓, 19樓, 21樓, 23樓, 26樓, 28樓及30樓的建築裝飾置上	LIFT LOBBY = 升降機大堂
A.F. AT L/L = Architectural Feature at Low Level = 建築裝飾置下	LIFT SHAFT = 升降機槽
A/C HOOD = Air-conditioning Hood = 空調機位	LIV. = Living Room = 客廳
A/C PLATFORM = Air-conditioning Platform = 空調機平台	LIV. & DIN. = Living Room & Dining Room = 客廳及飯廳
A/C PLINTH = Air-conditioning Plinth = 空調機台	LOUVRE AT H/L = Louvre at High Level = 百葉置上
A/C PLATFORM ABOVE = Air-conditioning Platform Above = 上層空調機平台	M.BATH = Master Bathroom = 主人浴室
BAL. = Balcony = 露台	M.BATH1 = Master Bathroom 1 = 主人浴室1
BAL. ABOVE = Balcony Above = 上層露台	MBR = Master Bedroom = 主人睡房
BATH = Bathroom = 浴室	OPEN KIT. = Open Kitchen = 開放式廚房
BATH1 = Bathroom 1 = 浴室1	P.D. = Pipe Duct = 管道槽
BATH2 = Bathroom 2 = 浴室2	P.D. ROOM = Pipe Duct Room = 管道房
BATH3 = Bathroom 3 = 浴室3	PLANTER = 花槽
BR2 = Bedroom 2 = 睡房2	POWDER ROOM = 化妝間
BR3 = Bedroom 3 = 睡房3	PRIVATE FLAT ROOF = 私人平台
BR4 = Bedroom 4 = 睡房4	PRIVATE GARDEN = 私人花園
BUILDING LINE ABOVE = 上層建築物邊界	PRIVATE LIFT LOBBY FOR UNIT A = A單位的私人升降機大堂
COMMON AREA FOR MAINTENANCE = 維修用公共空間	PRIVATE LIFT LOBBY FOR UNIT B = B單位的私人升降機大堂
COVER OF BALCONY BELOW = 下層露台的頂部	RS/MRR = Refuse Storage and Material Recovery Room = 垃圾及物料回收房
DIN. = Dining Room = 飯廳	ST. / STO. / STORE = Store Room = 儲物室
DN. = DN = Down = 落	T. = Toilet = 洗手間
EL. DUCT = Electrical Duct = 電槽	T1 = Tower 1 = 第1座
EL. RM. = EL. ROOM = Electrical Meter Room = 電錶房	T1A = Tower 1A = 第1A座
ELV = Extra-Low Voltage Room = 弱電房	T2 = Tower 2 = 第2座
F.A.D. = Fresh Air Duct = 鮮風槽	T2A = Tower 2A = 第2A座
F.S. P.D. & P.D. = Fire Services Pipe Duct and Pipe Duct = 消防管道槽及管道槽	TOP OF A/C HOOD = Top of Air-conditioning Hood = 空調機位頂部
FAMILY = Family Room = 家庭廳	U.P. = Utility Platform = 工作平台
FLAT ROOF = 平台	U.P. ABOVE = Utility Platform Above = 上層工作平台
FLAT ROOF FOR A/C UNIT = 供空調機用平台	UP = Up = 上
FLUSHING WATER PUMP ROOM = 沖廁水泵房	UPPER PART OF V.R.V. AREA = Upper Part of Variable Refrigerant Volume Area = 可變冷媒流量空調機區域的上部份
H.R. = Hose Reel = 消防喉轆	UTILITY = Utility Room = 多用途房
	V.R.V. AREA = Variable Refrigerant Volume Area = 可變冷媒流量空調機區域
	VOID = 中空
	WALK-IN CLOSET = 衣帽間
	WMC = Water Meter Cabinet = 水錶櫃
	WMR = Water Meter Room = 水錶房

Remarks applicable to floor plans of residential properties in the Development:

1. The dimensions of the floor plans are all structural dimensions in millimetre.
2. Balconies and utility platforms are non-enclosed areas.
3. There may be architectural features and / or exposed pipes on external walls and common flat roof of some floors.
4. There may be ceiling bulkheads or suspended ceiling at living room, dining room, bedroom, powder room, utility room, corridor, bathroom, store room, toilet, open kitchen and/ or kitchen of some residential properties for the air-conditioning system and/or conduits and/ or Mechanical & Electrical services.
external walls and is measured from the exterior of such non-structural prefabricated external walls.
5. The indications of fittings such as sinks, bathtubs, toilet bowls and wash basin, etc. shown on the floor plans are indications of approximate locations only and not indications of their actual size, design or shapes.
6. Common drain pipes enclosed in cladding are located adjacent to Balcony and/or Utility Platform of some residential properties.

適用於發展項目的住宅物業樓面平面圖之備註：

1. 樓面平面圖之尺寸所列數字為以毫米標示之建築結構尺寸。
2. 露台及工作平台為不可封閉的地方。
3. 部份樓層外牆及公用平台設有建築裝飾及/或外露喉管。
4. 部份住宅單位的客廳、飯廳、睡房、化妝間、多用途房、走廊、浴室、儲物室、洗手間、開放式廚房及/或廚房之裝飾橫樑或假天花內裝置空調系統及/或喉管及/或其他機電設備。
5. 樓面平面圖上所示之裝置如洗滌盆、浴缸、坐廁及洗面盆等只供展示其大約位置而非展示其實際大小、設計或形狀。
6. 部份住宅物業的露台及/或工作平台側外牆裝飾板內飾板內藏公用水渠。



11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖


TOWER 1 第1座

1/F FLOOR PLAN 1樓樓面平面圖

Key Plan 索引圖



Scale 比例 : 0 5M (米)



TOWER 1 第 1 座
1/F FLOOR PLAN 1 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1 第 1 座						
		Flat 單位						
		A	B	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	1/F 1樓	150	150	150	150	150	150	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3300*, 3350*, 3400*, 3600*, 3650*	3150, 3350*, 3600*, 3650*	3150, 3350*, 3600*, 3650*	3150, 3350*, 3400*, 3600*, 3650*	3350*, 3400*, 3600*, 3650*, 3810#, 4060#	3350*, 3400*, 3600*, 3650*, 4060#, 3810#, 4250*	3350*, 3400*, 3600*, 3650*, 4060#

* Inclusive of the thickness of mass concrete fill on sunken slab.
Inclusive of the thickness of mass concrete fill and/or planting soil on private garden.


* 包括跌級樓板上之混凝土填充層厚度。
包括私人花園上之混凝土填充層及/或種植土壤的厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

- Notes:
- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
 - "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

- 備註：
- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
 - "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖


TOWER 1 第1座

2/F FLOOR PLAN 2樓樓面平面圖

Key Plan 索引圖

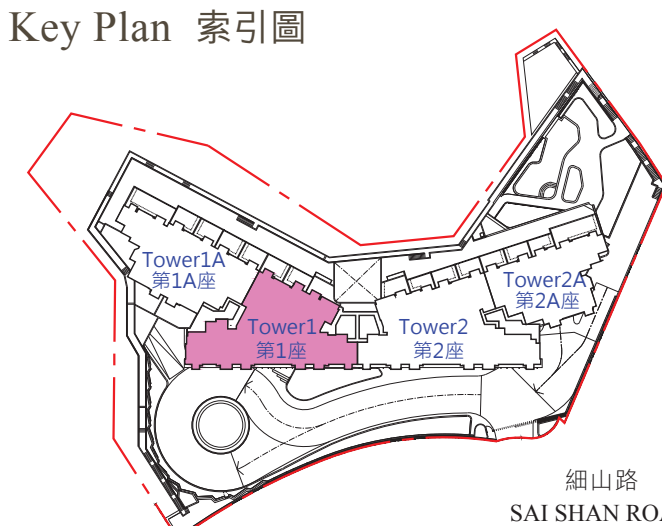

Scale 比例 : 0 5M (米)



TOWER 1 第 1 座
2/F FLOOR PLAN 2 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1 第 1 座						
		Flat 單位						
		A	B	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	2/F 2樓	150	150	150	150	150	150	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- 1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- 2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- 2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖


TOWER 1 第1座

3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F FLOOR PLAN 3樓、5樓至12樓、15樓至23樓、25樓至31樓樓面平面圖

Key Plan 索引圖

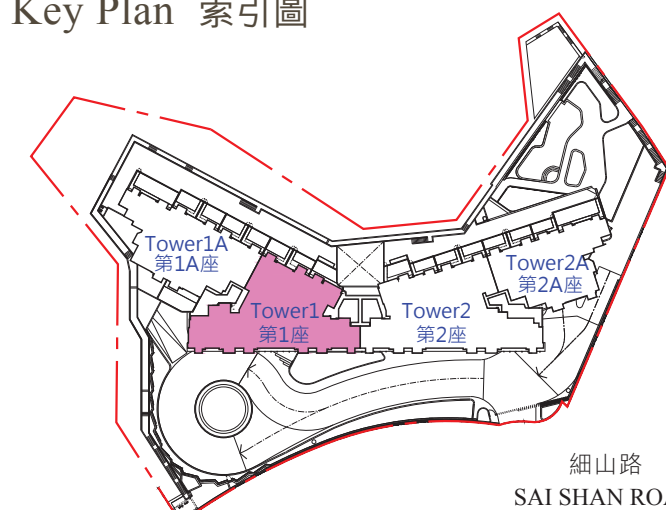

Scale 比例 : 0 5M (米)



TOWER 1 第 1 座

3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F FLOOR PLAN 3 樓、5 樓至 12 樓、15 樓至 23 樓、25 樓至 31 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1 第 1 座						
		Flat 單位						
		A	B	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F 3樓、 5樓至12樓、 15樓至23樓、 25樓至31樓	150	150	150	150	150	150	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- 1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- 2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- 2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖


TOWER 1 第1座

32/F FLOOR PLAN 32樓樓面平面圖

Key Plan 索引圖

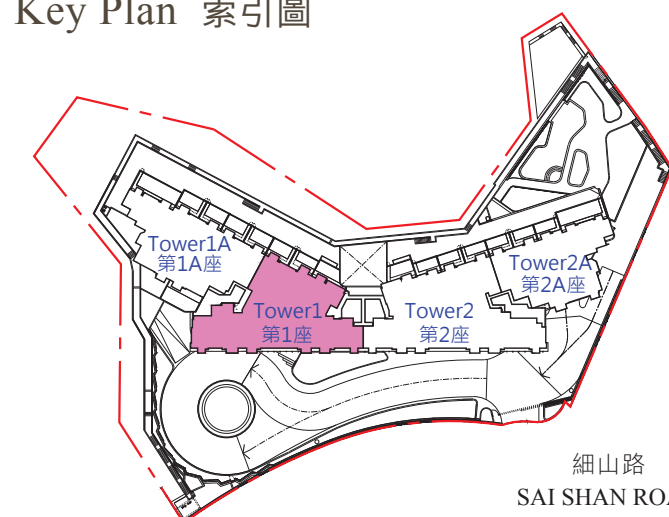

Scale 比例 : 0 5M (米)



TOWER 1 第 1 座
32/F FLOOR PLAN 32 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1 第1座						
		Flat 單位						
		A	B	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	32/F 32樓	150	150	150	150	150	150	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3400*, 3450, 3450*, 3500, 3550*, 3750*,3800*, 3850*	3450*, 3500, 3550*, 3800*	3450*, 3500, 3550*, 3800*	3150, 3200*, 3450, 3450*, 3500, 3550*, 3750*, 3800*	3500, 3500*	3500, 3500*	3500, 3500*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

- Notes:
- 備註：
1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.

1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。

2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖


TOWER 1 第1座

33/F FLOOR PLAN 33樓樓面平面圖

Key Plan 索引圖

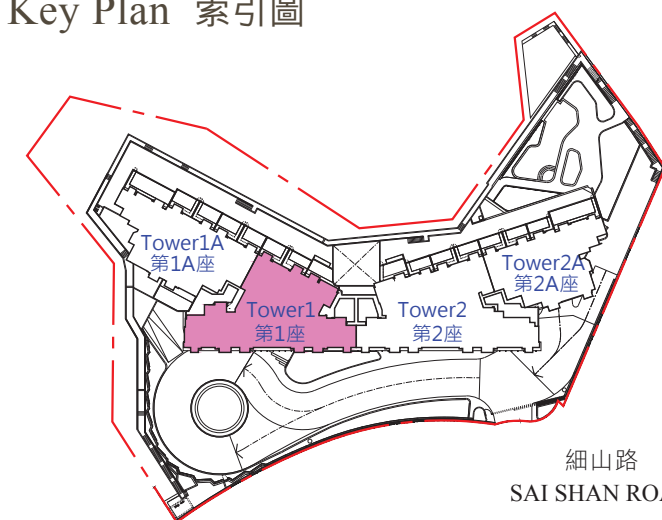

Scale 比例 : 0 5M (米)



TOWER 1 第 1 座
33/F FLOOR PLAN 33 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1 第 1 座				
		Flat 單位				
		A	B	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	33/F 33樓	150, 200	150, 250	150	150	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3450*, 3500, 3550*, 3850*	3150, 3500, 3500*, 3550*, 3850*	3200, 3250*, 3450*, 3500, 3800*	3200, 3500, 3550*, 3750*, 3800*	3200, 3500, 3550*, 3750*, 3800*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖

TOWER 1 第1座

35/F FLOOR PLAN 35樓樓面平面圖

Key Plan 索引圖

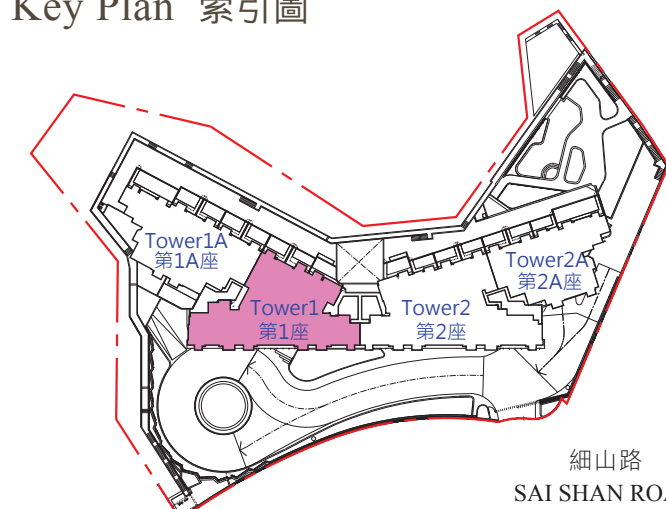


Remarks:

Alteration works have been made to Flat A on 33/F&35/F of Tower 1, and such alteration works are minor works or exempted works under the Buildings Ordinance (Cap. 123). The “as-is” layout plan of 35/F of Tower 1 on page 33A shows the approximate locations of the alterations. Details of the relevant alterations are set out on page 33A.

備註：

第1座33樓及35樓A單位已被作出改動工程，該改動工程屬於小型工程或《建築物條例》(第123章)下的豁免工程。33A頁的第1座35樓現狀平面圖顯示改動的大約位置。有關改動的細節請見第33A頁。

Scale 比例：0 5M (米)



TOWER 1 第 1 座
35/F FLOOR PLAN 35 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1 第 1 座	
		Flat 單位	
		A	B
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	35/F 35樓	150, 225	150, 200
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3500, 3800*, 3850*, 3900*	3500, 3850*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖

TOWER 1 第1座

35/F FLOOR PLAN IN "AS-IS" LAYOUT 35樓樓面現狀平面圖



Key Plan 索引圖

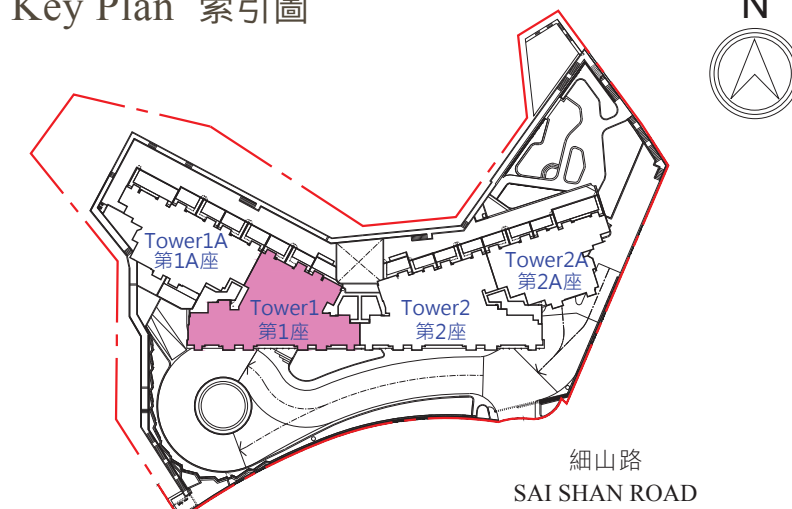

Remarks:

This page is the additional information mentioned in the remarks on Page 32.

備註：

本頁是第32頁備註附加資料。


Details of the relevant alterations are as follows:

1. Sink of Private Flat Roof has been relocated to a new location.
2. Railing of staircase at 35/F has been shortened.

有關改動的細節如下：

1. 私人平台的洗滌盆已被轉移到新的位置。
2. 35樓的樓梯扶手已被改短。

Scale 比例：0 5M (米)



11


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖


TOWER 1A 第1A座

1/F FLOOR PLAN 1樓樓面平面圖

Key Plan 索引圖

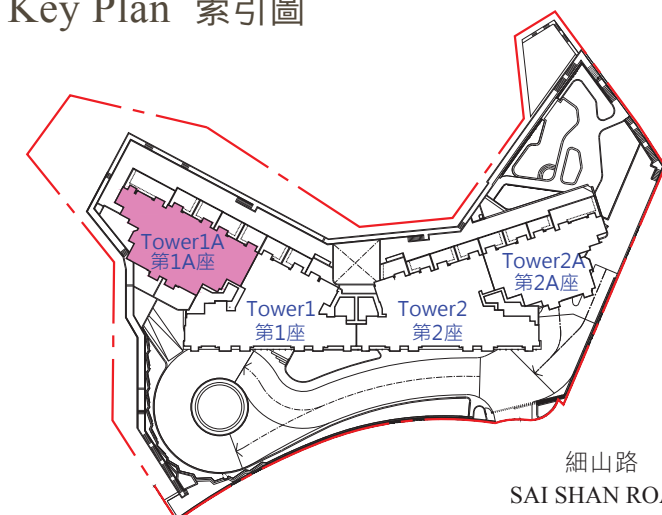

Scale 比例: 0 5M (米)



TOWER 1A 第 1A 座
1/F FLOOR PLAN 1 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1A 第1A座					
		Flat 單位					
		A	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	1/F 1樓	150, 175	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3350*, 3460*, 3600*, 3650*, 4060#	3350*, 3600*, 3650*, 3810#	3350*, 3400*, 3460*, 3600*, 3650*, 4060#	3350*, 3400*, 3460*, 3600*, 3650*, 4060#	3350*, 3400*, 3460*, 3600*, 3650*, 4060#	3350*, 3400*, 3460*, 3600*, 3650*, 4060#

* Inclusive of the thickness of mass concrete fill on sunken slab.
Inclusive of the thickness of mass concrete fill and/or planting soil on private garden.


* 包括跌級樓板上之混凝土填充層厚度。
包括私人花園上之混凝土填充層及/或種植土壤的厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

- Notes:
- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
 - "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

- 備註：
- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
 - "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖


TOWER 1A 第1A座

2/F FLOOR PLAN 2樓樓面平面圖

Key Plan 索引圖

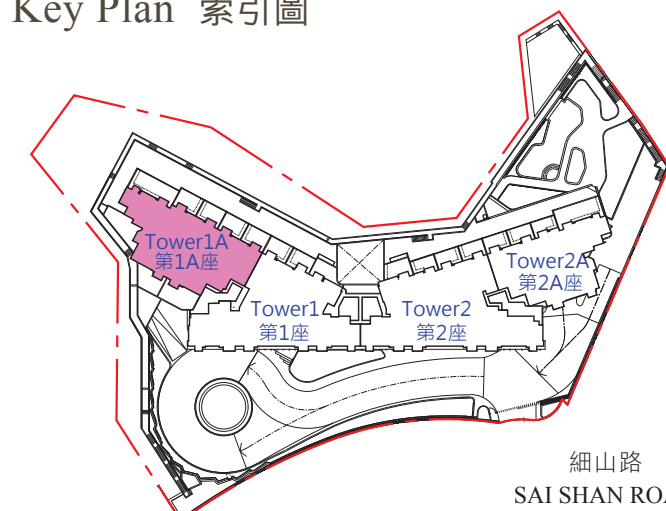

Scale 比例 : 0 5M (米)



TOWER 1A 第 1A 座
2/F FLOOR PLAN 2 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1A 第1A座					
		Flat 單位					
		A	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	2/F 2樓	150, 175	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

- Notes:
- 備註：
1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.

1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。

2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖


TOWER 1A 第1A座

3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F FLOOR PLAN 3樓、5樓至12樓、15樓至23樓、25樓至31樓樓面平面圖

Key Plan 索引圖

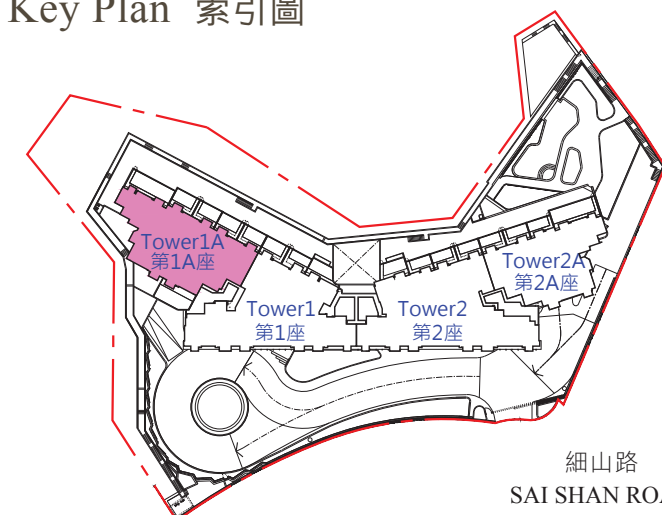

Scale 比例 : 0 5M (米)



TOWER 1A 第 1A 座

3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F FLOOR PLAN 3 樓、5 樓至 12 樓、15 樓至 23 樓、25 樓至 31 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1A 第 1A座						
		Flat 單位						
		A	B	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F 3樓、 5樓至12樓、 15樓至23樓、 25樓至31樓	150, 175	150, 175	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- 1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- 2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- 2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖


TOWER 1A 第1A座

32/F FLOOR PLAN 32樓樓面平面圖

Key Plan 索引圖

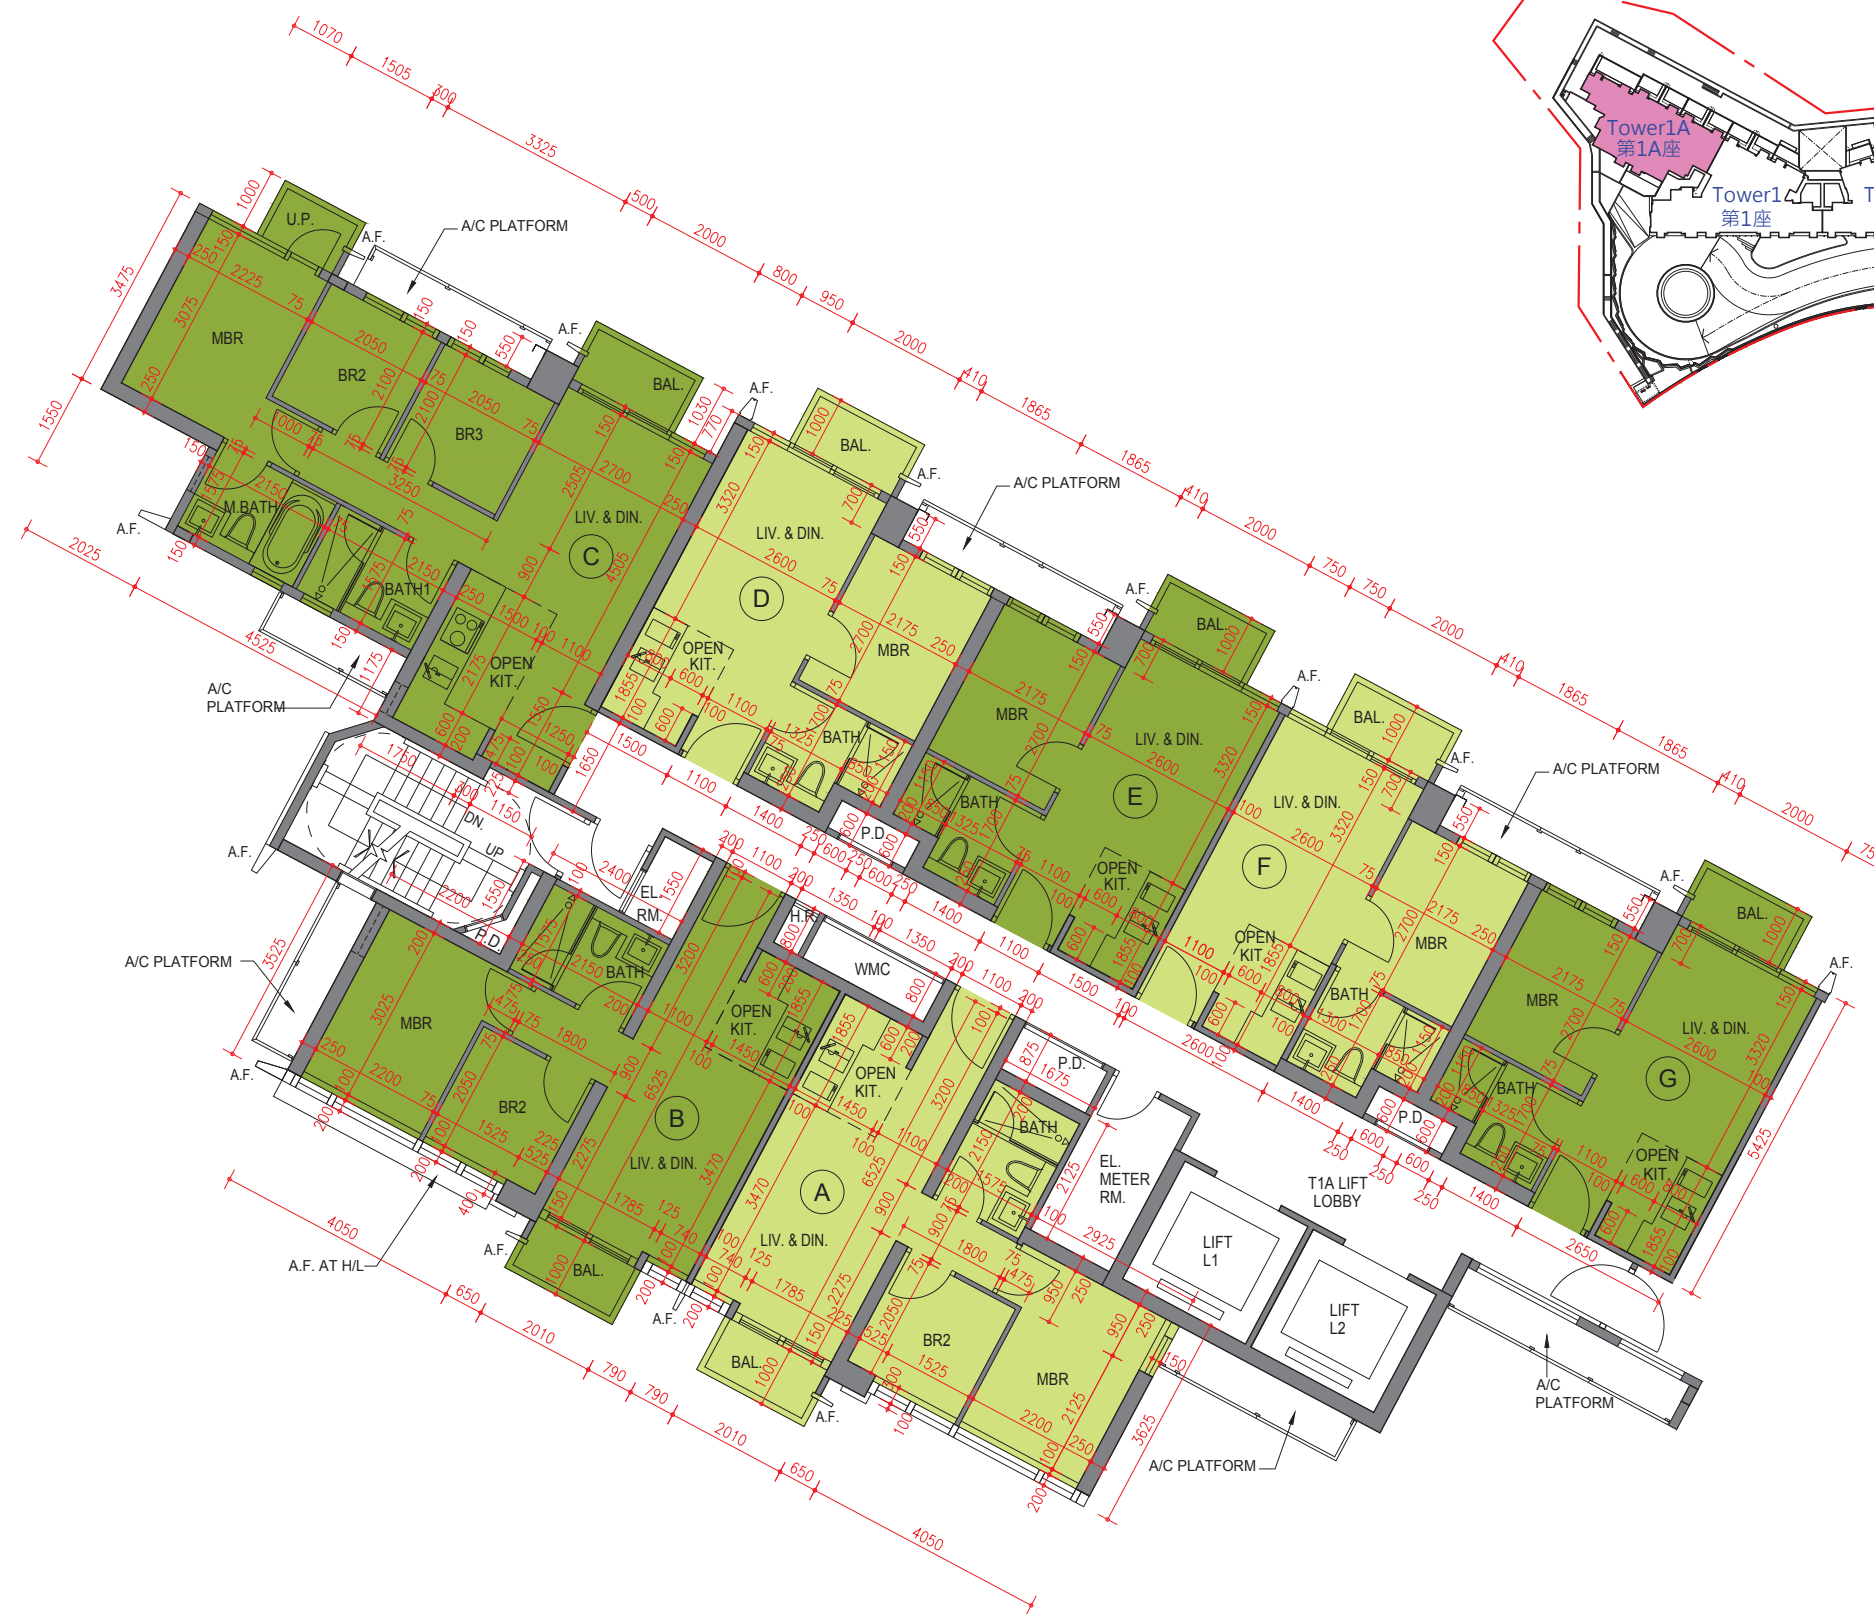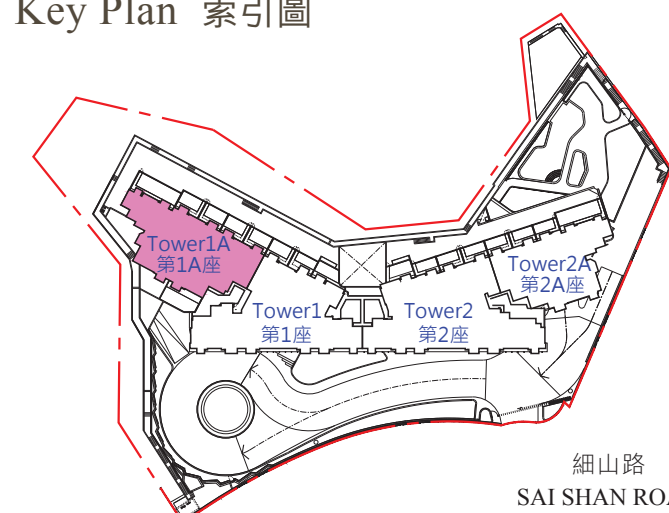

Scale 比例 : 0 5M (米)



TOWER 1A 第 1A 座
32/F FLOOR PLAN 32 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1A 第 1A座						
		Flat 單位						
		A	B	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	32/F 32樓	150, 175	150, 175	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3500, 3550*, 3800*	3050, 3400*, 3500, 3550*, 3800*, 3850*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖


TOWER 1A 第1A座

33/F FLOOR PLAN 33樓樓面平面圖

Key Plan 索引圖

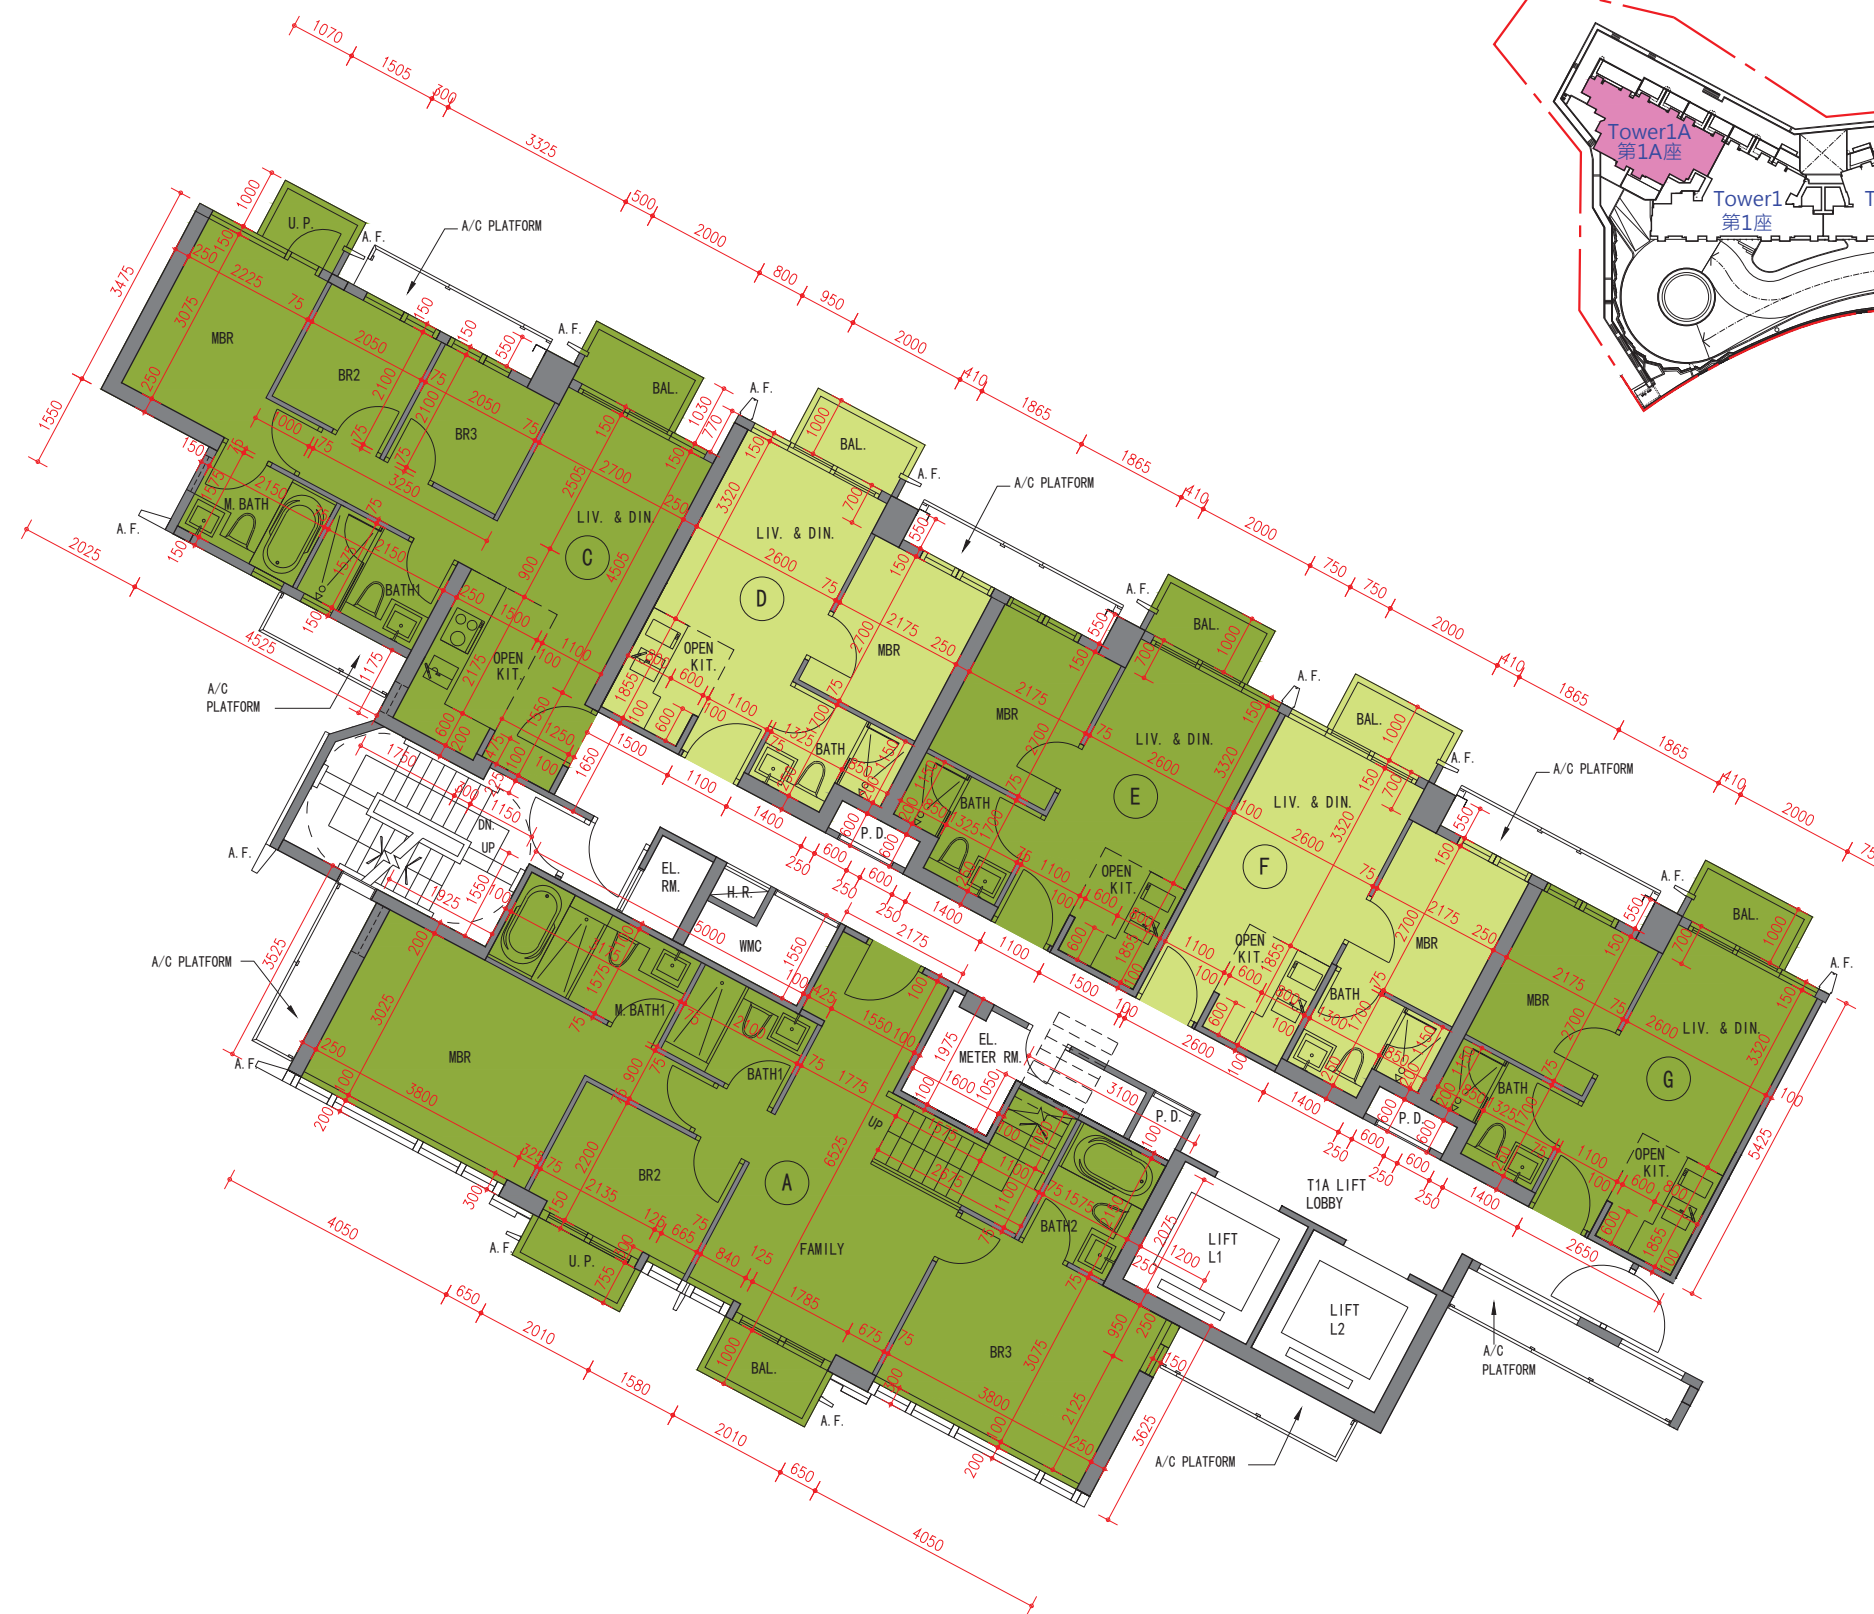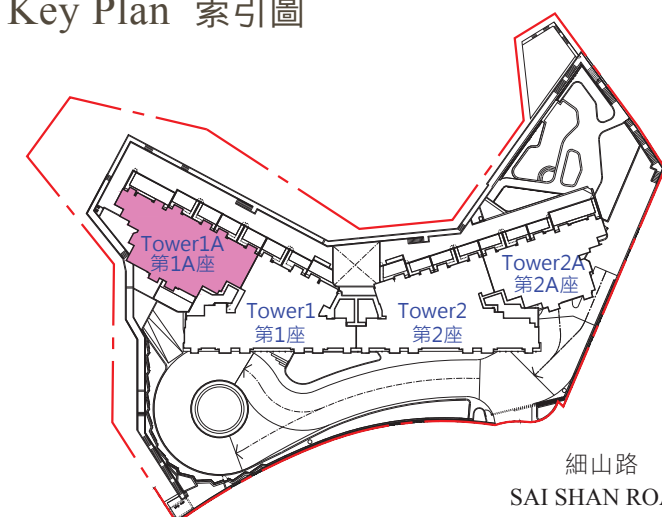

Scale 比例 : 0 5M (米)



TOWER 1A 第 1A 座
33/F FLOOR PLAN 33 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1A 第1A座					
		Flat 單位					
		A	C	D	E	F	G
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	33/F 33樓	150, 175, 200	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3100, 3200, 3450*, 3500, 3650*, 3950*	3200, 3250*, 3500*	3200, 3250*, 3500, 3550* 3750*, 3800*	3200, 3250*, 3500, 3550* 3750*, 3800*	3200, 3250*, 3500, 3550* 3750*, 3800*	3200, 3250*, 3500, 3550* 3750*, 3800*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

- Notes:
- 備註：
1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.

1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。

2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖


TOWER 1A 第1A座

35/F FLOOR PLAN 35樓樓面平面圖




備註：花槽屬本住宅物業平台一部分。該花槽面積包括在「發展項目中的住宅物業的面積」一節中所列的本住宅物業的平台面積。
Remarks: The planter is a part of the flat roof of this residential property. The area of that planter is included in the area of flat roof of this unit as set out in the section "Area of residential properties in the Development".

Key Plan 索引圖

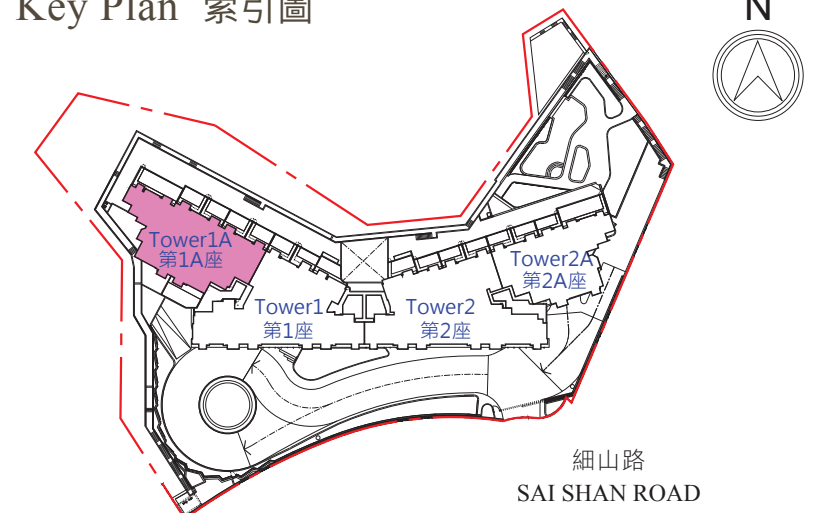

Scale 比例：0 5M (米)



TOWER 1A 第 1A 座
35/F FLOOR PLAN 35 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 1A 第 1A座
		Flat 單位
		A
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	35/F 35樓	150, 200
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3500, 3800*, 3850*, 3900*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：


- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



發展項目的住宅物業的樓面平面圖

1/F FLOOR PLAN 1 樓樓面平面圖





TOWER 2 第2座
1/F FLOOR PLAN 1樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2 第2座							
		Flat 單位							
		A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	1/F 1樓	150	150	150	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3350*, 3400*, 3600*, 3650*	3150, 3350*, 3600*, 3650*	3150, 3350*, 3600*, 3650*	3150, 3350*, 3600*, 3650*	3350*, 3460*, 3600*, 3650*, 4060#	3350*, 3400*, 3460*, 3600*, 3650*, 3810#, 4060#	3350*, 3400*, 3460*, 3600*, 3650*, 3810#	3350*, 3400*, 3460*, 3600*, 3650*, 3810#

* Inclusive of the thickness of mass concrete fill on sunken slab.
Inclusive of the thickness of mass concrete fill and/or planting soil on private garden.

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)

* 包括跌級樓板上之混凝土填充層厚度。
包括私人花園上之混凝土填充層及/或種植土壤的厚度。


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖

TOWER 2 第2座


2/F-3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F FLOOR PLAN

2樓至3樓、5樓至12樓、15樓至23樓、25樓至31樓樓面平面圖

Key Plan 索引圖

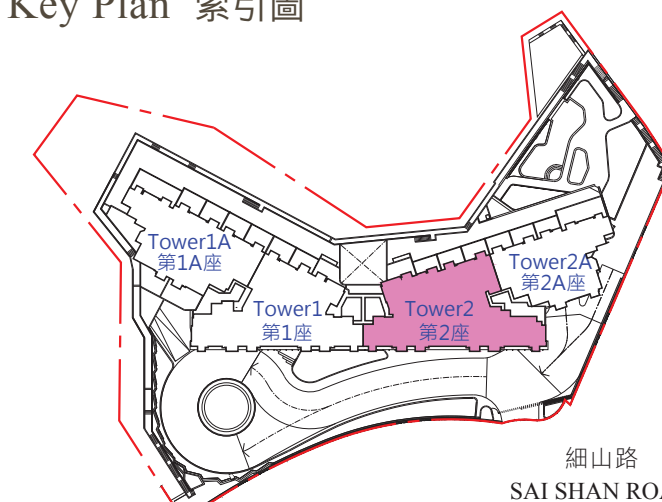

Scale 比例 : 0 5M (米)



TOWER 2 第2座

2/F-3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F FLOOR PLAN

2樓至3樓、5樓至12樓、15樓至23樓、25樓至31樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2 第2座							
		Flat 單位							
		A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	2/F-3/F, 5/F-12/F, 15/F-23/F, 25/F-31/F 2樓至3樓、 5樓至12樓、 15樓至23樓、 25樓至31樓	150	150	150	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖


TOWER 2 第2座

32/F FLOOR PLAN 32樓樓面平面圖

Key Plan 索引圖

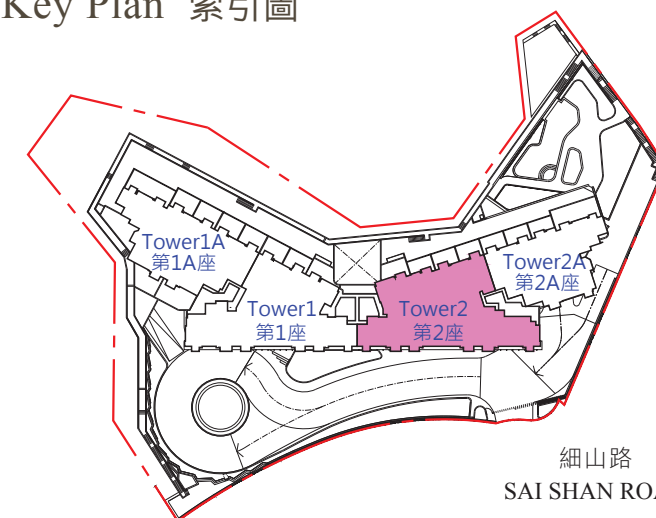

Scale 比例 : 0 5M (米)



TOWER 2 第2座
32/F FLOOR PLAN 32樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2 第2座							
		Flat 單位							
		A	B	C	D	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	32/F 32樓	150	150	150	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3050, 3100, 3450, 3500, 3550*, 3750*, 3800*	3150, 3200*, 3450*, 3500, 3550*, 3800*	3400*, 3500, 3550*, 3800*	3050, 3150, 3200*, 3450*, 3500, 3550*, 3750*, 3800*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

- Notes:
- 備註：
1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.

1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。

2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖


TOWER 2 第2座

33/F FLOOR PLAN 33樓樓面平面圖

Key Plan 索引圖

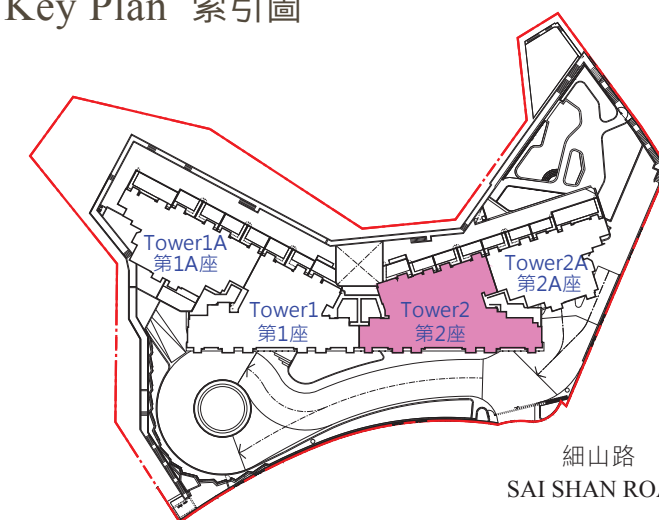

Scale 比例 : 0 5M (米)



TOWER 2 第2座
33/F FLOOR PLAN 33樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2 第2座					
		Flat 單位					
		A	B	E	F	G	H
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	33/F 33樓	150	150, 200	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3200, 3500, 3500*, 3550*, 3600*, 3850*, 3900*, 3950*	3100, 3150, 3500, 3500*, 3550*, 3850*, 3900*, 3950*	3200, 3250*, 3500, 3500*, 3800*	3200, 3250*, 3450*, 3500, 3500*, 3800*	3200, 3250*, 3500, 3500*, 3550*, 3750*, 3800*	3200, 3250*, 3500, 3550*, 3750*, 3800*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

- Notes:
- 備註：
1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.

1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。

2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。





11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖


TOWER 2 第2座

35/F FLOOR PLAN 35樓樓面平面圖

Key Plan 索引圖

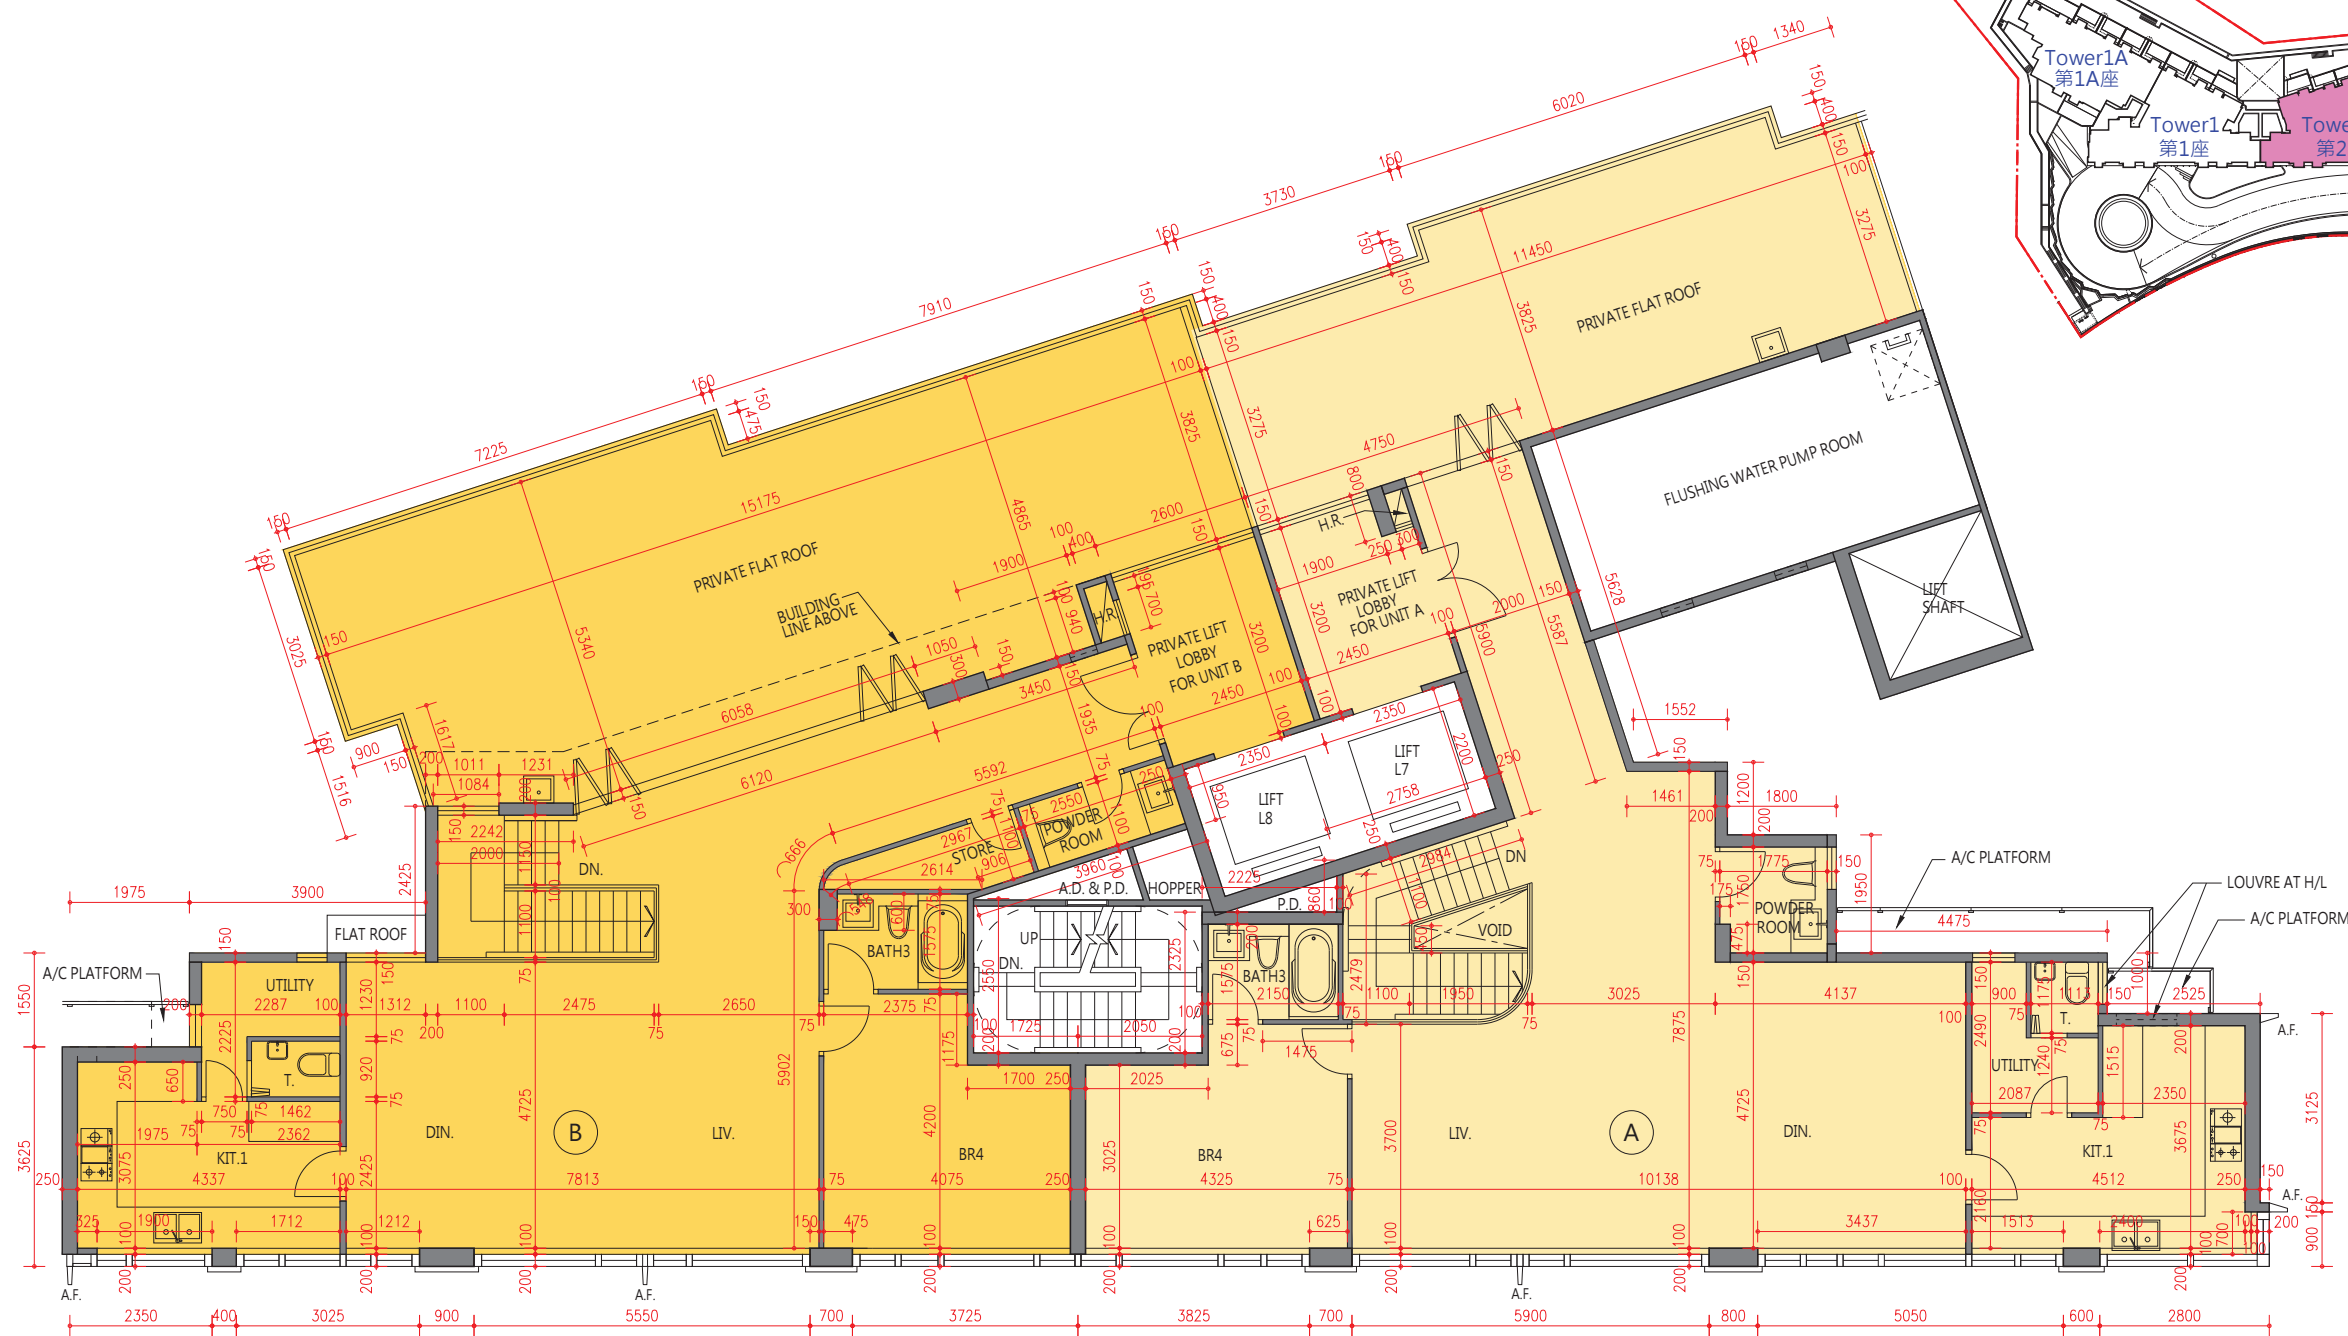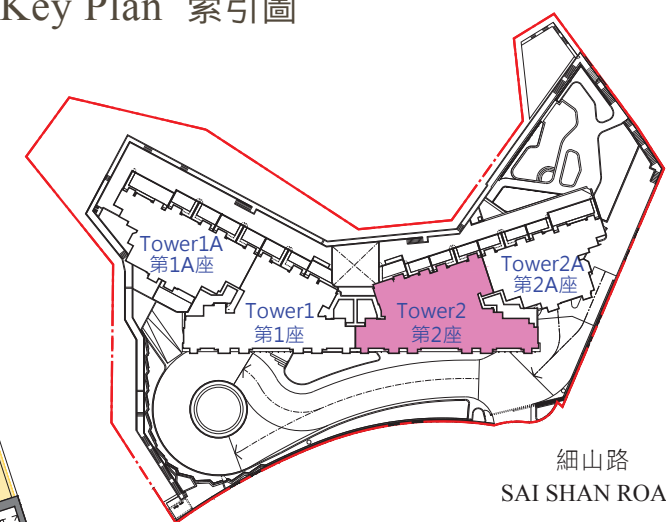

Scale 比例: 0 5M (米)



TOWER 2 第2座
35/F FLOOR PLAN 35樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2 第2座	
		Flat 單位	
		A	B
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	35/F 35樓	150, 225	150, 200
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3500, 3800*, 3850*	3500, 3850*, 3900*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖


TOWER 2A 第2A座

1/F FLOOR PLAN 1樓樓面平面圖

Key Plan 索引圖

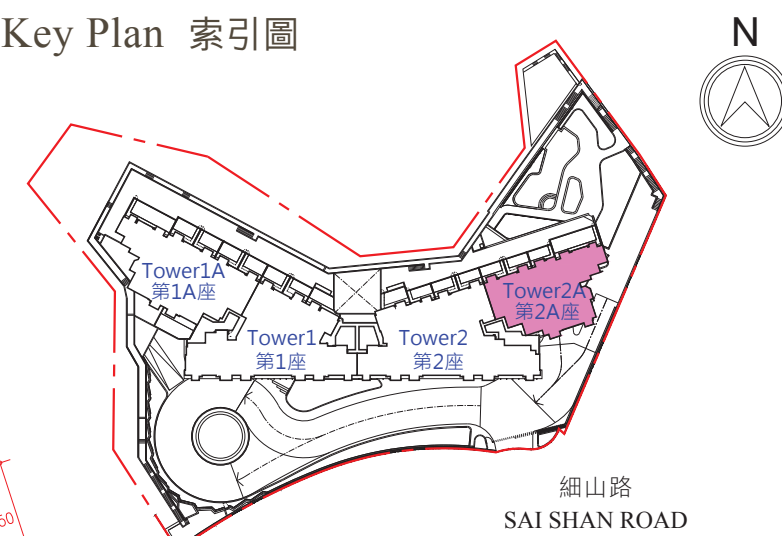

Scale 比例 : 0 5M (米)



TOWER 2A 第2A座
1/F FLOOR PLAN 1樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2A 第2A座				
		Flat 單位				
		A	B	C	D	E
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	1/F 1樓	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3300*, 3350*, 3600*, 3650*	3350*, 3460*, 3600*, 3650*, 3810#	3350*, 3460*, 3600*, 3650*, 3810#	3350*, 3400*, 3460*, 3600*, 3650*, 3810#	3350*, 3400*, 3460*, 3600*, 3650*, 3810#

* Inclusive of the thickness of mass concrete fill on sunken slab.

Inclusive of the thickness of mass concrete fill and/or planting soil on private garden.

* 包括跌級樓板上之混凝土填充層厚度。

包括私人花園上之混凝土填充層及/或種植土壤的厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT 發展項目的住宅物業的樓面平面圖

TOWER 2A 第2A座


2/F-3/F, 5/F-12/F, 15/F-23/F, 25/F-30/F FLOOR PLAN

2樓至3樓、5樓至12樓、15樓至23樓、25樓至30樓樓面平面圖

Key Plan 索引圖

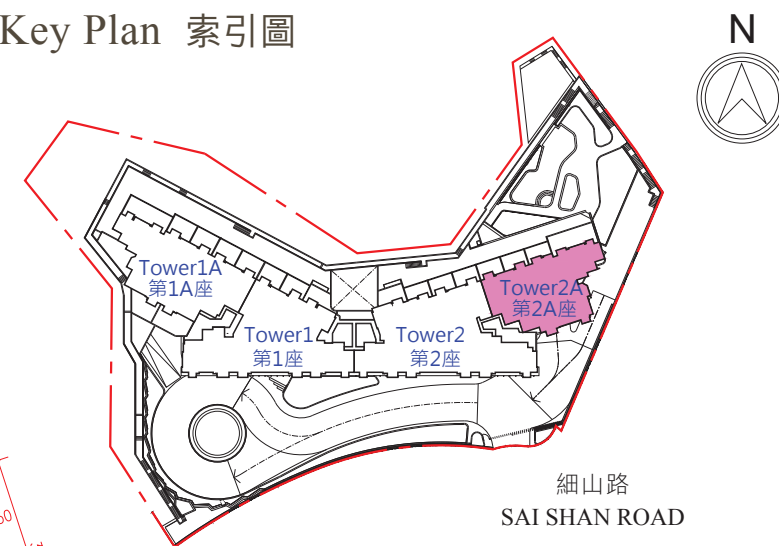

Scale 比例 : 0 5M (米)



TOWER 2A 第2A座

2/F-3/F, 5/F-12/F, 15/F-23/F, 25/F-30/F FLOOR PLAN

2樓至3樓、5樓至12樓、15樓至23樓、25樓至30樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2A 第2A座				
		Flat 單位				
		A	B	C	D	E
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	2/F-3/F, 5/F-12/F, 15/F-23/F, 25/F-30/F 2樓至3樓、 5樓至12樓、 15樓至23樓、 25樓至30樓	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*

* Inclusive of the thickness of mass concrete fill on sunken slab.

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)

* 包括跌級樓板上之混凝土填充層厚度。


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖


TOWER 2A 第2A座

31/F FLOOR PLAN 31樓樓面平面圖

Key Plan 索引圖

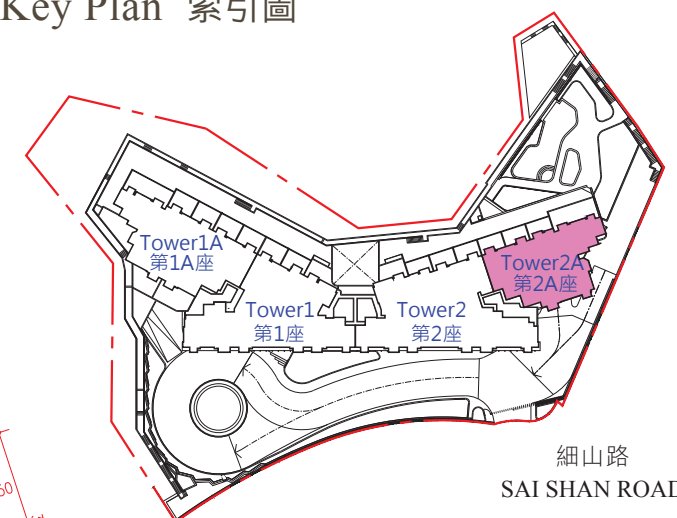

Scale 比例 : 0 5M (米)



TOWER 2A 第2A座
31/F FLOOR PLAN 31樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2A 第2A座				
		Flat 單位				
		A	B	C	D	E
5The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	31/F 31樓	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*	3150, 3150*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖


TOWER 2A 第2A座

32/F FLOOR PLAN 32樓樓面平面圖

Key Plan 索引圖

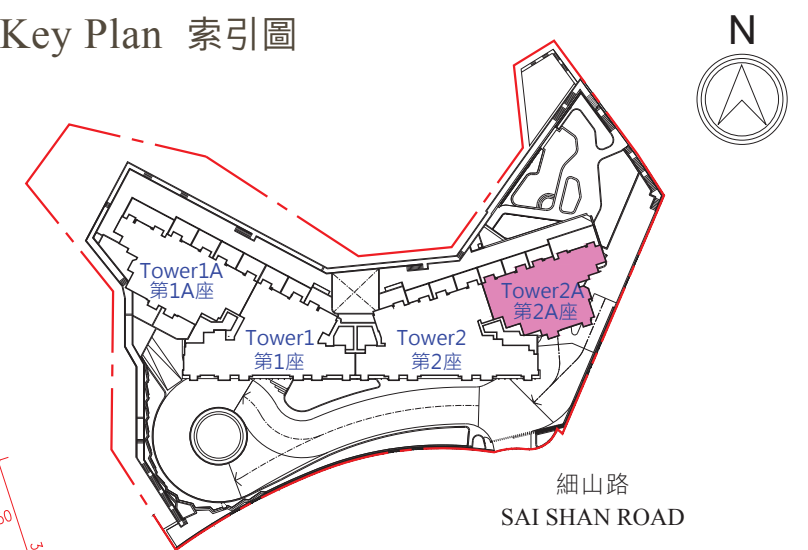

Scale 比例 : 0 5M (米)



TOWER 2A 第2A座
32/F FLOOR PLAN 32樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2A 第2A座				
		Flat 單位				
		A	B	C	D	E
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	32/F 32樓	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3450*, 3500, 3550*, 3800*, 3850*	3500, 3500*	3500, 3500*	3500, 3500*	3500, 3500*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。




11

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT
發展項目的住宅物業的樓面平面圖


TOWER 2A 第2A座

33/F FLOOR PLAN 33樓樓面平面圖

Key Plan 索引圖

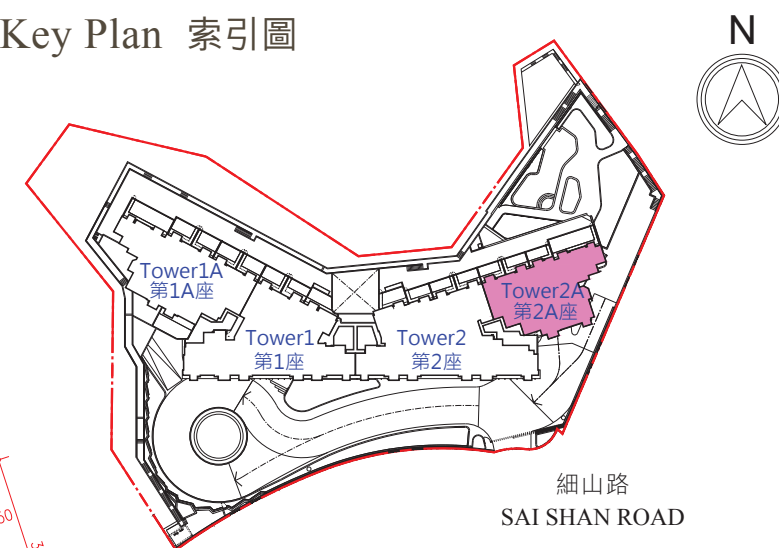

Scale 比例 : 0 5M (米)



TOWER 2A 第 2A 座
33/F FLOOR PLAN 33 樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2A 第2A座				
		Flat 單位				
		A	B	C	D	E
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	33/F 33樓	150	150	150, 175	150, 175	150, 175
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3000, 3400*, 3500, 3850*, 3900*	2700, 3200, 3250*, 3450, 3500, 3500*	3200, 3250*, 3500, 3500*, 3800*	3200, 3250*, 3500, 3550*, 3750*, 3800*	3200, 3250*, 3500, 3550*, 3750*, 3800*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)


因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

- Notes:
- 備註：
1. Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.

1. 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。

2. "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

2. "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。



11



FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

TOWER 2A 第2A座


35/F FLOOR PLAN 35樓樓面平面圖

Key Plan 索引圖

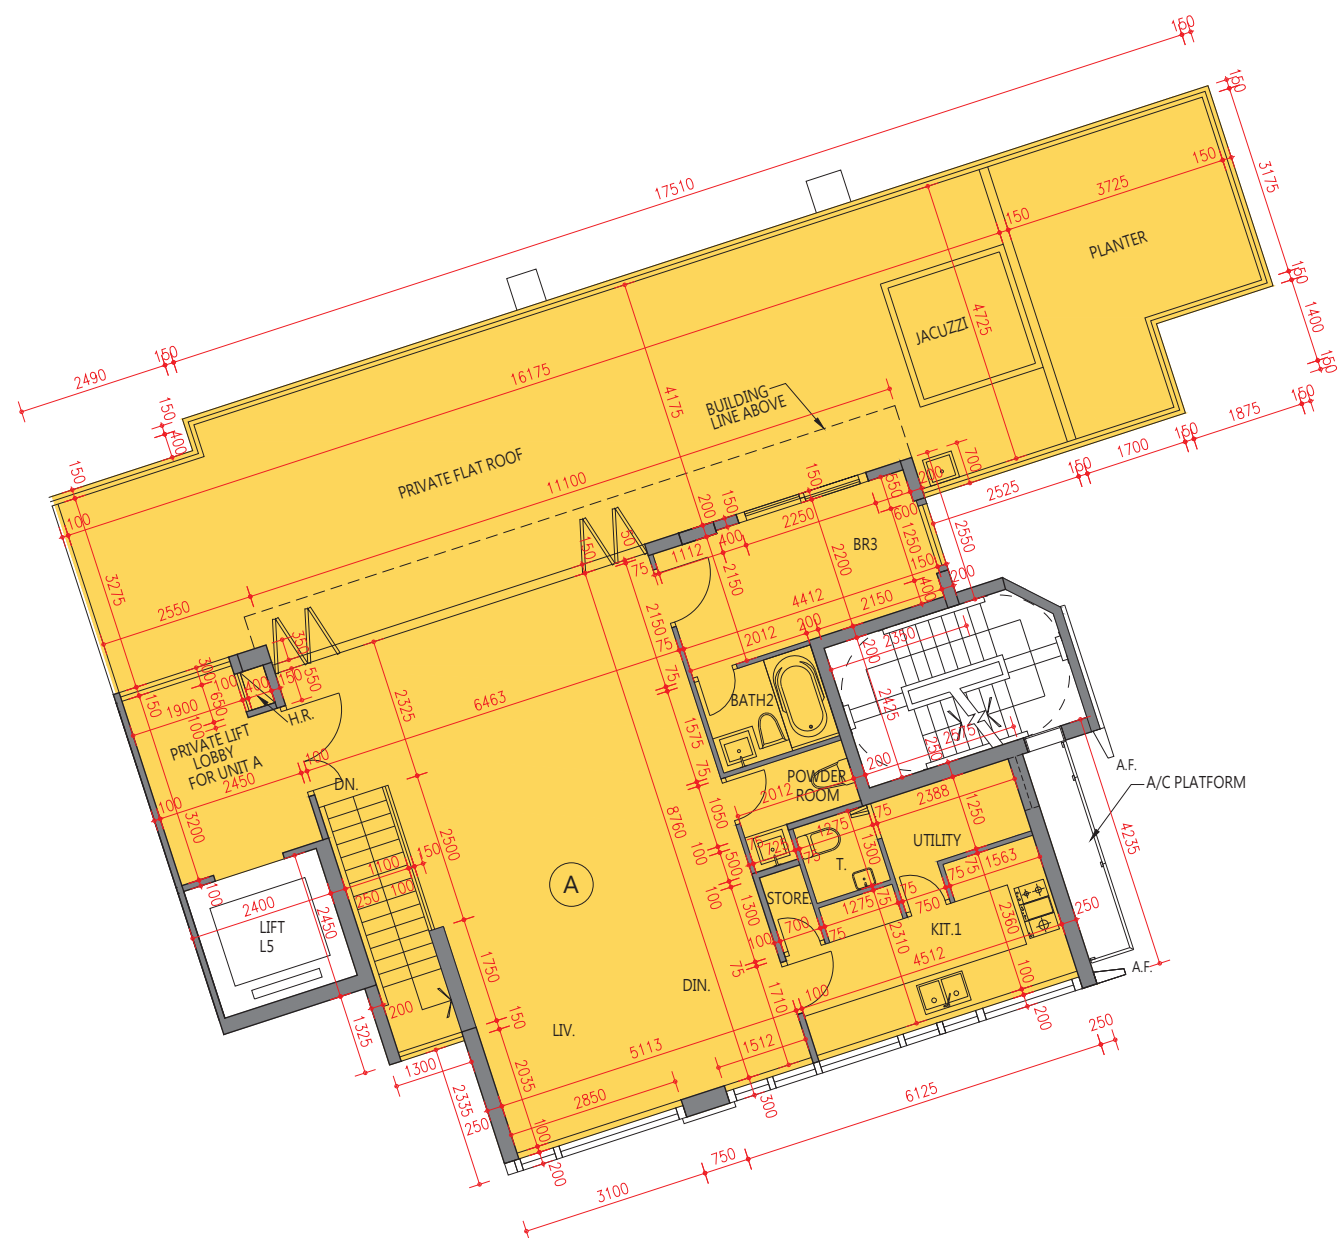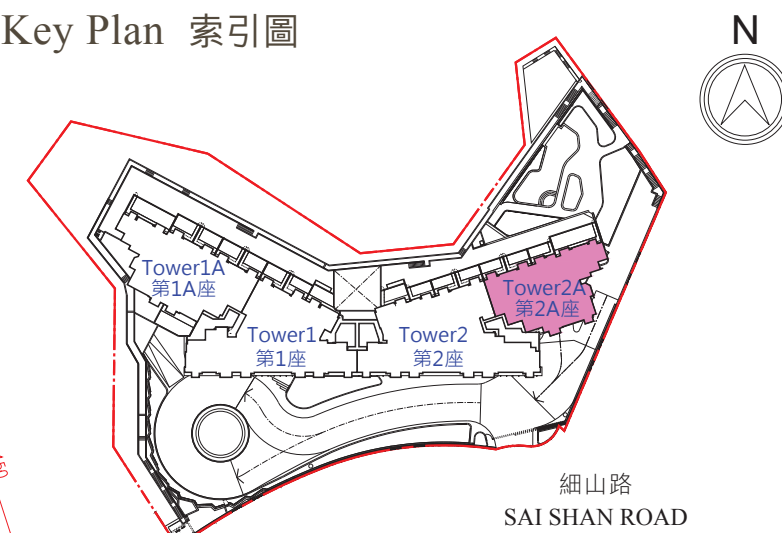

備註：花槽屬本住宅物業平台一部分。該花槽面積包括在「發展項目中的住宅物業的面積」一節中所列的本住宅物業的平台面積。
Remarks: The planter is a part of the flat roof of this residential property. The area of that planter is included in the area of flat roof of this unit as set out in the section "Area of residential properties in the Development".

Scale 比例：0 5M (米)



TOWER 2A 第2A座
35/F FLOOR PLAN 35樓樓面平面圖

Description of Residential Property 物業的描述	Floor 樓層	Tower 2A 第2A座
		Flat 單位
		A
The thickness of the floor slabs (excluding plaster) of each residential property (mm) 每個住宅物業的樓板 (不包括灰泥) 的厚度 (毫米)	35/F 35樓	150
The floor-to-floor height of each residential property (mm) 每個住宅物業的層與層之間的高度 (毫米)		3500, 3550*, 4000*

* Inclusive of the thickness of mass concrete fill on sunken slab.

* 包括跌級樓板上之混凝土填充層厚度。

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This statement required in Section 10(2)(e) in Part 1 of Schedule 1 of the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Development.)

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此乃根據《一手住宅物業銷售條例》（第621章）附表1第1部第10(2)(e)條所規定的陳述並不適用於發展項目。)

Notes:

- Please refer to page 21 of this sales brochure for legend of the terms and abbreviations in studying the floor plans of residential properties in the development.
- "Floor-to-floor height" refers to the height between the top surface of the structural slab of floor and the top surface of the structural slab of its immediate upper floor.

備註：

- 請參閱本售樓說明書第21頁之圖例以協助閱讀此部份的發展項目的住宅物業的樓面平面圖及其顯示之名稱和簡稱。
- "層與層之間的高度"指該樓層之石屎地台面與上一層石屎地台面之高度距離。