


# 第1座 (1B) TOWER 1

## 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 17樓 17/F



索引圖  
Key Plan





第1座  
TOWER 1 (1B)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
17樓 17/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm and 600mm

The floor-to-floor height of each residential property: 3.15m



The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

# 第2座 TOWER 2 (2A)

## 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 6樓 6/F

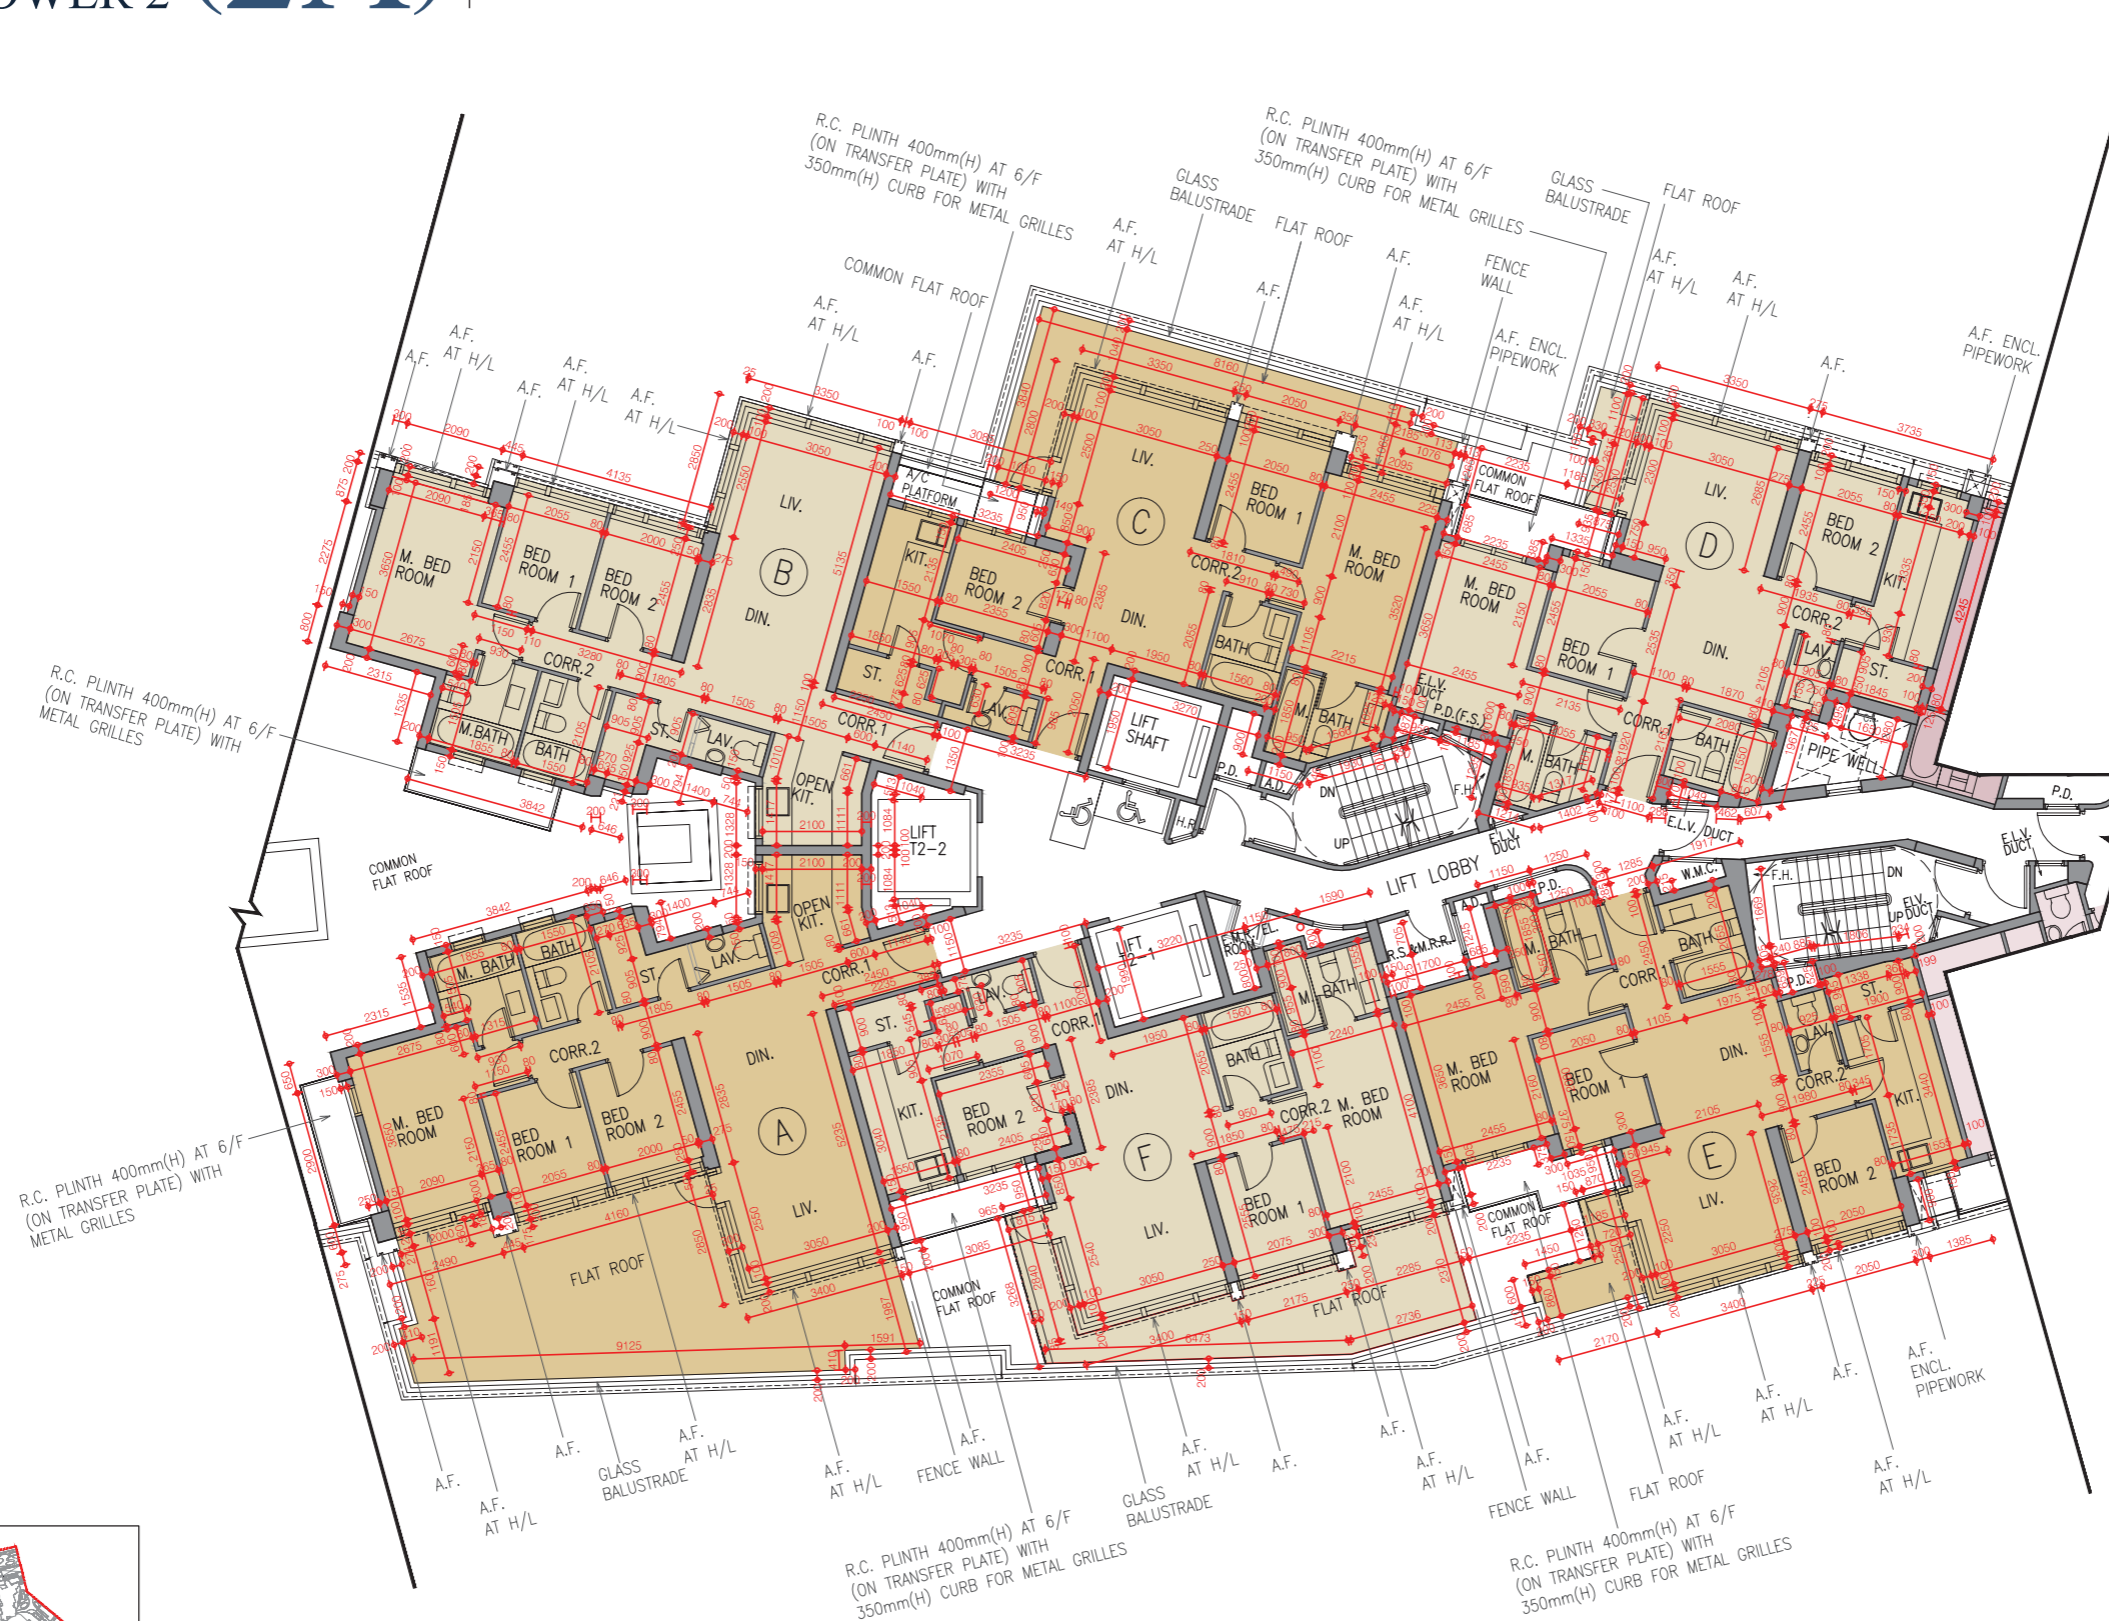

索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :

## 第2座 TOWER 2 (2A)

### 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 6樓 6/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：A及B單位：2.8米、3.15米、3.6米及3.95米；C單位：2.8米、2.9米、3.1米、3.15米、3.35米、3.6米、3.7米及3.95米；D單位：2.8米、3.15米、3.2米、3.55米、3.6米、3.7米及3.95米；E及F單位：2.8米、2.9米、3.15米、3.6米、3.7米及3.95米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台轉換層結構樓板跌級部分的混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: Units A and B: 2.8m, 3.15m, 3.6m and 3.95m; Unit C: 2.8m, 2.9m, 3.1m, 3.15m, 3.35m, 3.6m, 3.7m and 3.95m; Unit D: 2.8m, 3.15m, 3.2m, 3.55m, 3.6m, 3.7m and 3.95m; Units E and F: 2.8m, 2.9m, 3.15m, 3.6m, 3.7m and 3.95m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill in the sunken part of the transfer plate structural slab on the floor of the residential property concerned.

# 第2座 TOWER 2 (2A)

## 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 7樓 7/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :



第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
7樓 7/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m


The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
8樓 8/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :



第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
8樓 8/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:

- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.




第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
9樓 9/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :



第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
9樓 9/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m


The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

# 第2座 TOWER 2 (2A)

## 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 10樓及12樓 10/F and 12/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :



第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
10樓及12樓 10/F and 12/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
11樓及15樓 11/F and 15/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :



第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
11樓及15樓 11/F and 15/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
16樓 16/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :



第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
16樓 16/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:

- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.




第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
17樓 17/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :



第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
17樓 17/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

# 第2座 TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
18樓至20樓 18/F to 20/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :

## 第2座 TOWER 2 (2A)

### 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 18樓至20樓 18/F to 20/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

# 第2座 TOWER 2 (2A)

## 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 21樓 21/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :



第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
21樓 21/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
22樓 22/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :

## 第2座 TOWER 2 (2A)

### 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 22樓 22/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:

- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.




第2座  
TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
23樓 23/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :

## 第2座 TOWER 2 (2A)

### 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 23樓 23/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

# 第2座 TOWER 2 (2A)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
25樓至33樓及35樓至39樓 25/F to 33/F and 35/F to 39/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :

## 第2座 TOWER 2 (2A)

### 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 25樓至33樓及35樓至39樓 25/F to 33/F and 35/F to 39/F

每個住宅物業的樓板(不包括灰泥)的厚度：25樓至38樓：150毫米、200毫米、450毫米及600毫米；39樓：200毫米、250毫米、500毫米及650毫米

每個住宅物業的層與層之間的高度：25樓至38樓：3.15米；39樓：A及B單位：3.5米及3.85米；C、E及F單位：3.5米、3.75米及3.85米；D單位：3.5米、3.75米、3.85米及3.9米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 25/F to 38/F: 150mm, 200mm, 450mm and 600mm; 39/F: 200mm, 250mm, 500mm and 650mm

The floor-to-floor height of each residential property: 25/F to 38/F: 3.15m; 39/F: Units A and B: 3.5m and 3.85m; Units C, E and F: 3.5m, 3.75m and 3.85m; Unit D: 3.5m, 3.75m, 3.85m and 3.9m


The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

# 第2座 TOWER 2 (2B)

## 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 6樓 6/F



索引圖 Key Plan



Scale : 0 2 6 10M/米  
比例 :

## 第2座 TOWER 2 (2B)

### 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 6樓 6/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：A單位：2.8米、2.9米、3.15米、3.6米、3.7米及3.95米；B及C單位：2.8米、2.85米、3.15米、3.6米、3.65米及3.95米；D單位：2.8米、3.15米、3.6米及3.95米；E單位：2.8米、2.9米、3.15米、3.2米、3.55米、3.6米、3.7米及3.95米；G單位：2.75米、2.8米、2.9米、3.15米、3.55米、3.6米、3.7米及3.95米；H單位：2.8米、3.15米、3.55米、3.6米及3.95米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台轉換層結構樓板跌級部分的混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: Unit A: 2.8m, 2.9m, 3.15m, 3.6m, 3.7m and 3.95m; Units B and C: 2.8m, 2.85m, 3.15m, 3.6m, 3.65m and 3.95m; Unit D: 2.8m, 3.15m, 3.6m and 3.95m; Unit E: 2.8m, 2.9m, 3.15m, 3.2m, 3.55m, 3.6m, 3.7m and 3.95m; Unit G: 2.75m, 2.8m, 2.9m, 3.15m, 3.55m, 3.6m, 3.7m and 3.95m; Unit H: 2.8m, 3.15m, 3.55m, 3.6m and 3.95m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill in the sunken part of the transfer plate structural slab on the floor of the residential property concerned.

第2座  
TOWER 2 (2B)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
7樓 7/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :

## 第2座 TOWER 2 (2B)

### 期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase 7樓 7/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:

- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.







第2座  
TOWER 2 (2B)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
8樓 8/F

每個住宅物業的樓板(不包括灰泥)的厚度：150毫米、200毫米、450毫米及600毫米

每個住宅物業的層與層之間的高度：3.15米

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。  
(註：此根據《一手住宅物業銷售條例》(第621章)附表1第1部第10(2)(e)條所規定的陳述並不適用於期數。)

備註：

- 1) 左方樓面平面圖中顯示之名詞及簡稱之詞彙表請參閱「期數的住宅物業的樓面平面圖」一節首頁。
- 2) 第1座(1A及1B)及第2座(2A及2B)住宅樓層不設13樓、14樓、24樓及34樓。第1座(1A及1B)及第2座(2A及2B)天台為庇護層。
- 3) 上述每個住宅物業的層與層之間的高度指相關住宅物業樓層之石屎地台面與上一層石屎地台面之高度距離。部分上述住宅物業的層與層之間的高度包括相關住宅物業地台跌級樓板之混凝土填充層深度。

The thickness of the floor slabs (excluding plaster) of each residential property: 150mm, 200mm, 450mm and 600mm

The floor-to-floor height of each residential property: 3.15m

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors. (Note: This required statement under Section 10(2)(e) in Part 1 of Schedule 1 to the Residential Properties (First-hand Sales) Ordinance (Cap.621) is not applicable to the Phase.)

Remarks:


- 1) Please refer to the first page of the section “Floor plans of residential properties in the Phase” for glossary of the terms and abbreviations shown in the floor plan on the left.
- 2) Residential floors 13/F, 14/F, 24/F and 34/F of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) are omitted. Roof of Tower 1 (1A and 1B) and Tower 2 (2A and 2B) is a refuge floor.
- 3) The aforesaid floor-to-floor height of each residential property refers to the height between the top surface of the structural slab of the floor of the residential property concerned and the top surface of the structural slab of its immediate upper floor. Some of the aforesaid floor-to-floor heights of residential properties are inclusive of the depth of concrete fill on sunken slab on the floor of the residential property concerned.

第2座  
TOWER 2 (2B)

期數的住宅物業的樓面平面圖 Floor plans of residential properties in the Phase  
9樓 9/F



索引圖  
Key Plan



Scale : 0 2 6 10M/米  
比例 :